


TaNFilm® Precision SIP Network Commercial and MIL Qualified

4700 Series

- Inherent reliability
- MIL-PRF-83401 qualified
- Custom configuration available
- Bonded leads not susceptible to solder reflow problems
- Absolute tolerance to $\pm 0.1\%$ - ratio accuracy to $\pm 0.01\%$
- Absolute TCR to $\pm 15\text{ppm}/^\circ\text{C}$ - TC tracking to $\pm 5\text{ppm}/^\circ\text{C}$

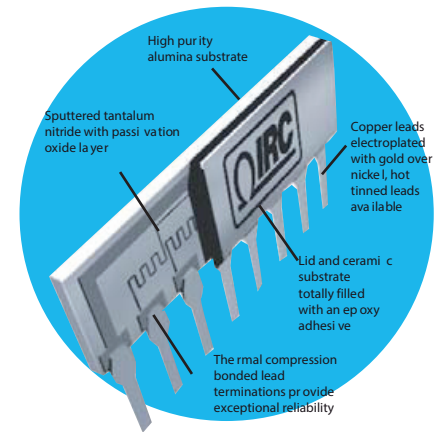

 All Pb-free parts comply with EU Directive 2011/65/EU (RoHS2)

The IRC 4700 Series is the ultimate combination of precision performance, reliability, and long term stability in a low profile, TaNFilm® SIP package. Rugged welded lead construction combined with the inherent passivation characteristics of tantalum nitride ensure superior ongoing performance over the installed life of the part.

Visit our website to view a graphical demonstration of IRC's TaNFilm reliability and performance features.

Commercial Product Capability Data

Schematic	Resistance Range (Ω)	Absolute Tolerance	Ratio Tolerance	Absolute TCR ($\text{ppm}/^\circ\text{C}$)	Tracking TCR ($\text{ppm}/^\circ\text{C}$)	Element Power (mW)
C	49.9 - 99.9	F, G, J	F, G	$\pm 50; \pm 100; \pm 300$	± 20	120
	100 - 200	B, D, F, G, J	D, F, G	$\pm 25; \pm 50; \pm 100; \pm 300$	± 15	
	201 - 1.9K	B, D, F, G, J	B, D, F, G	$\pm 25; \pm 50; \pm 100; \pm 300$	± 10	
	2.0K - 200K	B, D, F, G, J	A, B, D, F, G	$\pm 15; \pm 25; \pm 50; \pm 100; \pm 300$	± 5	
G	20 - 49.9	F, G, J	F, G	$\pm 50; \pm 100; \pm 300$	± 20	200
	50.0 - 199	D, F, G, J	B, D, F, G	$\pm 25; \pm 50; \pm 100; \pm 300$	± 5	
	200 - 999	B, D, F, G, J	A, B, D, F, G	$\pm 25; \pm 50; \pm 100; \pm 300$	± 5	
	1.0K - 100K	B, D, F, G, J	T, Q, A, B, D, F, G	$\pm 15; \pm 25; \pm 50; \pm 100; \pm 300$	± 5	
	101K - 400K	B, D, F, G, J	A, B, D, F, G	$\pm 15; \pm 25; \pm 50; \pm 100; \pm 300$	± 5	
F	49.9 - 99.9	F, G, J	F, G	$\pm 50; \pm 100; \pm 300$	± 20	120
	100 - 199	F, G, J	D, F, G	$\pm 25; \pm 50; \pm 100; \pm 300$	± 10	
	200 - 999	B, D, F, G, J	B, D, F, G	$\pm 25; \pm 50; \pm 100; \pm 300$	± 5	
	1.0K - 200K	B, D, F, G, J	A, B, D, F, G	$\pm 15; \pm 25; \pm 50; \pm 100; \pm 300$	± 5	

Consult factory for tighter tolerances and TCR. Custom circuits and special testing available.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

4700 Series

MIL-PRF-83401 QPL Capability Data

Schematic	Resistance Range	Absolute Tolerance	Element Power	Size	Characteristic
C,G	100 - 100K	B, F, G, J	120	6, 8, 10	M, H, K

Package Specification Data

Schematic	Package Power (mW)			Voltage Rating	Temperature Range	Substrate	Lead Finish	Noise
	6-pin	8-pin	10-pin					
C, F (MIL and Commercial)	600	840	1080	\sqrt{PxR} not to exceed 100V	-65°C to +125°C	99.6% Alumina	Gold Plate (60/40 Sn/Pb available)	<-30dB
G (MIL)	360	480	600					
G (Commercial)	600	800	1000					

Environmental Data


Test Per MIL-PRF-83401	MIL-PRF-83401 ΔR Limits			TaNFilm® Test Data ΔR	
	M	K	H	Max	Typical
Thermal Shock And Power Conditioning	±0.7%	±0.7%	±0.5%	±0.10%	±0.02%
Low Temperature Operation	±0.5%	±0.25%	±0.1%	±0.05%	±0.02%
Short-term Overload	±0.5%	±0.25%	±0.1%	±0.1%	±0.02%
Terminal Strength	±0.25%	±0.25%	±0.1%	±0.1%	±0.02%
Resistance To Solder Heat	±0.25%	±0.25%	±0.1%	±0.1%	±0.02%
Moisture Resistance	±0.5%	±0.5%	±0.4%	±0.1%	±0.02%
Shock	±0.25%	±0.25%	±0.25%	±0.1%	±0.02%
Vibration	±0.25%	±0.25%	±0.25%	±0.1%	±0.02%
Life	±2.0%	±0.5%	±0.5%	±0.1%	±0.02%
High Temperature Exposure	±1.0%	±0.5%	±0.2%	±0.1%	±0.02%
Low Temperature Storage	±0.5%	±0.25%	±0.1%	±0.1%	±0.02%
25°C Double Load	±2.0%	±0.5%	±0.5%	±0.05%	±0.02%

General Note


TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

4700 Series

Schematic Data

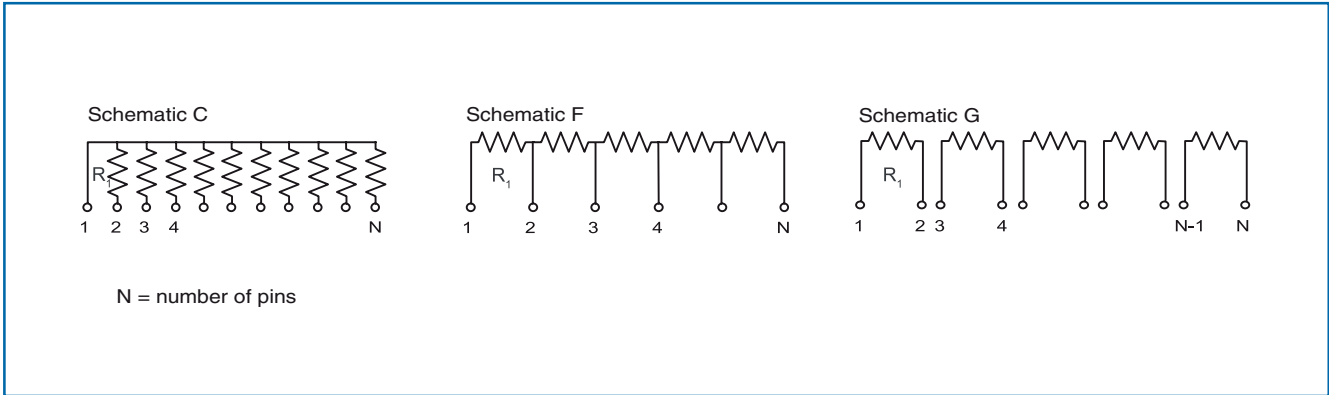

Physical Data

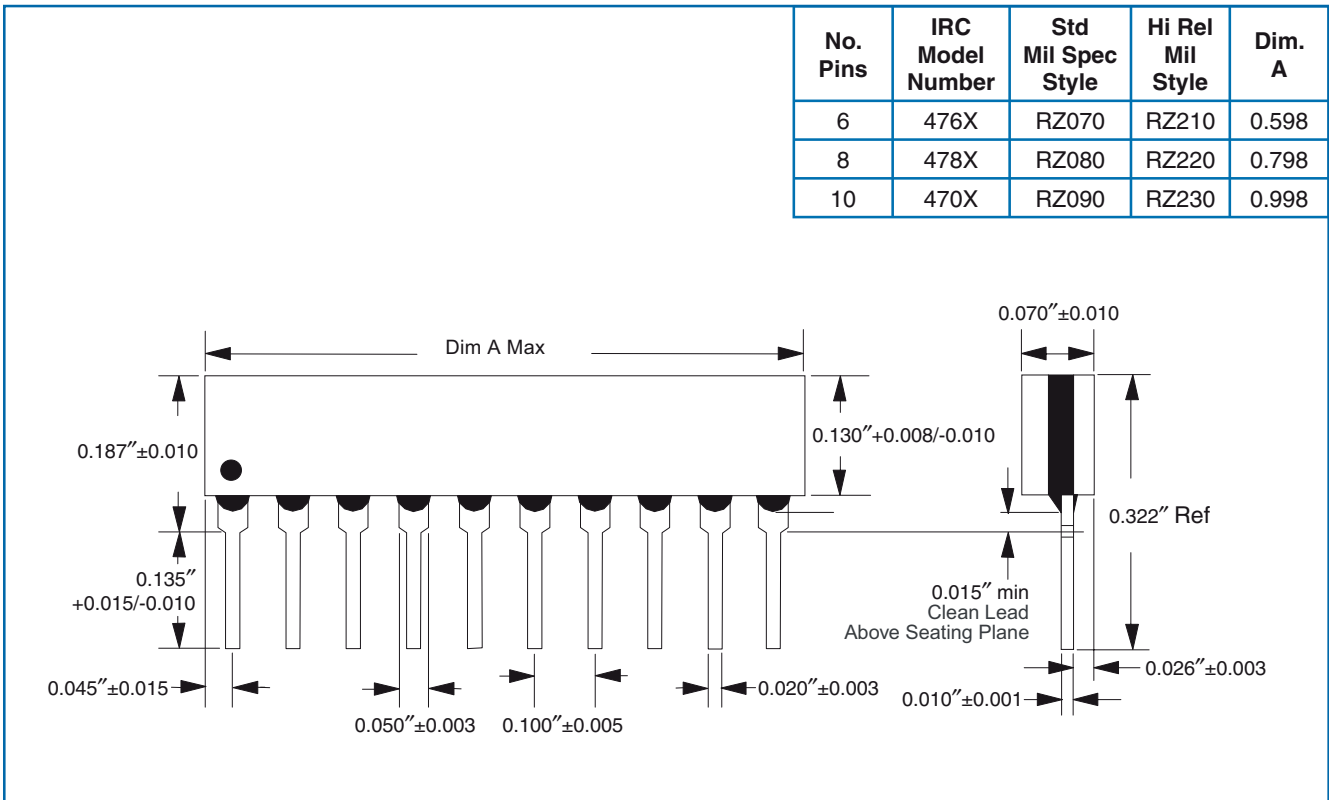

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

4700 Series

Ordering Data - Commercial

Sample Part No. SIP - 4781 - 03 - 1001 F B

Model
 4761 = 6-pin SIP, schematic C, gold terminations
 4761SD = 6-pin SIP, schematic C, 60/40 Sn/Pb terminations
 4768 = 6-pin SIP, schematic F, gold terminations
 4768SD = 6-pin SIP, schematic F, 60/40 Sn/Pb terminations
 4769 = 6-pin SIP, schematic G, gold terminations
 4769SD = 6-pin SIP, schematic G, 60/40 Sn/Pb terminations

4781 = 8-pin SIP, schematic C, gold terminations
 4781SD = 8-pin SIP, schematic C, 60/40 Sn/Pb terminations
 4788 = 8-pin SIP, schematic F, gold terminations
 4788SD = 8-pin SIP, schematic F, 60/40 Sn/Pb terminations
 4789 = 8-pin SIP, schematic G, gold terminations
 4789SD = 8-pin SIP, schematic G, 60/40 Sn/Pb terminations

4701 = 10-pin SIP, schematic C, gold terminations
 4701SD = 10-pin SIP, schematic C, 60/40 Sn/Pb terminations
 4708 = 10-pin SIP, schematic F, gold terminations
 4708SD = 10-pin SIP, schematic F, 60/40 Sn/Pb terminations
 4709 = 10-pin SIP, schematic G, gold terminations
 4709SD = 10-pin SIP, schematic G, 60/40 Sn/Pb terminations

Absolute TCR
 01 = ±100ppm/°C; 02 = ±50ppm/°C; 03 = ±25ppm/°C; 11 = ±15ppm/°C

Resistance
 Standard 4-digit MIL resistance code
 Example: 1001 = 1000Ω; 50R0=50Ω

Absolute Tolerance
 J = ±5%; G = ±2%; F = ±1.0%; D = ±0.5%; B = ±0.1%

Optional Ratio Tolerance to R₁
 F = ±1.0%; D = ±0.5%; C = ±0.25%; B = ±0.1%; A = ±0.05%; Q = ±0.02%; T = ±0.01%

Custom schematics and screening available.
 Screening available for non-QPL values and tolerances. Contact factory for ordering information.

Ordering Data - Military (MIL-PRF-83401)

Sample Part No. M83401 - 08 - H - 1002 - F - G

Model
 M83401 = Military qualified resistor network

Size
 07 = RZ060 6-pin SIP
 08 = RZ080 8-pin SIP
 09 = RZ090 10-pin SIP
 21 = RZ210 Hi-Rel 6-pin SIP
 22 = RZ220 Hi-Rel 8-pin SIP
 23 = RZ230 Hi-Rel 10-pin SIP

Characteristic per MIL-PRF-83401
 M; K; H

Resistance
 Standard 4-digit MIL resistance code
 Example: 1000 = 100Ω; 1001=1000Ω

Absolute Tolerance Code
 J = ±5%; G = ±2%; F = ±1%; B = ±0.1%

Schematic
 C; G

Standard termination is gold plate. Contact factory for optional 60/40 Sn/Pb hot solder dip finish.
 Screening available for non-QPL values and tolerances. Contact factory for ordering information.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
 All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru