

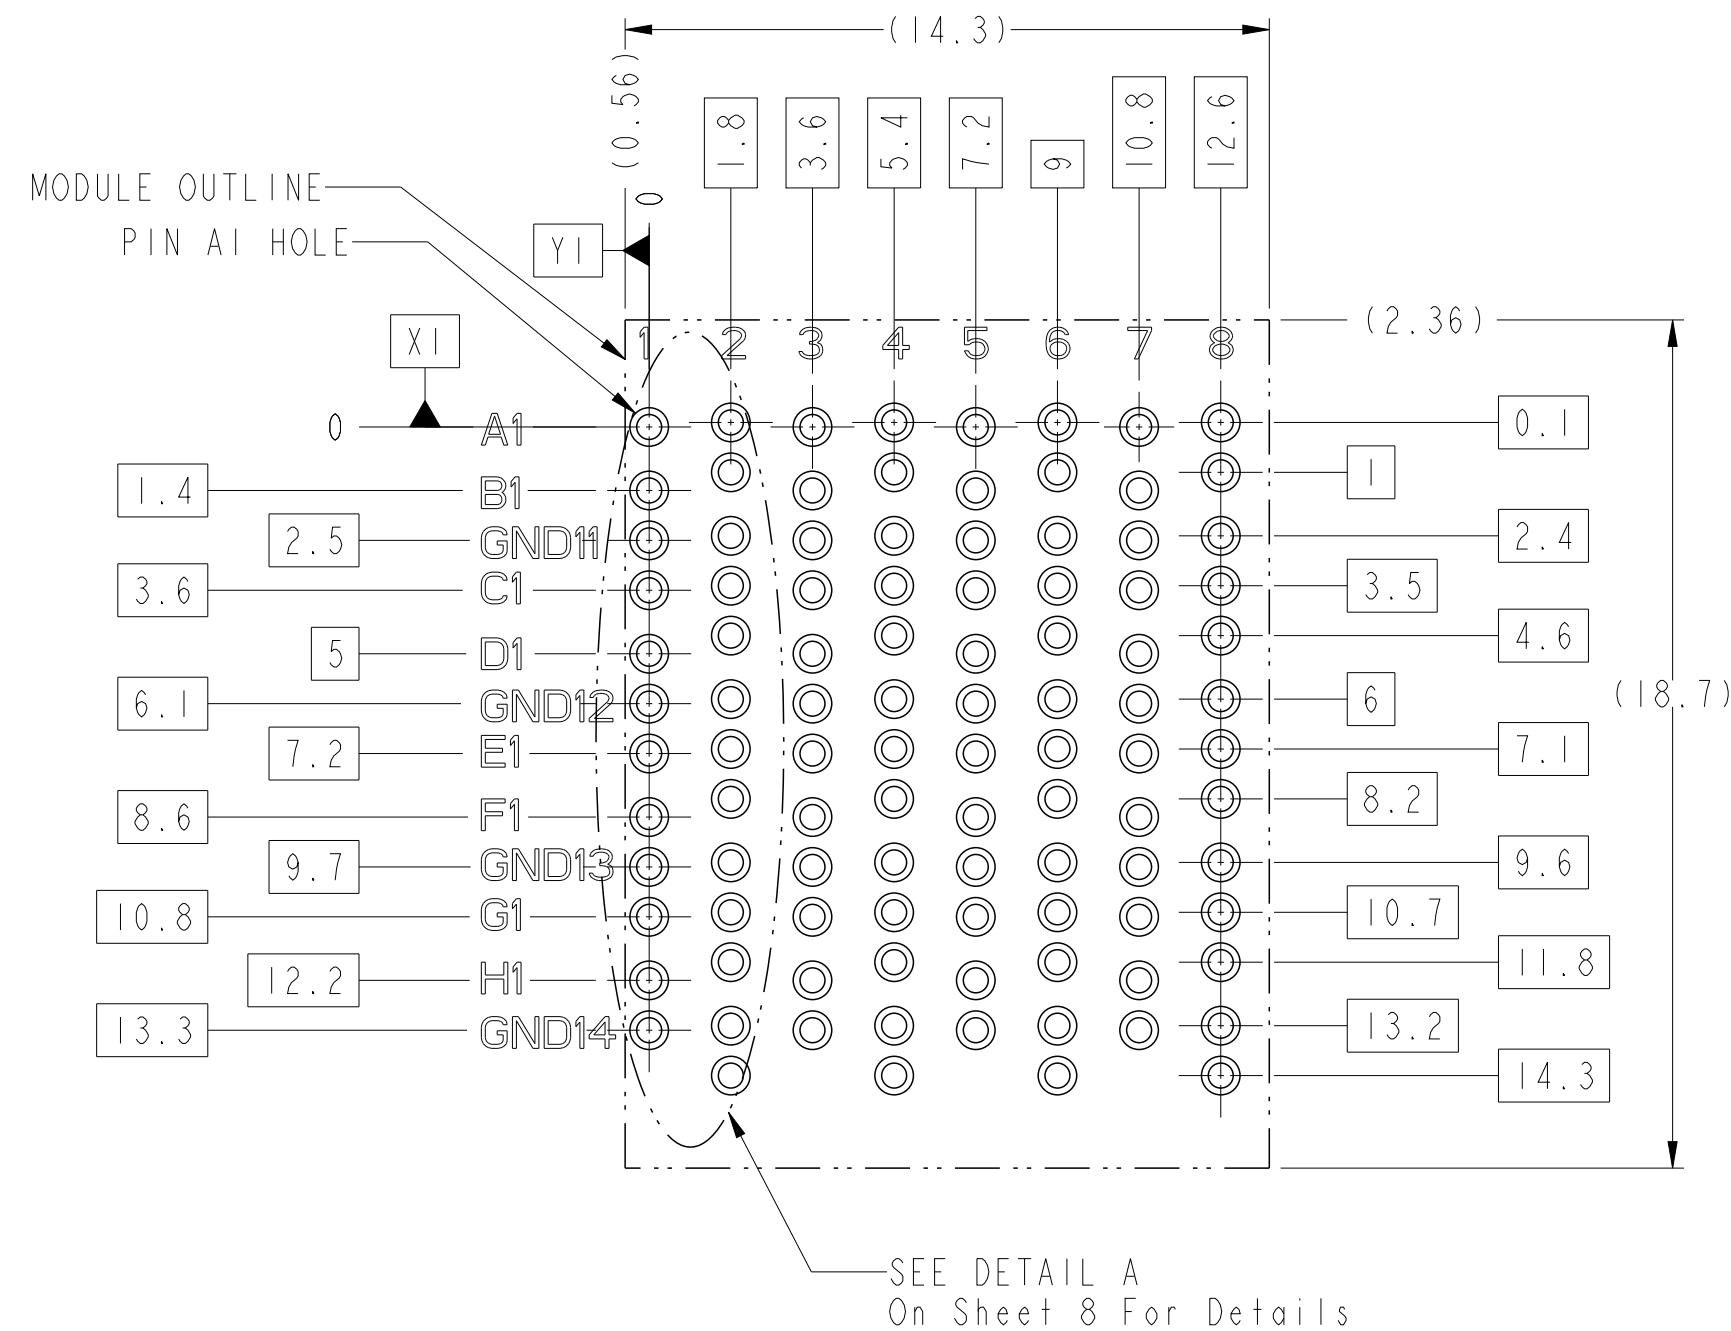
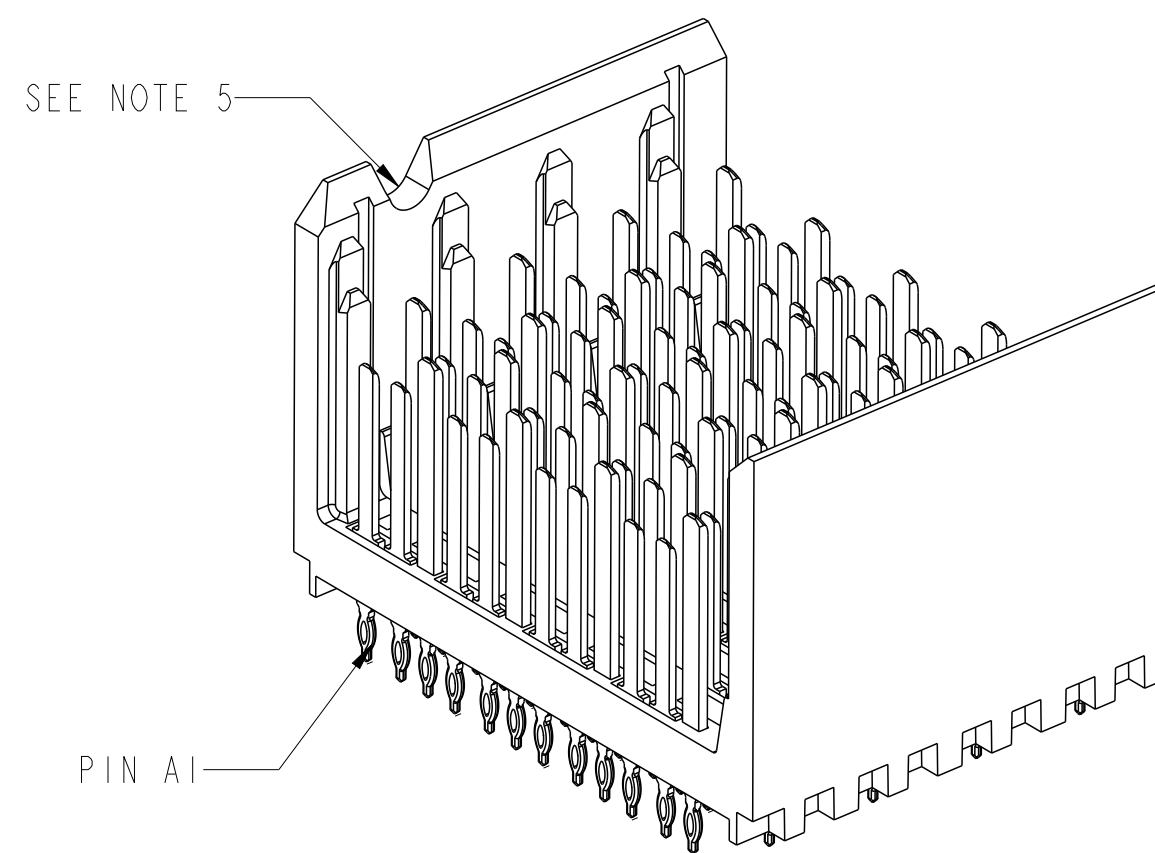
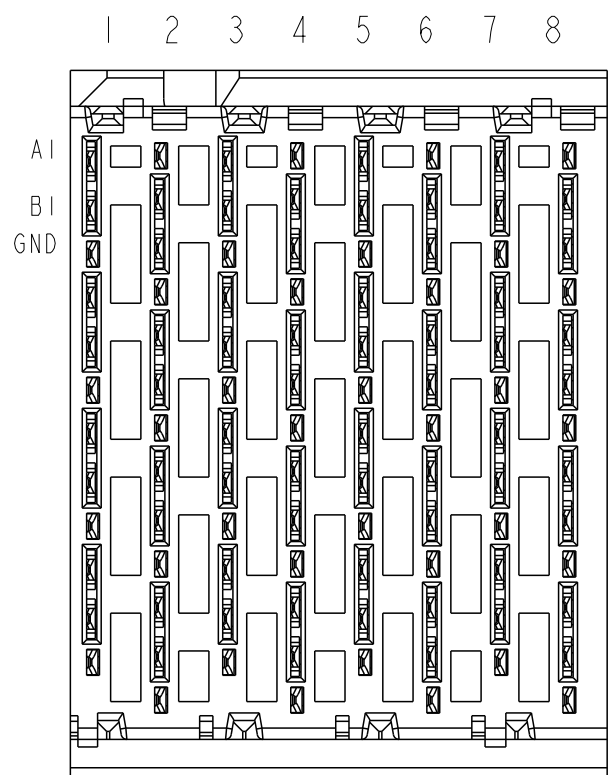
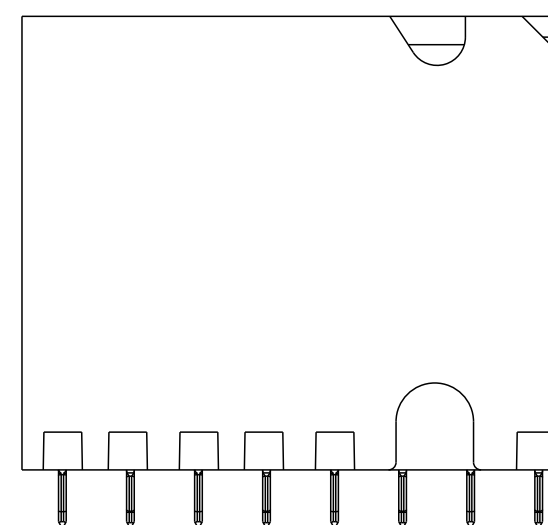


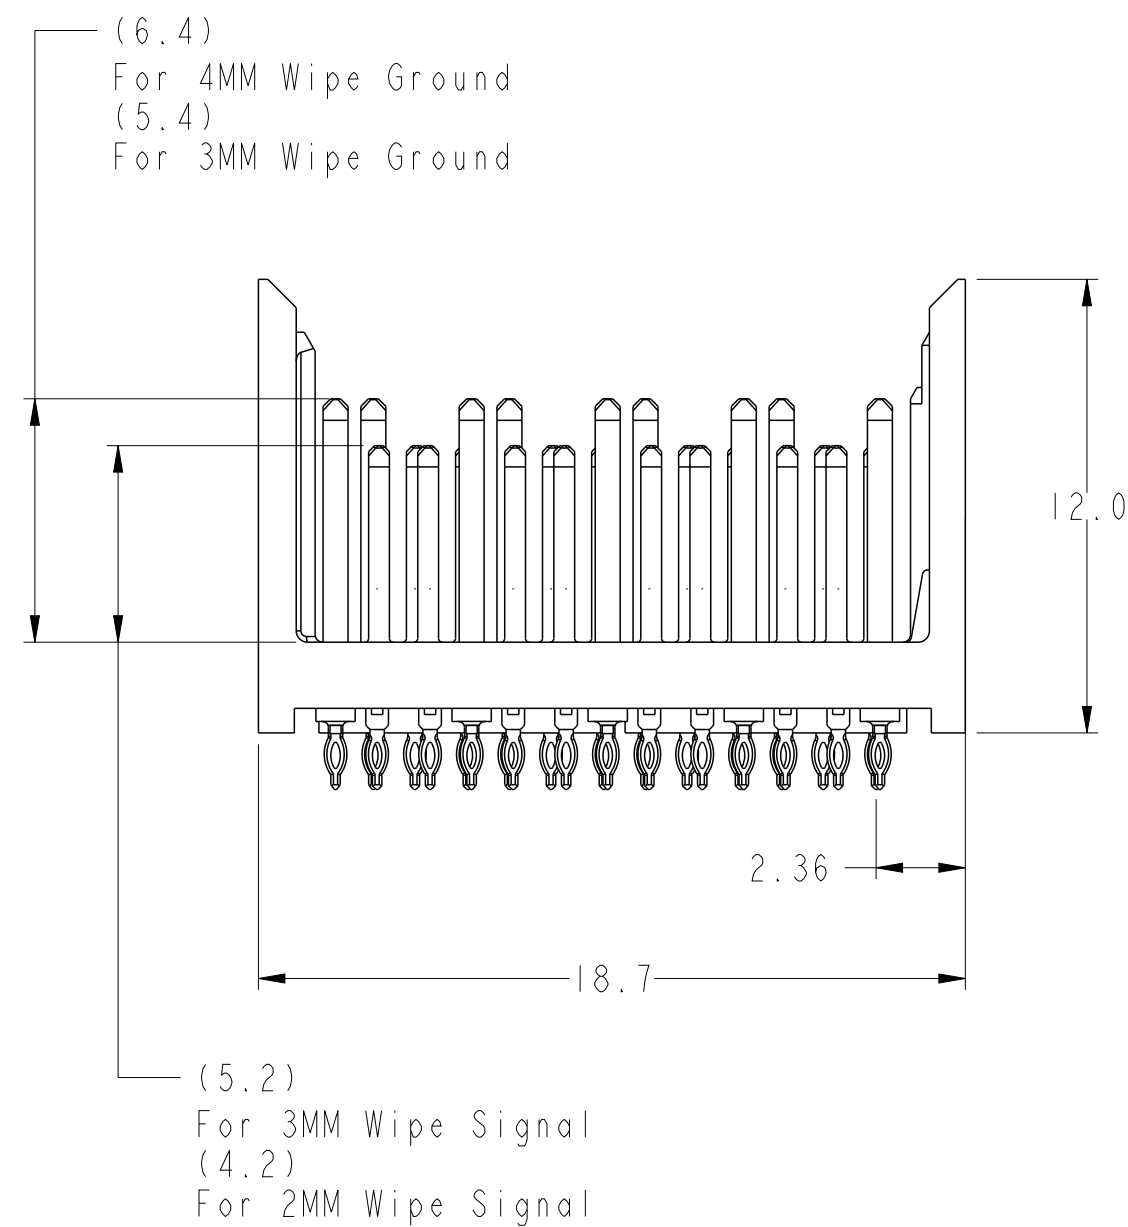

OPEN WALL MODULE

BP HOLE PATTERN COMPONENT SIDE
OPEN WALL MODULE BACKPLANE FOOTPRINT

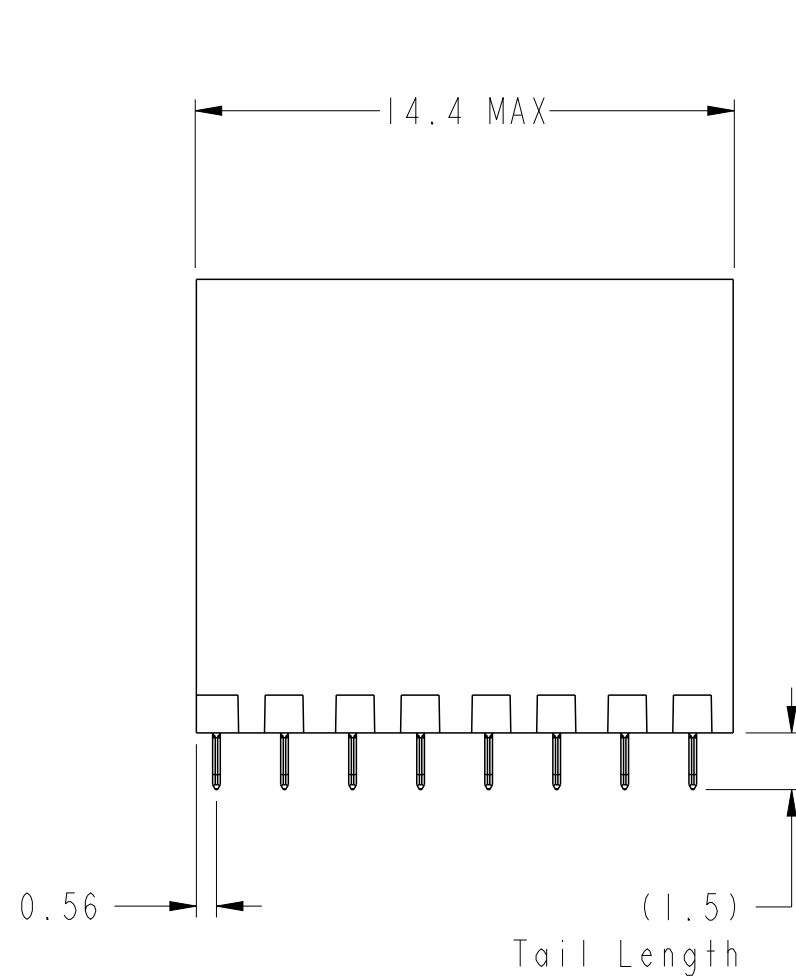


spec ref	-	dr	Collins Lu	2011/07/27	projection	mm	size	A2	scale	1:1
tolerance std	ISO 406 ISO 1101	eng	Sandar Soe	2016/03/07	chr	-	ecn no	ELX-S-17624-1	rel level	Released
surface	ISO 1302	linear	0.X ±0.3 0.XX ±0.10 0.XXX ±0.05	angular	0° ±2°	Amphenol FCI	title	MODULE ASSEMBLY, XCEDE HD Veritcal Header, 4 Pair 8 Column	cat. no.	Product - Customer Drw
										sheet 2 of 8






PDS: Rev :E

STATUS:Released

Printed: Mar 17, 2016

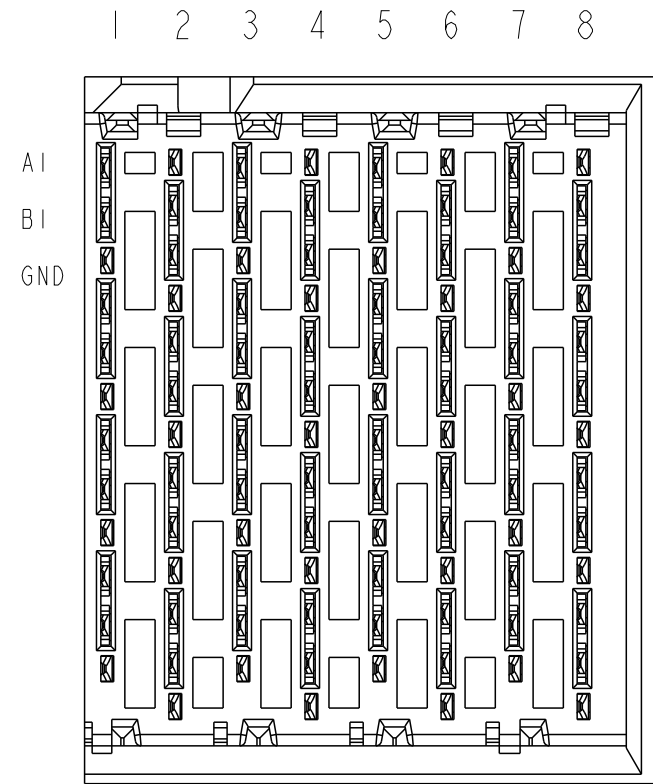




RIGHT WALL MODULE

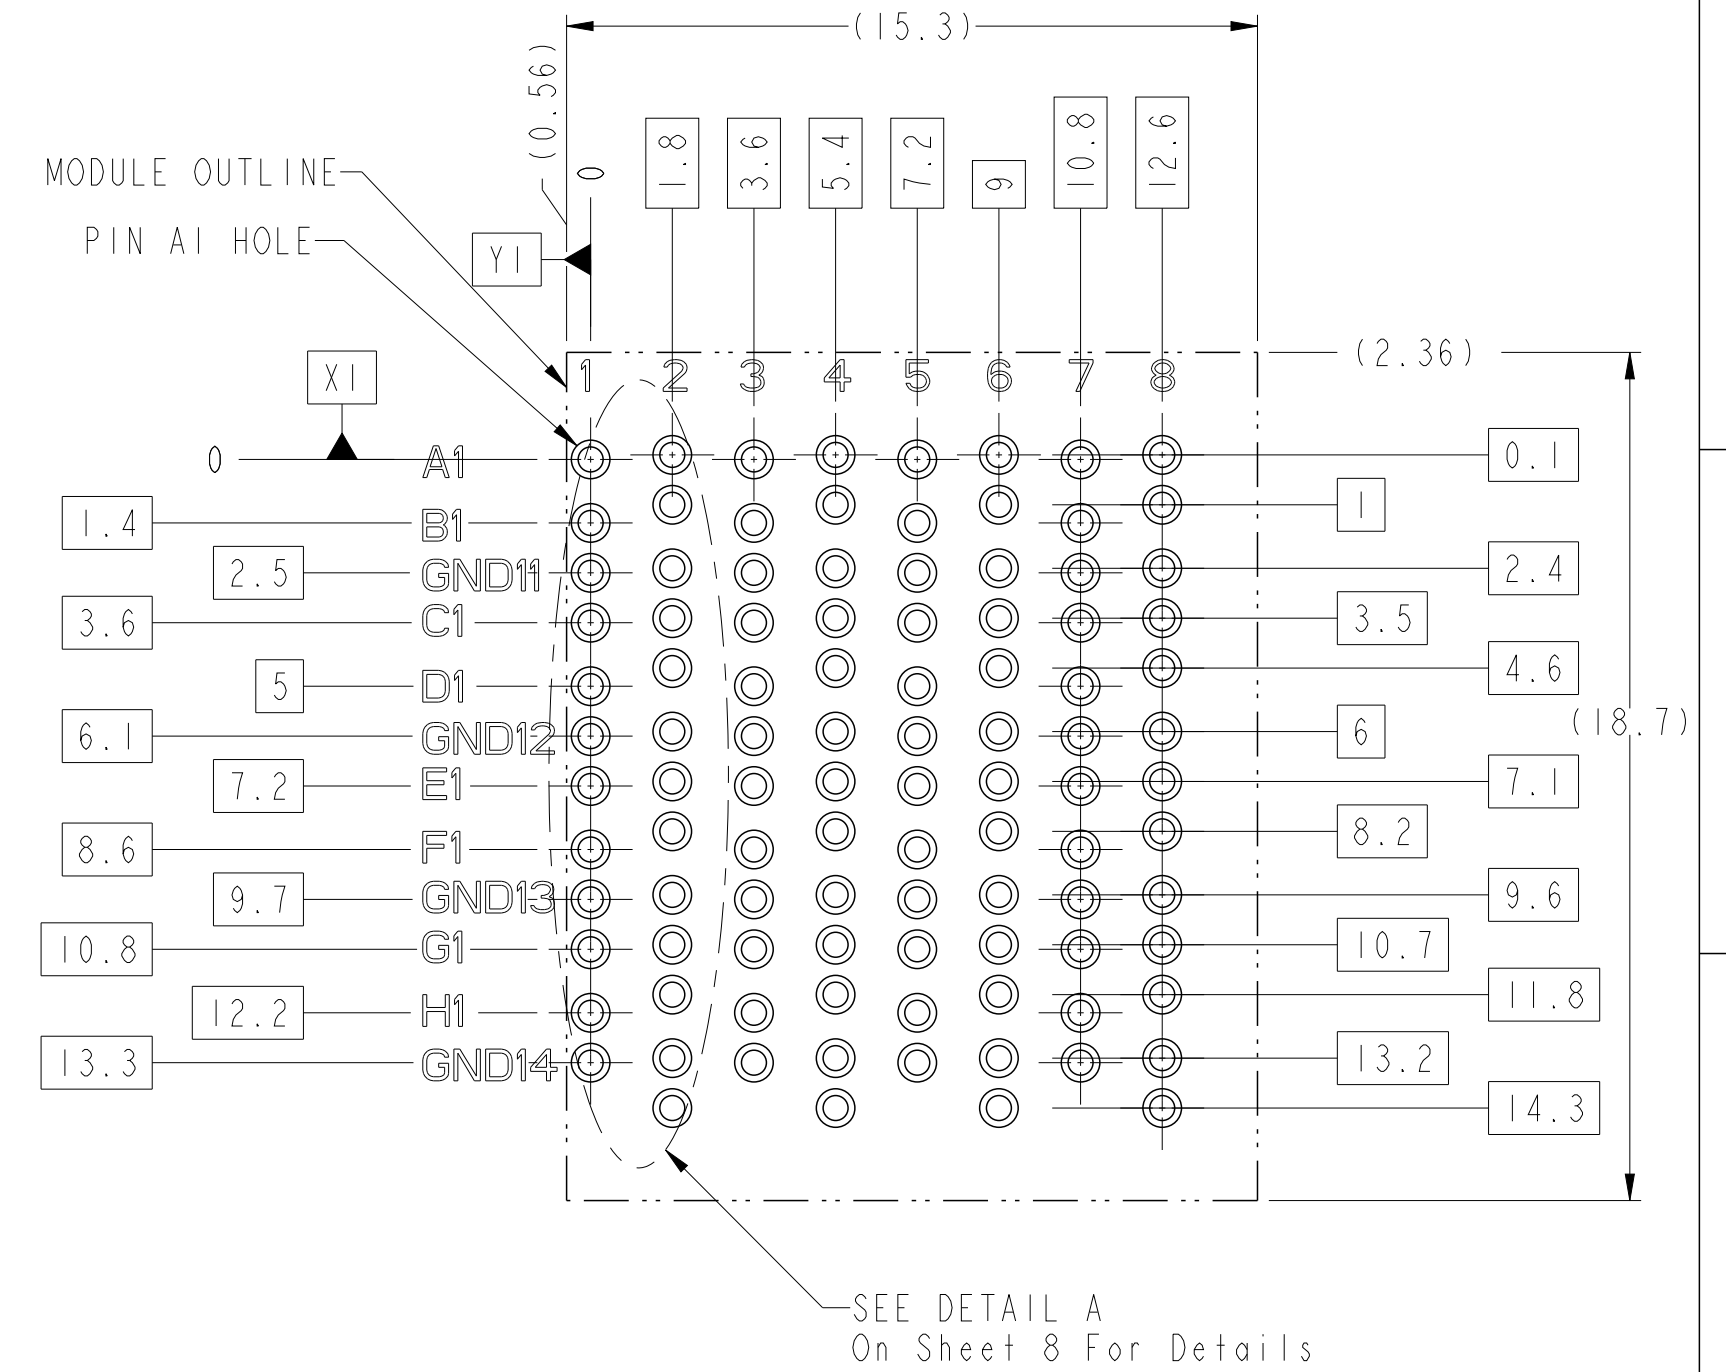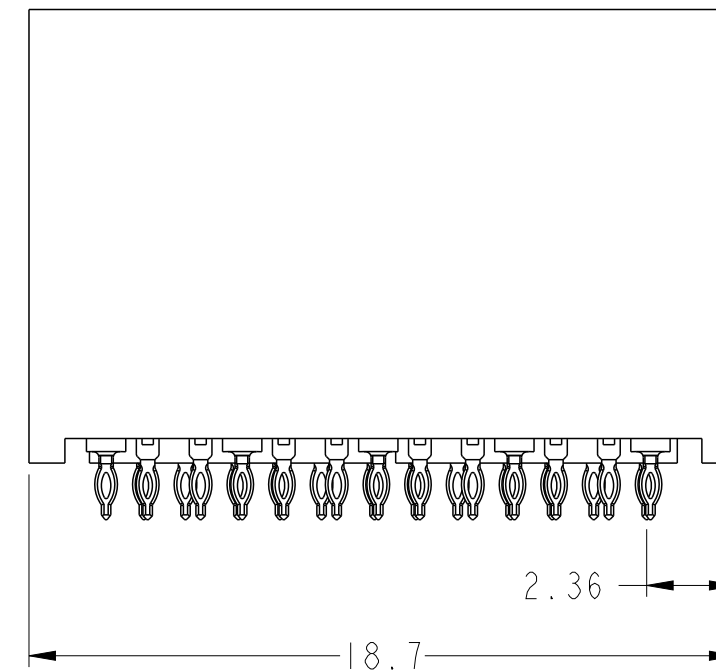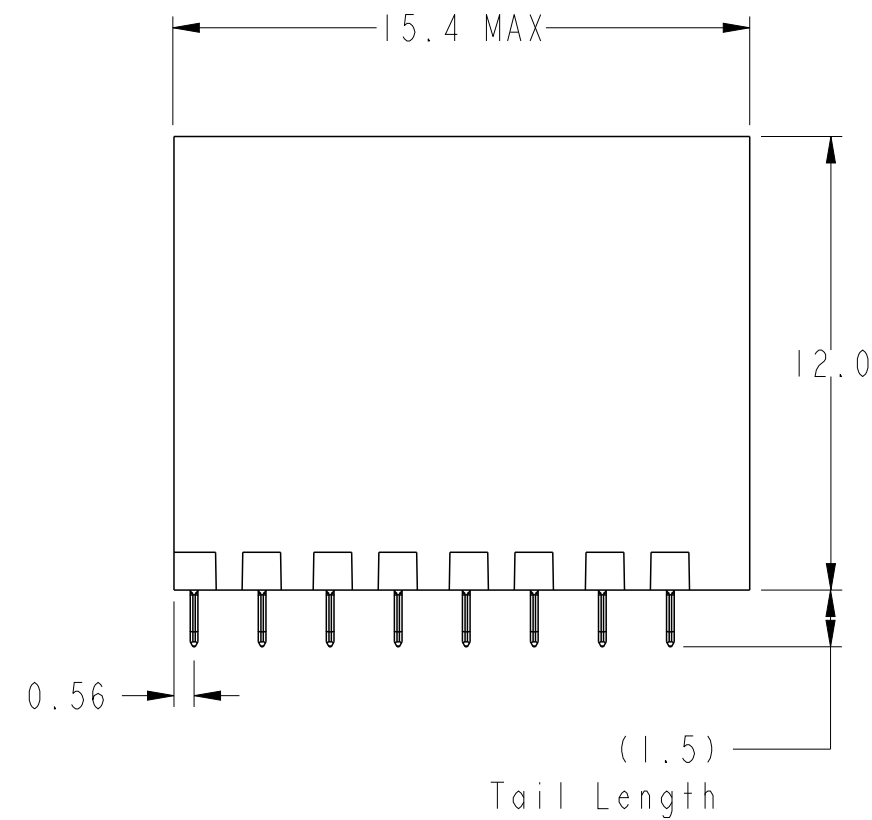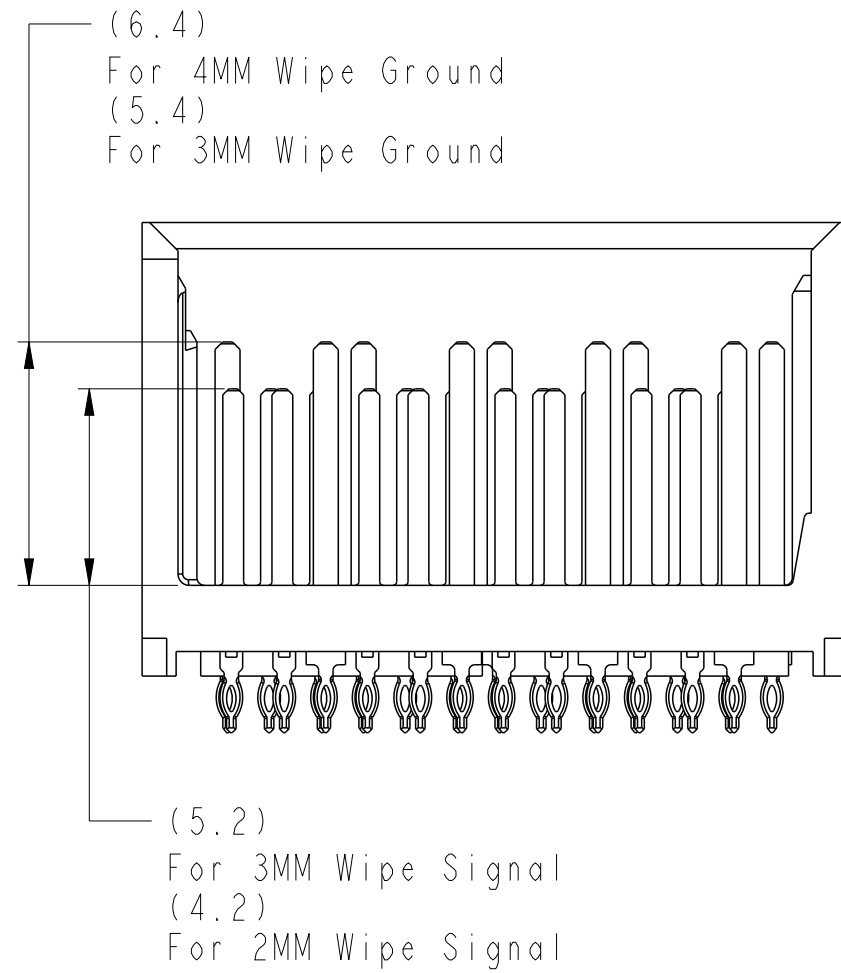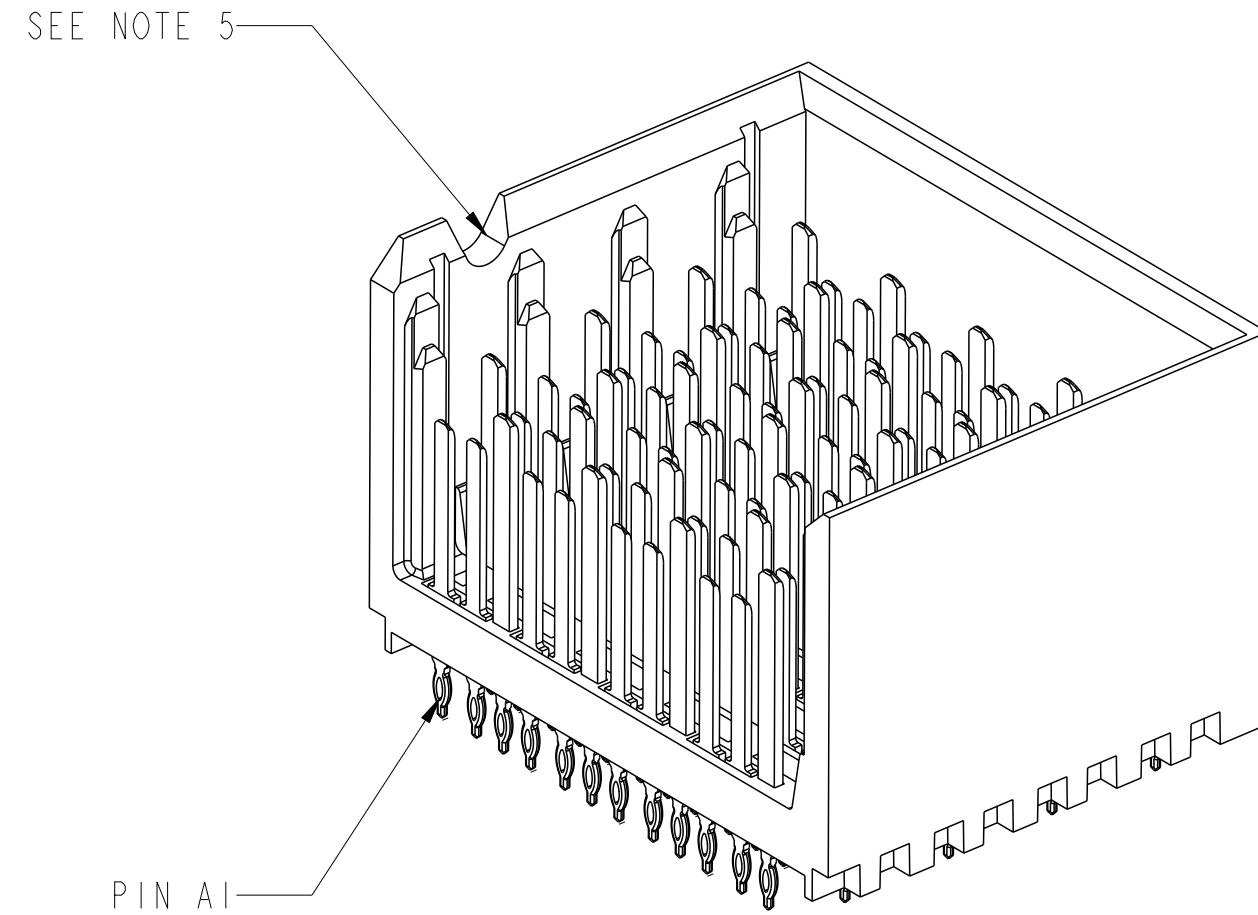

BP HOLE PATTERN COMPONENT SIDE




RIGHT WALL MODULE BACKPLANE FOOTPRINT

spec ref	-	dr	Collins Lu	2011/07/27	projection	mm	size	A2	scale	1:1
tolerance std	ISO 406 ISO 1101	eng	Sandar Soe	2016/03/07	chr	-	ecn no	ELX-S-17624-1	rel level	Released
surface	ISO 1302	appr	Chen-Hong Tan	2016/03/17	product family	-	cat. no.	-	Product - Customer Drw	sheet 4 of 8
linear	0.X ±0.3 0.XX ±0.10 0.XXX ±0.05	angular	0° ±2°	Amphenol FCi www.fci.com	title	MODULE ASSEMBLY, XCEDE HD Veritcal Header, 4 Pair 8 Column	dwg no	10115091	rev	E

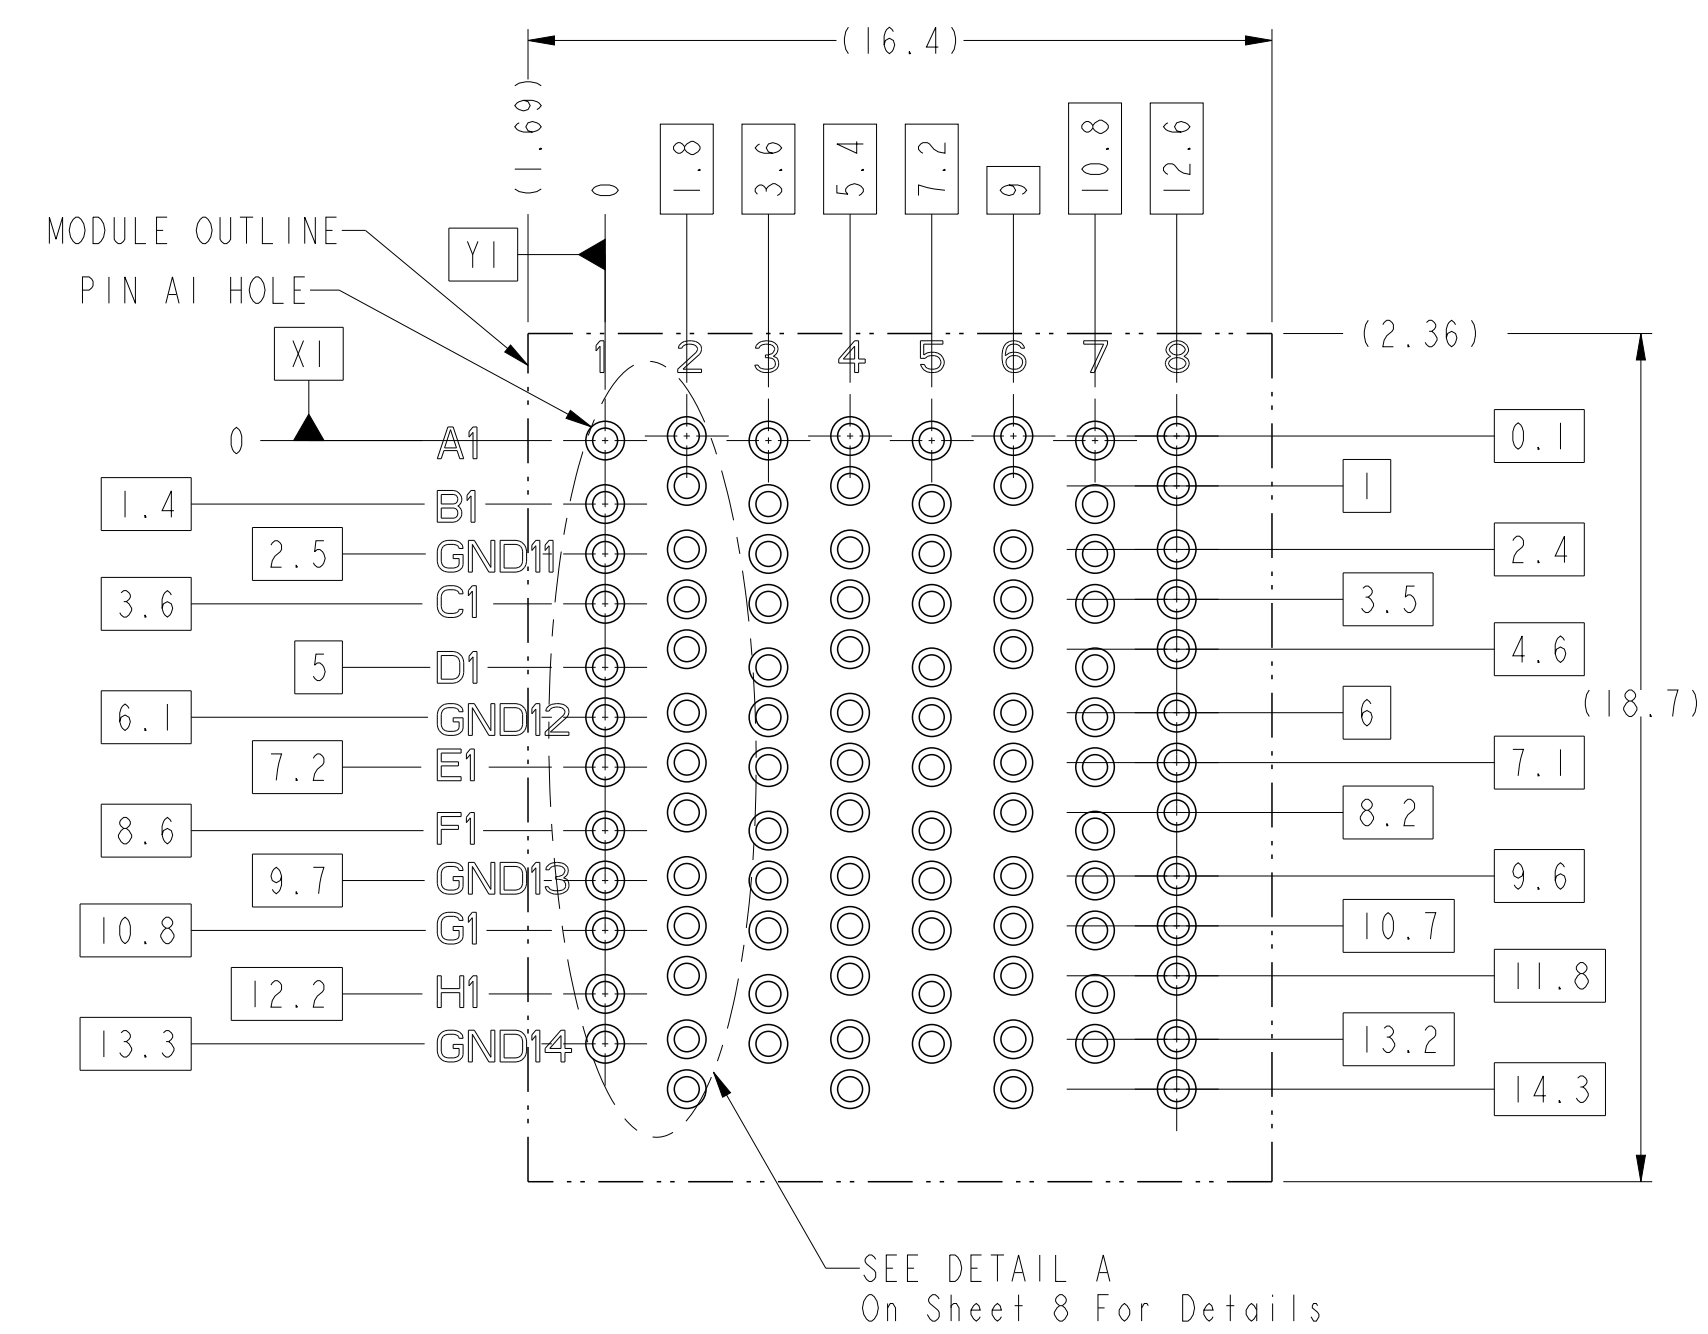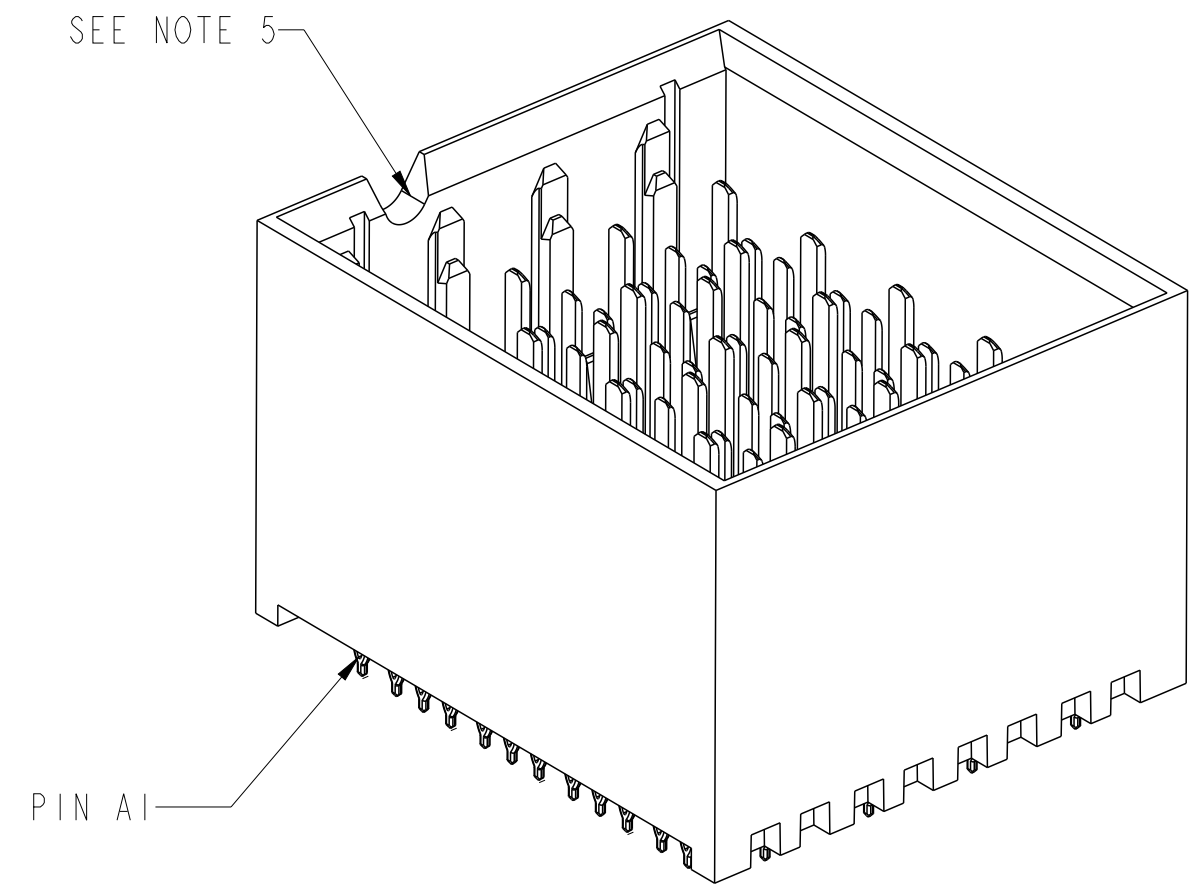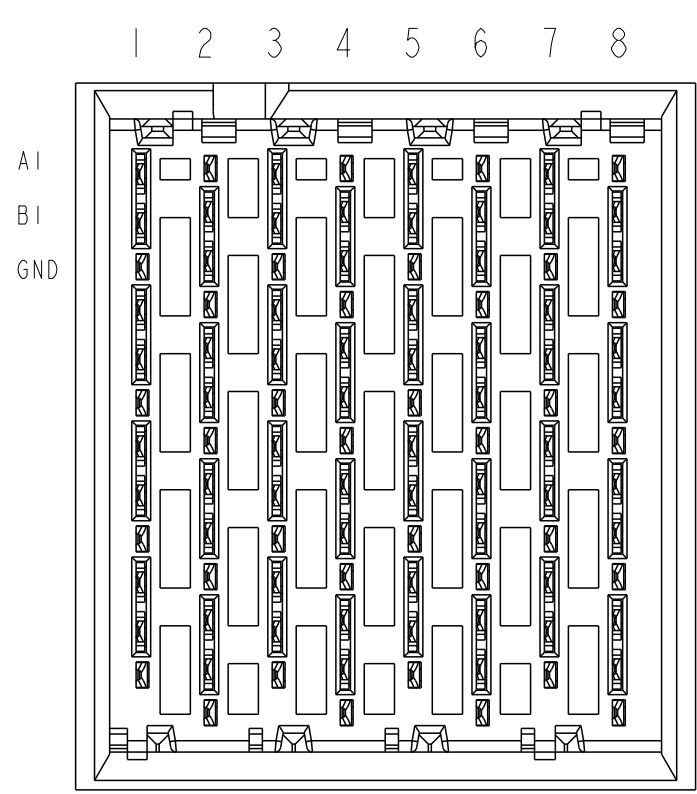

FOUR WALL MODULE

FOUR WALL MODULE BACKPLANE FOOTPRINT

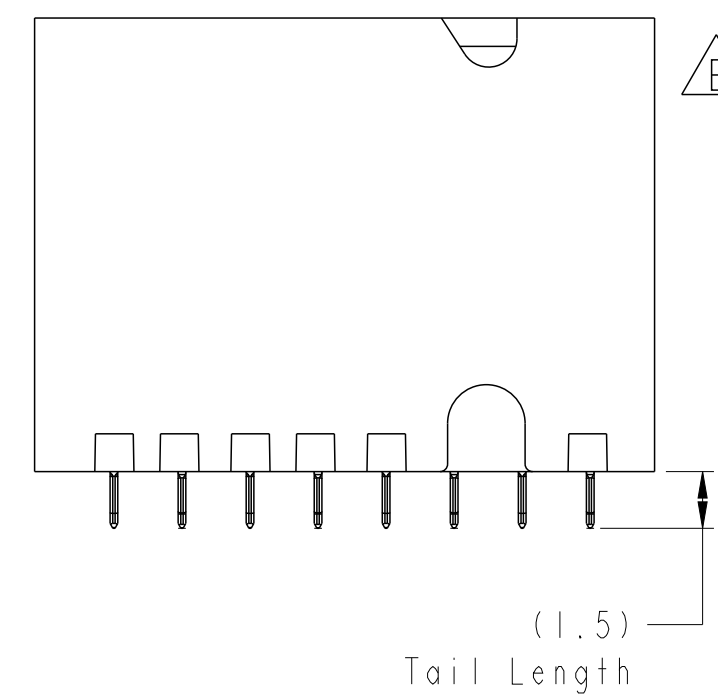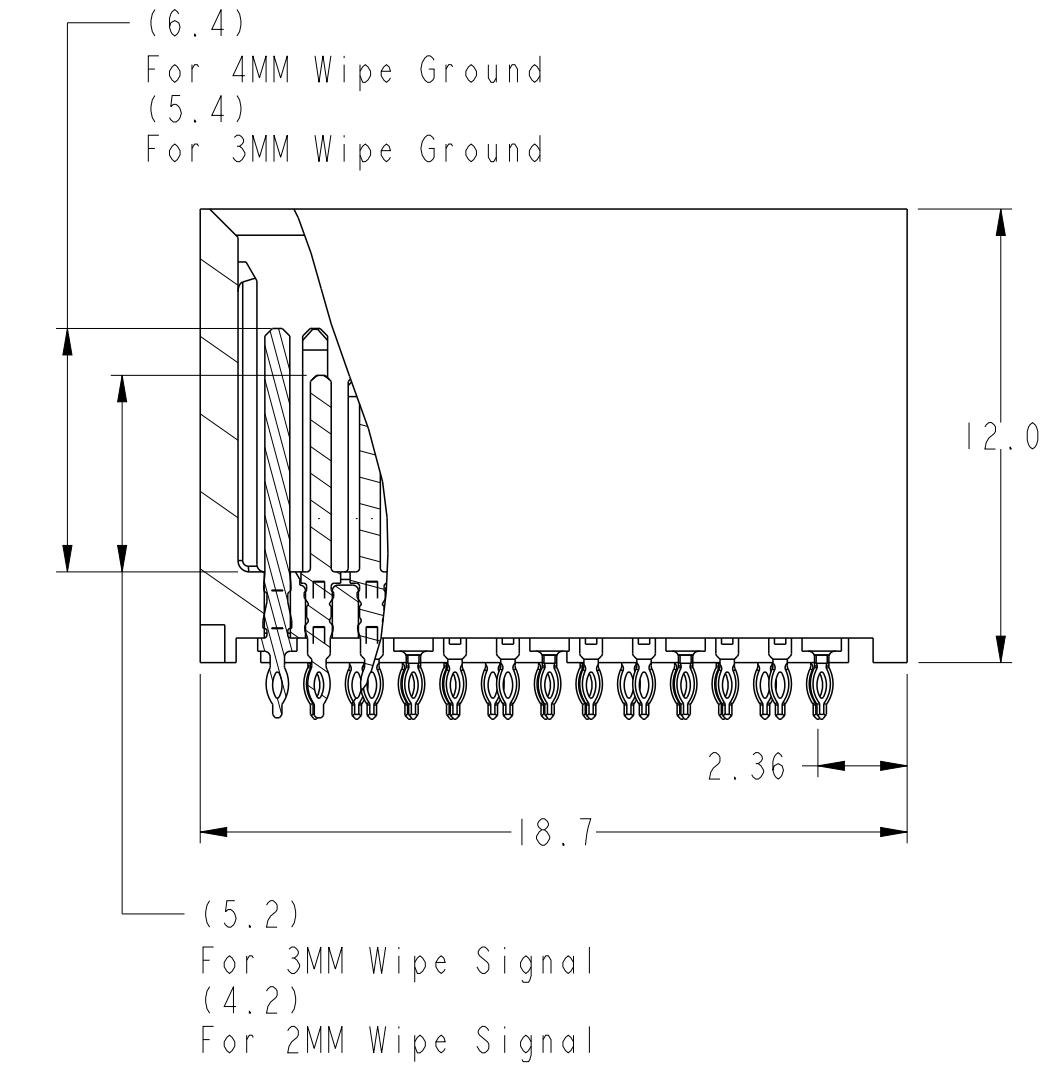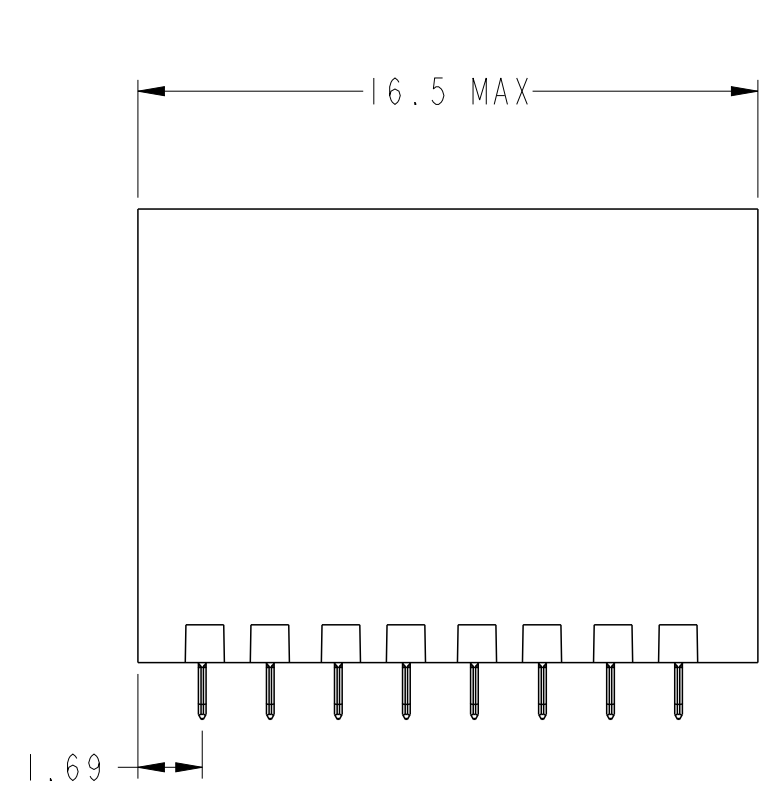

BP HOLE PATTERN COMPONENT SIDE

spec ref	-	dr	Collins Lu	2011/07/27	projection	mm	size	A2	scale	1:1
tolerance std	ISO 406 ISO 1101	eng	Sandar Soe	2016/03/07	chr	-	ecn no	ELX-S-17624-1	rel level	Released
surface	ISO 1302	appr	Chen-Hong Tan	2016/03/17	product family	-	cat. no.	-	Product - Customer Drw	sheet 5 of 8
linear	0.X ±0.3 0.XX ±0.10 0.XXX ±0.05	Amphenol FCI	title	MODULE ASSEMBLY, XCEDE HD Veritcal Header, 4 Pair 8 Column	dwg no	10115091	rev	E		
angular	0° ±2°	www.fci.com								

LEFT POLARIZING/GUIDE MODULE

Optional Key See Sheet 1
Part Number Tree

SEE NOTE 5

SEE NOTE 11 & TABLE 1

PIN A1 HOLE

MODULE OUTLINE

Y1

A1

B1

GND11

C1

D1

GND12

E1

F1

GND13

G1

H1

GND14

SEE DETAIL A
OnSheet 8 For Details

BP HOLE PATTERN COMPONENT SIDE

LEFT POLARIZING GUIDE MODULE
BACKPLANE FOOTPRINT

28.5±0.3

(1.5)
Tail Length

(5.2)
For 3MM Wipe Signal
(4.2)
For 2MM Wipe Signal
(6.4)
For 4MM Wipe Ground
(5.4)
For 3MM Wipe Ground

spec ref		-		dr	Collins Lu	2011/07/27	projection		mm		size	scale
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Sandar Soe	2016/03/07	ecn no	ELX-S-17624-1					1:1	
		chr	-	-	rel level	Released						
ISO 406		appr	Chen-Hong Tan	2016/03/17	product family		-					
ISO 1101												
surface		linear	0.X	±0.3	Amphenol FCi	title	MODULE ASSEMBLY, XCEDE HD	dwg no	10115091	rev	E	
			0.XX	±0.10								
			0.XXX	±0.05								
		angular	0°	±2°								
ISO 1302					www.fci.com	cat. no.	-	Product - Customer Drw		sheet 6 of 8		

PDS: Rev :E

STATUS:Released

Printed: Mar 17, 2016

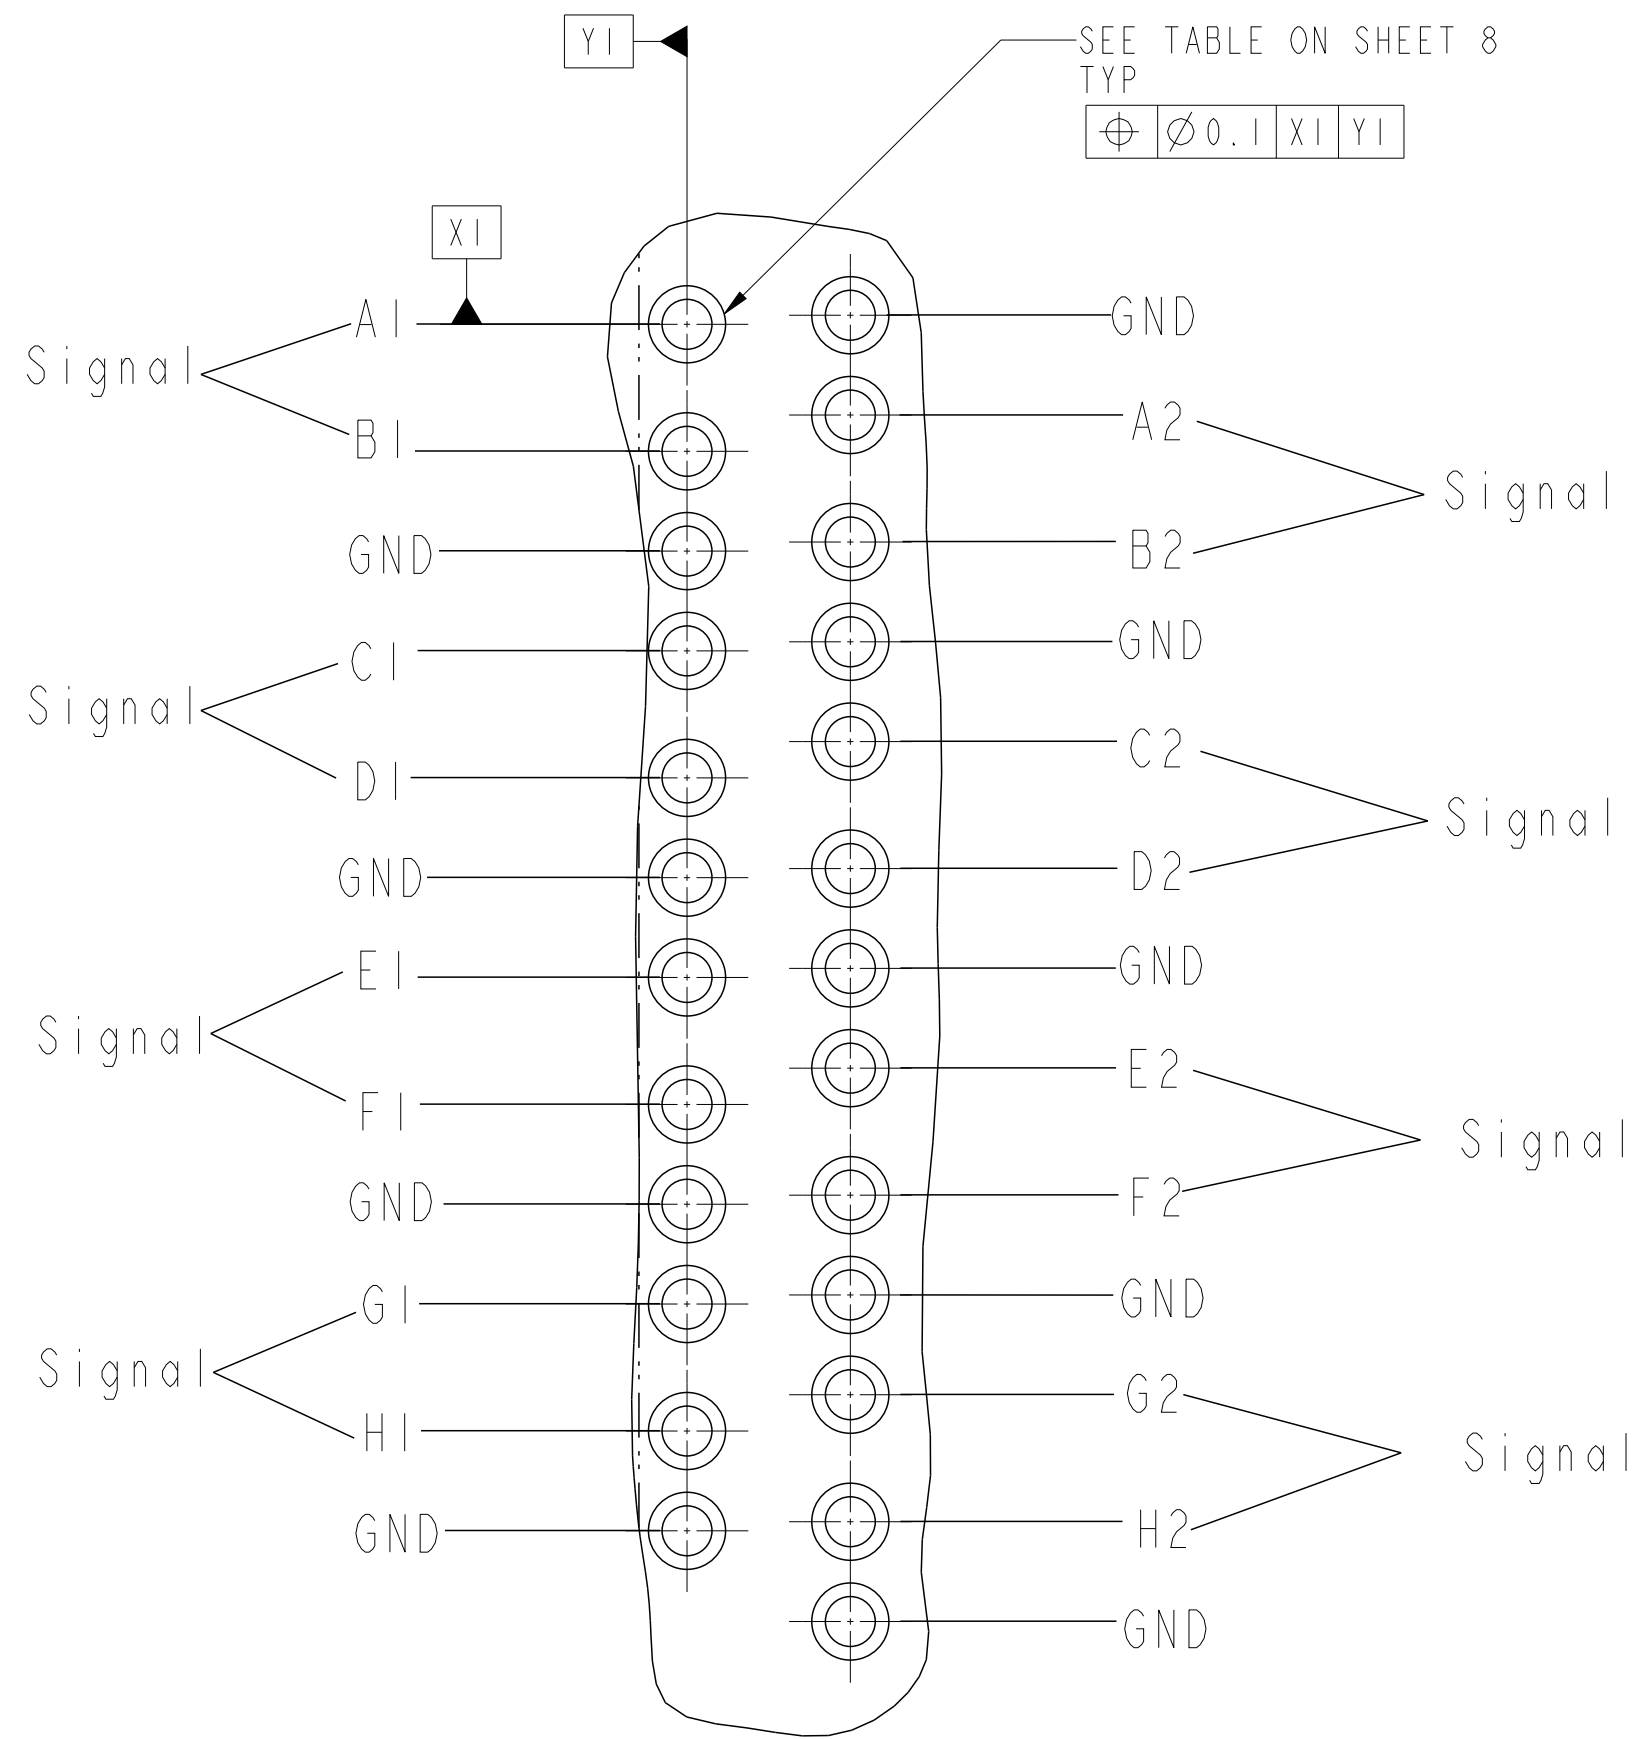


TABLE 3		
	COMPLIANT PIN DRILL $\varnothing 0.55[0.0217"]$	COMPLIANT PIN DRILL $\varnothing 0.45[0.0177"]$
PTH	$\varnothing 0.45\pm 0.05$	$\varnothing 0.36\pm 0.05$
DRILL	$\varnothing 0.55 [0.0217"]$	$\varnothing 0.45 [0.0177"]$
PAD	$\varnothing 0.85$	$\varnothing 0.75$

NOTES:

- CONNECTOR MATERIALS
SHROUD : HIGH-TEMP POLYMER, COLOR : BLACK, UL94V-0
CONTACTS : HIGH PREFORMANCE COPPER ALLOY
- PRODUCT SPECIFICATION : GS-12-0936
- APPLICATION SPECIFICATION : GS-20-0348
- PRODUCT MARKING :
PART NUMBER (10115091-XOE-XXXLF)
"FCI" AND DATE CODE (FCI P#####)
- NOTCH DESIGNATES "ROW A" SIDE OF CONNECTOR. NOTCH FEATURE ON OPPOSITE FOR PRODUCT MARKING.
- PLATING THICKNESS OF SIGNAL & GROUND CONTACT ARE DETERMINED BY PLATING CODE, REFER TO P/N TREE ON SHEET 1.
- PACKAGING MEETS GS-14-920 LEAD-FREE LABELING SPECIFICATION.
- GUIDE-PIN STYLE DESIGNATION ONLY APPLIES TO MODULE VERSIONS THAT REQUIRE GUIDE-PIN HARDWARE. FOR ALL NON-GUIDE-PIN VERSIONS, THE DEFAULT DASH-NUMBER DIGIT IN THAT LOCATION IS STILL '0'.
- SEE APPLICATION SPECIFICATION FOR ROUTING GUIDELINES, ADDITIONAL PTH GUIDELINES, MATED DIMENSIONS, GUIDE PIN SELECTION, ETC.
- A $\triangle$ SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW OR NOTE THAT HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.
- OPTIONAL HOLE LOCATION FOR GROUNDED PIN OR ADDITIONAL GUIDE-PIN SUPPORT. SEE TABLE 1 SHEET 1 FOR ADDITIONAL DETAILS.
- SCREW IS OPTIONAL AND ENGAGES WITH BOTTOM OF GUIDE PIN FROM BENEATH THE PCB FOR ADDITIONAL GUIDE-PIN SUPPORT.

spec ref -				dr Collins Lu		2011/07/27		projection		mm		size A2		scale 1:1	
tolerance std				eng Sandar Soe		2016/03/07						ecn no		ELX-S-17624-1	
ISO 406 ISO 1101				TOLERANCES UNLESS OTHERWISE SPECIFIED		chr -						rel level		Released	
				appr Chen-Hong Tan		2016/03/17		product family							
surface  ISO 1302		linear		0.X ±0.3		Amphenol FCI		title MODULE ASSEMBLY, XCEDE HD Veritical Header, 4 Pair 8 Column		dwg no 10115091		rev E			
		0.XX ±0.10													
		0.XXX ±0.05													
		angular 0° ±2°													
				www.fci.com		cat. no. -		Product - Customer Drw		sheet 8 of 8					

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru