
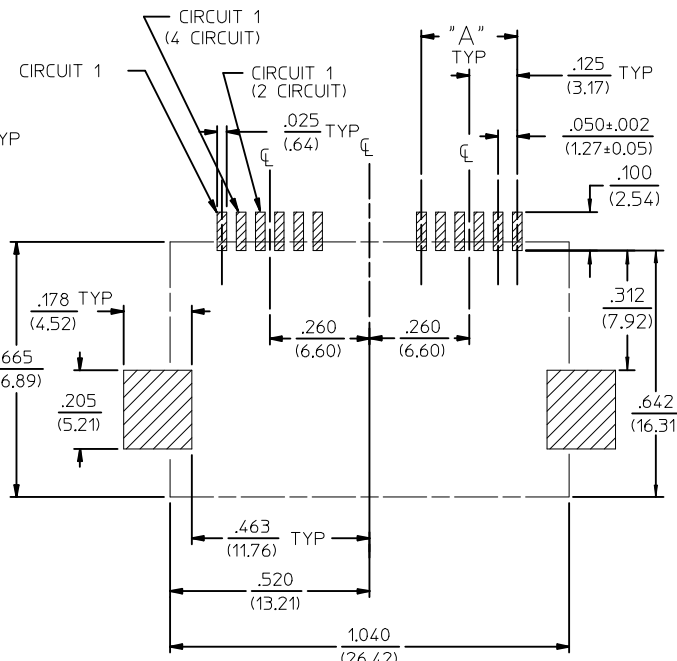
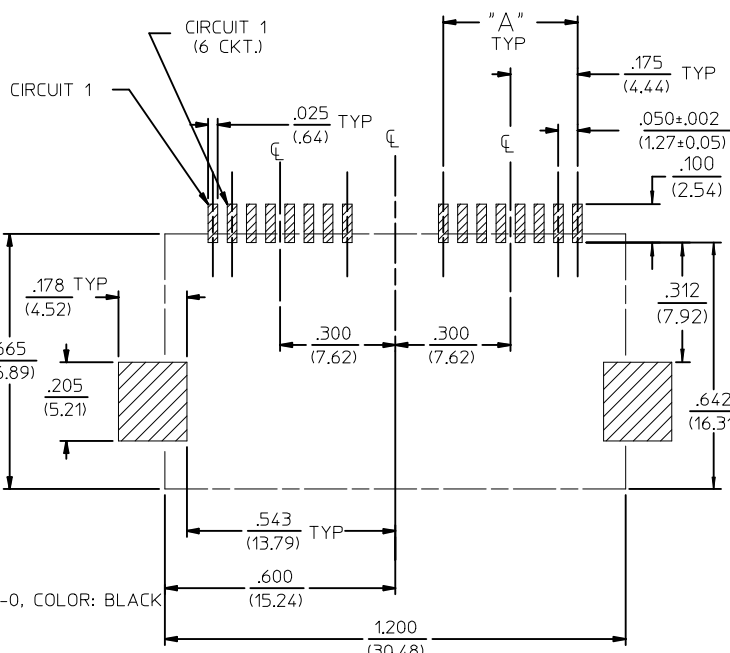
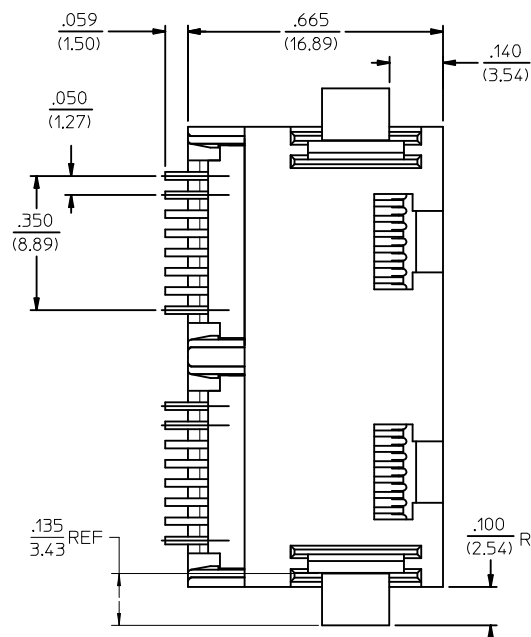
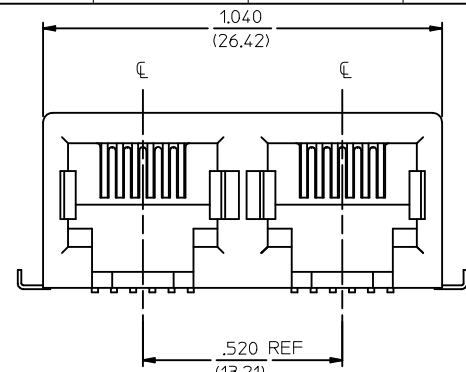
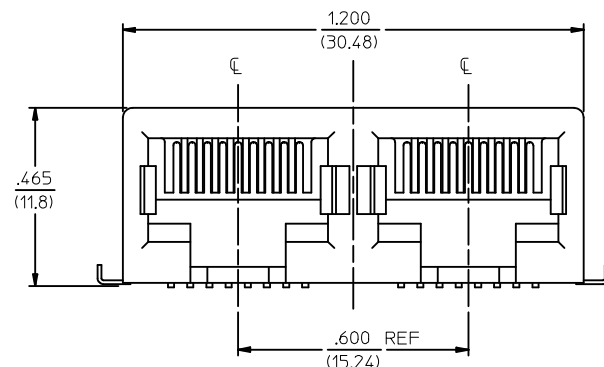


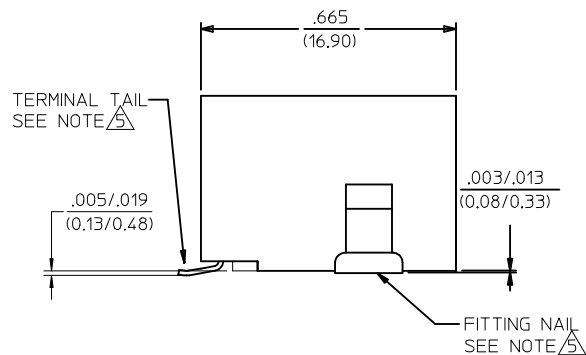

- NOTES:
- 1) MATERIAL:
HOUSING & INSULATOR: NYLON(PA), GLASS FILLED, UL94V-0, COLOR: BLACK
TERMINALS: PHOSPHOR BRONZE, .012/(0.30) THICK
FITTING NAILS: BRASS, .010/(0.25) THICK
 - 2) FINISH:
TERMINALS:
A = SELECT GOLD IN CONTACT AREA: .000050/(0.00127) MIN.,
SELECT MATTE TIN IN PC TAIL AREA: .000100/(0.00254) MIN.,
WITH OVERALL NICKEL UNDERPLATE: .000050/(0.00127) MIN.
B = SELECT GOLD IN CONTACT AREA: .000030/(0.00076) MIN.,
SELECT MATTE TIN IN PC TAIL AREA: .000100/(0.00254) MIN.,
WITH OVERALL NICKEL UNDERPLATE: .000050/(0.00127) MIN.
C = SELECT GOLD IN CONTACT AREA: .000015/(0.00038) MIN.,
SELECT MATTE TIN IN PC TAIL AREA: .000100/(0.00254) MIN.,
WITH OVERALL NICKEL UNDERPLATE: .000050/(0.00127) MIN.
 - 3) FITTING NAILS:
100 MICROINCHES MATTE TIN OVER 50 MICROINCHES NICKEL UNDERPLATE
 - 4) PRODUCT SPECIFICATION AND PROCESSING PARAMETERS: PS-43743-0001.
 - 5) PACKAGING SPECIFICATION:
CONNECTOR ASSEMBLIES TO BE PACKAGED USING TAPE & REEL SYSTEM.
 - 6) COPLANARITY SPECIFICATION:
WHEN AN ASSEMBLY IS PLACED UPON A LEVEL SURFACE, THE MAXIMUM GAP BETWEEN THE LEVEL SURFACE AND ALL TERMINAL TAILS AND BOTH FITTING NAILS IS .006/(0.15).
 - 7) FOR ASSEMBLIES HAVING VOIDED CIRCUITS, THE TAIL PORTION IS CUT AND REMOVED, THE MATING PORTION OF THE TERMINAL REMAINS INTACT. VOIDED CIRCUITS MUST BE THE SAME FOR BOTH PARTS.
 - 8) CONFORMS TO FCC REGULATION PART 68.5 FOR MODULAR JACKS.

PC BOARD LAYOUT FOR
8 POSITION HOUSING
(COMPONENT SIDE OF BOARD)

PC BOARD LAYOUT FOR
6 POSITION HOUSING
(COMPONENT SIDE OF BOARD)

CORRECT NOTE # EC NO: UCP2013-4879 DRWN:NGUYEN CHKD:JELL APPR:FSMITH REV: G4	2013/05/31 2013/05/31 2013/06/07	DESCRIPTION QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION
			mm	INCH	DRAWN BY PEARSON	DATE 01/07/97	TITLE 4, 6 & 8 CIRCUIT DUAL PORT SMT MODJACK molex DOCUMENT NO. SD-43841-001		
			4 PLACES ± ---	± ---	CHECKED BY MUELLER	DATE 01/07/97			
			3 PLACES ± ---	± .010	APPROVED BY FSMITH	DATE 2012/10/12			
			2 PLACES ± 0.25	± .015	SEE CHART				
			1 PLACE ± .38	± ---	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX. INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
			0 PLACE ± ---	± ---					
			ANGULAR ±1/2°						
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						

13

12

11

10

9

8

7

6

5

4

3

2

1

ASSEMBLY
ITEM NO.

CONNECTOR
SIZE

CIRCUIT
SIZE

TERMINAL
PLATING

TAPE & REEL
PACKAGING NO.

VOIDED
CIRCUITS

43841-0001

8

4

A

PK-70873-7004

NA

43841-0002

8

6

A

PK-70873-7004

43841-0003

8

8

A

PK-70873-7004

43841-0004

6

4

A

PK-70873-7003

43841-0005

6

6

A

PK-70873-7003

43841-0006

8

4

B

PK-70873-7004

43841-0007

8

6

B

PK-70873-7004

43841-0008

8

8

B

PK-70873-7004

43841-0009

6

4

B

PK-70873-7003

43841-0010

6

6

B

PK-70873-7003

43841-0011

8

4

C

PK-70873-7004

43841-0012

8

6

C

PK-70873-7004

43841-0013

8

8

C

PK-70873-7004

43841-0014

6

4

C

PK-70873-7003

43841-0015

6

6

C

PK-70873-7003

43841-0016

6

2

A

PK-70873-7003

43841-0017

6

2

B

PK-70873-7003

43841-0018

6

2

C

PK-70873-7003

NA

COVER TAPE

REEL

VACUUM FORMED CARRIER TAPE WITH SPROCKET HOLES

TAPE AND REEL PACKAGING

HOUSING
SIZE

CIRCUIT
SIZE

DIM. A

6

6

.250
(6.35)

6

4

.150
(3.81)

6

2

.050
(1.27)

8

8

.350
(8.89)

8

6

.250
(6.35)

8

4

.150
(3.81)

QUALITY
SYMBOLS

DESCRIPTION

REV

SEE SHEET ONE

EC NO: UCP2013-4879

DRWN:NGUYEN 2013/05/31

CHKD:JBELL 2013/05/31

APPR:FSMITH 2013/06/07

G4

GENERAL TOLERANCES
(UNLESS SPECIFIED)

mm

INCH

4 PLACES ± --- ± ---

3 PLACES ± --- ± .010

2 PLACES ± 0.25 ± .015

1 PLACE ± .38 ± ---

0 PLACE ± --- ± ---

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
IN/MM

DRAWN BY DATE

CHECKED BY DATE

APPROVED BY DATE

MATERIAL NO.

SEE CHART

SIZE C

SCALE
2:1

DESIGN UNITS
INCH

THIRD ANGLE
PROJECTION

TITLE

4, 6 & 8 CIRCUIT
DUAL PORT SMT MODJACK

molex

DOCUMENT NO.

SD-43841-001

SHEET NO.
2 OF 2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

VIEW SHOWING TYPICAL TERMINAL CUTOFF
OF TAIL (SEE NOTE 6) FOR VOIDED CIRCUITS.

TERMINAL CUTOFF POINT

TYPICAL VIEW SHOWING VOIDED CIRCUIT
(CIRCUITS 2,3,6,7 SHOWN VOIDED)

12

11

10

9

8

7

6

5

4

3

2

1

12

11

10

9

8

7

6

5

4

3

2

1

1b_frame_C_P_AM_T
Rev. G 2012/01/11

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru