

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
E	B		A1	REVISED PER ECO-11-005150	21MAR11	RK	HMR
			B	ECR-18-004497,Obsolete P/N	05APR18	TF	CW

NOTES:

1. ELECTRICAL DATA:
- CONTACT RESISTANCE:

INSULATION RESISTANCE:

CURRENT RATING:

BREAKDOWN VOLTAGE:
- 10 mOhm MAX

100 MOhm MIN at 500VDC

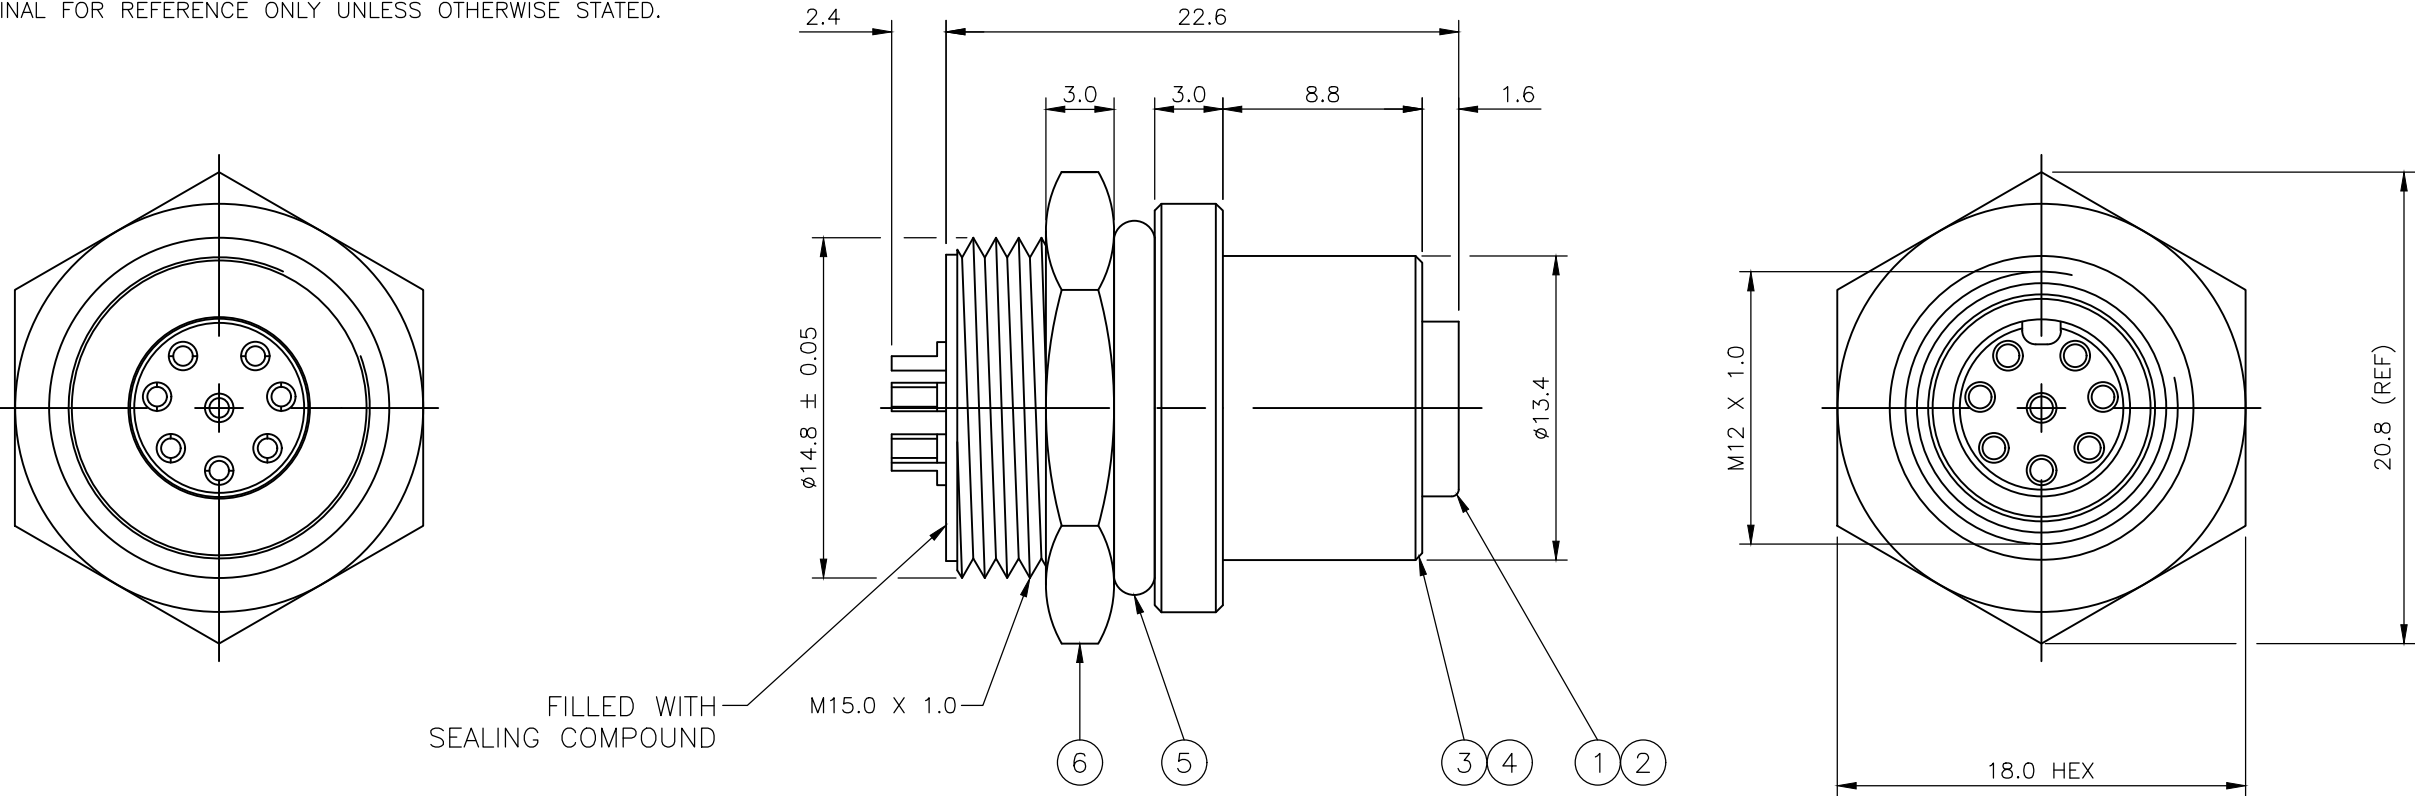
5 AMPS (FOR 3, 4 AND 5 POSITIONS) AND 2 AMPS (FOR 8 POSITION ONLY)

500 VAC MIN PER MINUTE
2. ENVIRONMENTAL:
- OPERATING TEMPERATURE:

SEALING REQUIREMENTS:
- 25°C TO +90°C

IP67
3. PROD SPEC:
- 108-3641
4. PACKAGING:
- 107-3334
5. FOR TECHNICAL DATA REFER TO YOUR LOCAL TE CONNECTIVITY SALES OFFICE.
6. ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED.

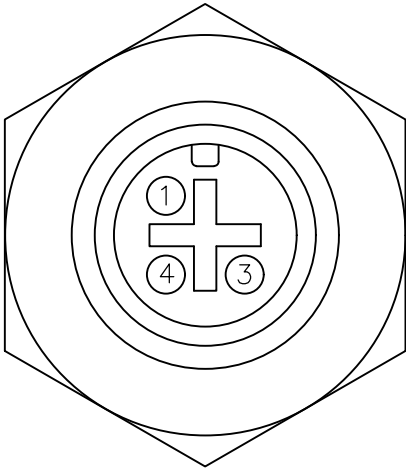
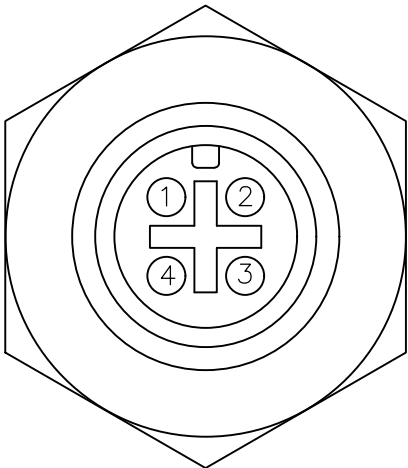
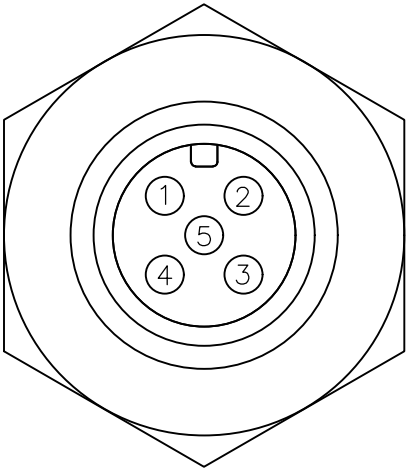
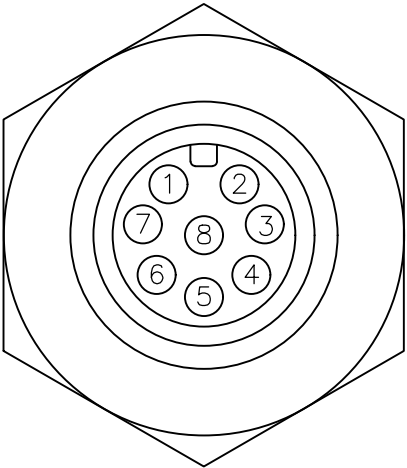




ITEM	DESCRIPTION	MATERIAL	FINISH/COLOUR	QUANTITY / ITEM			
				-1	-2	-3	-4
1	CONNECTOR HOUSING	GF NYLON	BLACK	1	1	1	1
2	SOCKET CONTACT	BRASS	0.15µm GOLD OVER NICKEL	3	4	5	8
3	CONNECTOR BODY	BRASS	NICKEL PLATED	1	1	1	1
4	'O' RING	VITON	GREEN	1	1	1	1
5	'O' RING	EPDM	BLACK	1	1	1	1
6	SCREW NUT	BRASS	2.5µm NICKEL PLATED	1	1	1	1




Obsolete	M12 METAL FEMALE PANEL MOUNT CONNECTOR, SOLDER, STRAIGHT, REAR (CIRCULAR) MOUNTING	8	1838415-4
	M12 METAL FEMALE PANEL MOUNT CONNECTOR, SOLDER, STRAIGHT, REAR (CIRCULAR) MOUNTING	5	1838415-3
	M12 METAL FEMALE PANEL MOUNT CONNECTOR, SOLDER, STRAIGHT, REAR (CIRCULAR) MOUNTING	4	1838415-2
	M12 METAL FEMALE PANEL MOUNT CONNECTOR, SOLDER, STRAIGHT, REAR (CIRCULAR) MOUNTING	3	1838415-1
DESCRIPTION		NO. OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A.Morey	09MAR06	TE Connectivity			
		CHK F.Wheeler-King	12APR06				
		APVD F.Wheeler-King	12APR06	NAME M12 METAL FEMALE PANEL MOUNT CONNECTOR, SOLDER, STRAIGHT, REAR(CIRCULAR) MOUNTING			
		PRODUCT SPEC					
		APPLICATION SPEC					
		WEIGHT		SIZE A3	CAGE CODE 00779	DRAWING NO C-1838415	RESTRICTED TO —
		CUSTOMER DRAWING		SCALE NTS	SHEET 1 OF 2	REV B	

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
E	B		—	SEE SHEET 1	—	—	—

1838415-1	1838415-2	1838415-3	1838415-4
PIN ASSIGNMENTS FRONT VIEW 	PIN ASSIGNMENTS FRONT VIEW 	PIN ASSIGNMENTS FRONT VIEW 	PIN ASSIGNMENTS FRONT VIEW 
RECOMMENDED PANEL CUT-OUT (MAX PANEL THICKNESS 4.4mm) 	RECOMMENDED PANEL CUT-OUT (MAX PANEL THICKNESS 4.4mm) 	RECOMMENDED PANEL CUT-OUT (MAX PANEL THICKNESS 4.4mm) 	RECOMMENDED PANEL CUT-OUT (MAX PANEL THICKNESS 4.4mm) 

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONS: mm  MATERIAL — TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± — FINISH —	DWN A.Morey 09MAR06 CHK F.Wheeler—King 12APR06 APVD F.Wheeler—King 12APR06 PRODUCT SPEC — APPLICATION SPEC — WEIGHT — CUSTOMER DRAWING		 TE Connectivity NAME M12 METAL FEMALE PANEL MOUNT CONNECTOR, SOLDER, STRAIGHT, REAR (CIRCULAR) MOUNTING SIZE A3 CAGE CODE 00779 DRAWING NO C=1838415 RESTRICTED TO —				
			SCALE NTS		SHEET 2 OF 2		REV B

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru