


# STATSHIELD® METAL-IN BOXED SERIES

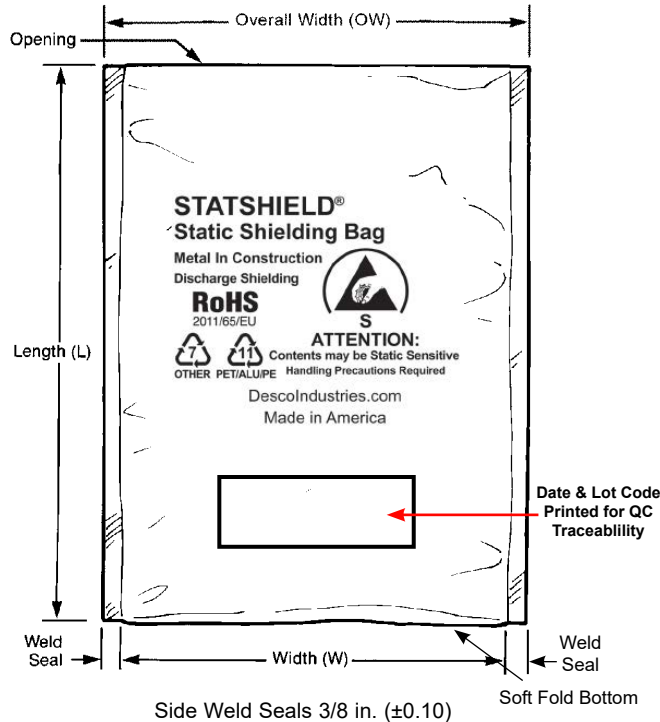

## Specifications:

### Standard Document

ANSI/ESD S541 (ANSI/ESD S20.20)  
ANSI/ESD S11.4

### Electrical Properties

#### Surface Resistance:

Outer Surface

Inner Surface

Discharge Shielding

Charge Generation

Capacitance Probe (to dissipate 1 KV)

### Typical Values

$1 \times 10^4$  to  $< 1 \times 10^{11}$  ohms

$1 \times 10^4$  to  $< 1 \times 10^{11}$  ohms

$< 20$  nJ

Teflon: 0.09 nC/sq. in.

Quartz: 0.01 nC/sq. in.

$< 30$  volts

### Physical Properties

Film Thickness

Width (Inside Dimensions)

Length (Inside Dimensions)

Light Transmission

Heat Seal

Tensile Strength

Puncture Resistance

Non-corrosive

Silicone

Marking Adhesion

Nominal 0.0030" (0.0762mm)  $\pm 10\%$  MIL-STD-3010, 1003

Nominal -0" / + 0.125"

Nominal  $\pm 0.125$ "

$> 40\%$  (Tobias)

$> 10$  lbs/in

4600 PSI, 32 MPa

$> 10$  lbs

Pass

Not detected

Pass

### Meets Requirements of:

ESD Protective Packaging

Level 3 Technical Requirements

### Test Procedures/Method

ANSI/ESD STM11.11

ANSI/ESD STM11.11

ANSI/ESD STM11.31, EIA 541

Modified Incline Plane

Modified Incline Plane

ANSI/EIA-541/Appendix E, 1kV Discharge

ASTM D-1003

375°F, 1/2 sec 60 psi

ASTM 882

MIL-STD-3010, 2065

MIL-STD-3010, M3005

FTIR

IPC-TM-650 2.4.1

## ANSI/ESD S541 Section 6.2 Outside an EPA

"Transportation of sensitive products outside of an EPA shall require packaging that provides:

1. Low charge generation
2. Dissipative or conductive materials for intimate contact
3. A structure that provides electrostatic discharge shielding."

### RoHS, REACH and Conflict Minerals Statement

See the Desco Industries RoHS, REACH, and Conflict Minerals Statement:

[Desco.com/pdf/REACHRoHSConflictMinerals-Desco\\_Bags.pdf](https://desco.com/pdf/REACHRoHSConflictMinerals-Desco_Bags.pdf)

See the Desco Limited Warranty:

[Desco.DescoIndustries.com/Limited-Warranty.aspx](https://desco.descoindustries.com/Limited-Warranty.aspx)

Low Charging Static  
Dissipative Proprietary  
Outer Polyester Layer

Aluminum Shielding Layer

Low Charging Static  
Dissipative Proprietary  
Inner Polyethylene Layer



### Mixed Unsortable Plastic Scrap

Mixed unsortable plastic scrap shall contain assorted plastics of multiple grades that are co-extruded, bonded or laminated together which are unsortable into individual grades

**Desco's bags are recyclable**

Statshield® bags are packaged 100 per package in an oversized shielding bag.  
See Shielding Bag Storage at [TB-7057](#).

Statshield® and Statfree® are Registered Trademarks of Desco Industries Inc.  
See Bag Selection Chart Click [HERE](#).



Made in the  
United States of America

Specifications and procedures subject to change without notice.

## STATSHIELD® METAL-IN BOXED, 0.0030" (0.0762mm)

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: [Desco.com](https://desco.com)  
PHONE (909) 627-8178

DESCO EAST: ONE COLGATE WAY, CANTON, MA 02021-1407  
PHONE (781) 821-8370

**DRAWING  
NUMBER**  
13330

**DATE:**  
April  
2018

**DESCO**

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)