



26.5GHZ LOW LOSS RF COAX CABLE ASSEMBLIES 2.92MM(K) AND SMA STAINLESS STEEL CONNECTORS



26.5GHz Low Loss Coaxial Cables

Features:

Strain Relief:	Heavy duty adhesive strain relief
Center Conductor:	Silver-plated solid copper
Inner Braid:	Flat Silver plated copper strip
Outer Braid:	PC (Round Silver-plated copper braid)
Dielectric:	Low density microporous PTFE (Polytetrafluoroethylene)
Jacket:	FEP (Fluorinated Ethylene Propylene)
Cable Outer Dia.:	0.205 (5.21mm)
Connectors:	SST, corrosion-resistant 303 stainless steel per ASTM-A582 (Passivated finish per SAE-AMS-2700)
Center Pin:	GPBC (Gold-plated beryllium copper)
Jacket Color:	Grey
Operating Temperature:	-55°C to +85°C (2.9mm and SMA) -55°C to +125°C (SMA only)
Minimum Bend Radius:	1.1"

Custom Lengths Available

Connector Corrosion (salt spray):

MIL-STD-202, method 101, test cond. B 5% salt solution.

Connector Durability:

500 connections Min.

Electrical Specifications:

Impedance:	50 Ohms
Frequency:	Up to 26.5 GHz
Insertion Loss:	<0.5 dB/ft at 26.5GHz
VSWR:	<1.35 to 26.5GHz
Max Oper. Volt:	500V RMS
Nominal Capacitance:	27.0 pF/ft
Velocity of Propagation:	76%
RF Shielding:	< -90 dB
Attenuation (dB/ft):	0.05 Max. at 500MHz 0.11 Max at 2GHz 0.30 Max at 12GHz 0.38 Max at 18GHz 0.50 Max at 26.5GHz

*connector loss not included



Electrical Test Data Supplied With Each Cable Assembly

2.92mm(K) / 2.92mm(K) [Straight/Straight]

Part Number	Description	Length
CCK26.5-MM-190-30	26.5GHz Low Loss Coax Cable, 2.92mm(K) Male/Male, Straight/Straight	30"
CCK26.5-MM-190-36	26.5GHz Low Loss Coax Cable, 2.92mm(K) Male/Male, Straight/Straight	36"
CCK26.5-MM-190-39.4	26.5GHz Low Loss Coax Cable, 2.92mm(K) Male/Male, Straight/Straight	39.4"
CCK26.5-MM-190-48	26.5GHz Low Loss Coax Cable, 2.92mm(K) Male/Male, Straight/Straight	48"

SMA / SMA [Straight/Straight]

Part Number	Description	Length
CCSMA26.5-MM-190-30	26.5GHz Low Loss Coax Cable, SMA Male/Male, Straight/Straight	30"
CCSMA26.5-MM-190-36	26.5GHz Low Loss Coax Cable, SMA Male/Male, Straight/Straight	36"
CCSMA26.5-MM-190-39.4	26.5GHz Low Loss Coax Cable, SMA Male/Male, Straight/Straight	39.4"
CCSMA26.5-MM-190-48	26.5GHz Low Loss Coax Cable, SMA Male/Male, Straight/Straight	48"



CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913

PHONE: 239-561-3311 • 800-237-3061



FAX: 239-561-1025 • WWW.CRYSTEK.COM

Rev.: A
Date: 01-05-10



CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

26.5GHZ LOW LOSS RF COAX CABLE ASSEMBLIES 2.92MM(K) AND SMA STAINLESS STEEL CONNECTORS

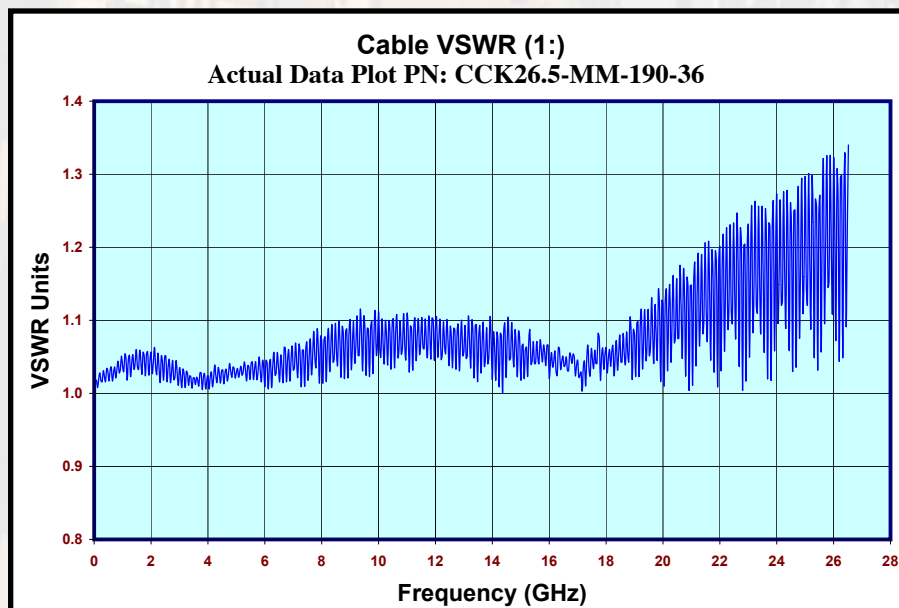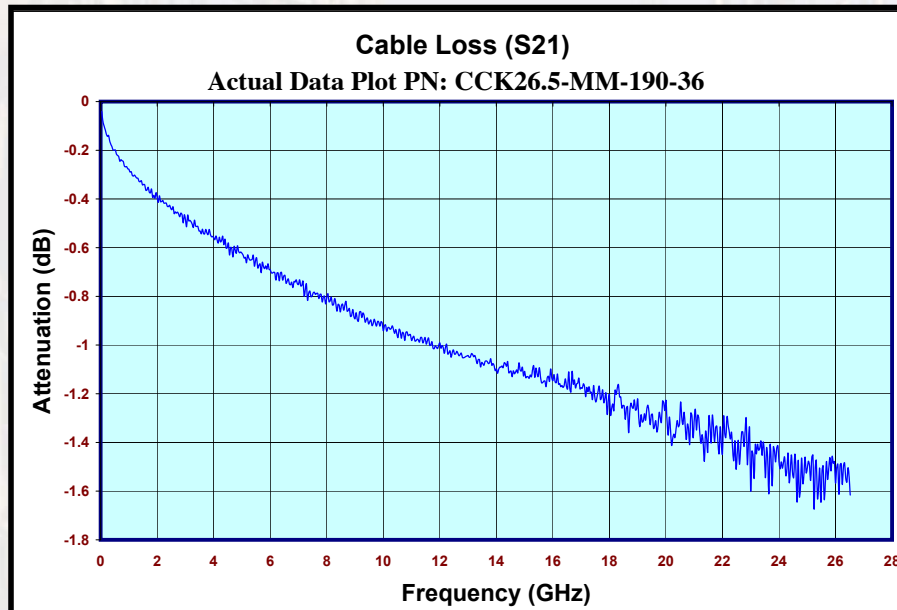

CRYSTEK
CORPORATION



12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913
PHONE: 239-561-3311 • 800-237-3061
FAX: 239-561-1025 • WWW.CRYSTEK.COM

Rev.: A
Date: 01-05-10



CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

26.5GHZ LOW LOSS RF
COAX CABLE ASSEMBLIES
2.92MM(K) AND SMA
STAINLESS STEEL
CONNECTORS

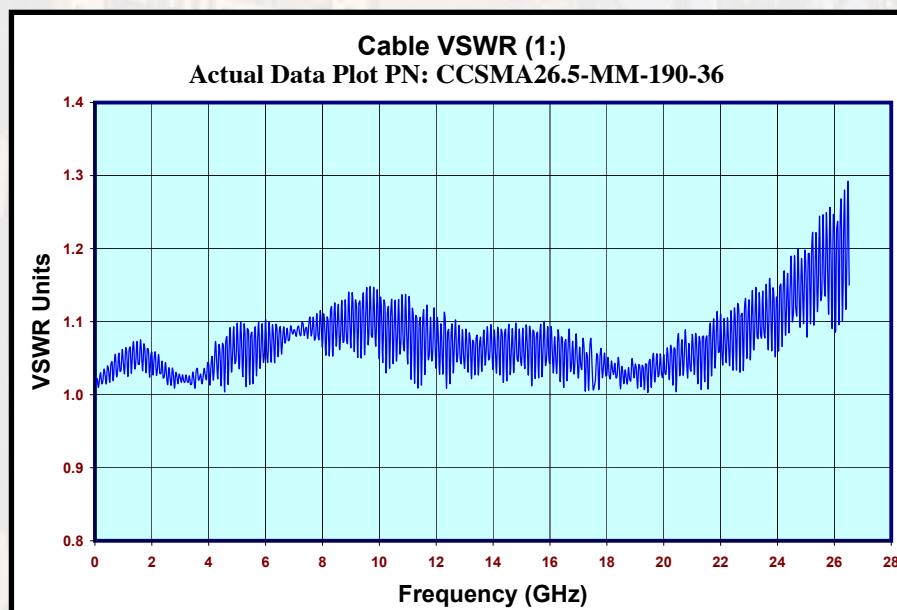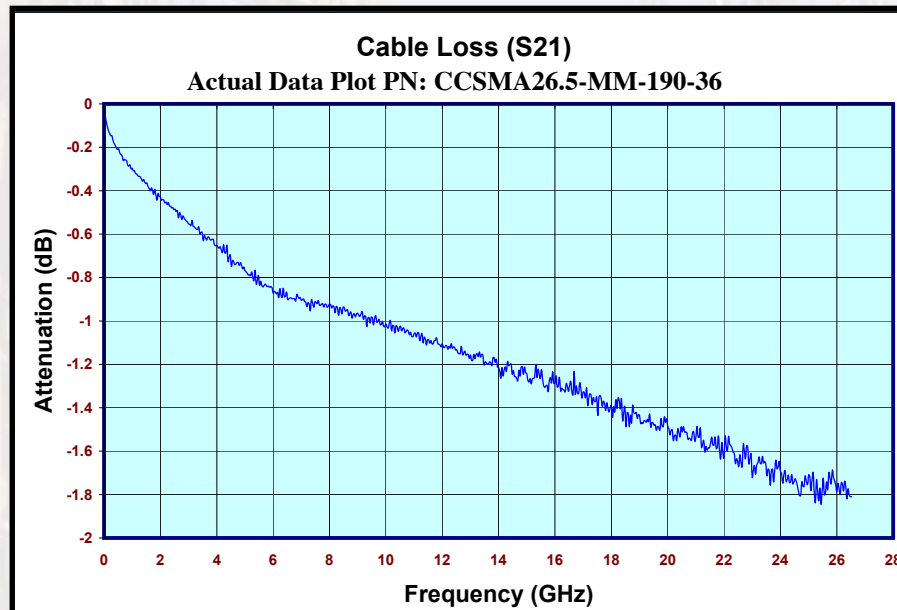

CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913
PHONE: 239-561-3311 • 800-237-3061
FAX: 239-561-1025 • WWW.CRYSTEK.COM

Rev.: A
Date: 01-05-10

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru