

PTC/CAD 2D

DRAWN

TSM 03AUG99

CHECK

JAF

03AUG99

CHECK

REVISIONS

A C095161

TSM 3AUG99

ISSUE 4

M

CATALOG LISTING

21EN42-6

PAGE 1 OF 1

RELEASE NO. PR-22324

REPLACES

MICRO SWITCH  
a Honeywell Division

FED. MFG. CODE 91929


SWITCH-ENCLOSED

CATALOG LISTING




21EN42-6

CIRCUIT SEQUENCE

PLUNGER OPERATE  
CIRCUIT 4-5 (N.C.) MUST BREAK  
PRIOR TO CIRCUIT 1-2 (N.C.)  
PLUNGER RELEASE  
CIRCUIT 1-3 (N.O.) MUST BREAK  
PRIOR TO CIRCUIT 4-6 (N.O.)

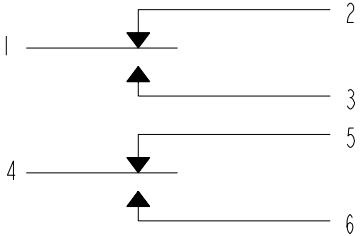


CIRCUIT DIAGRAM

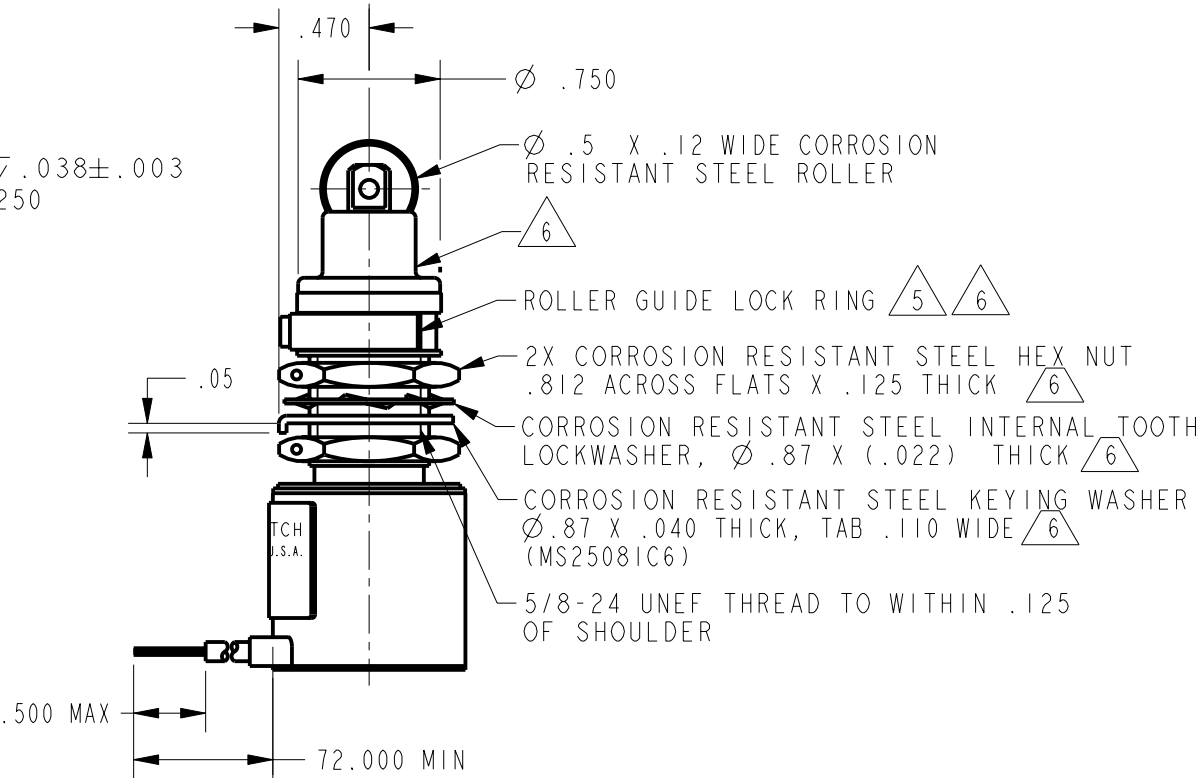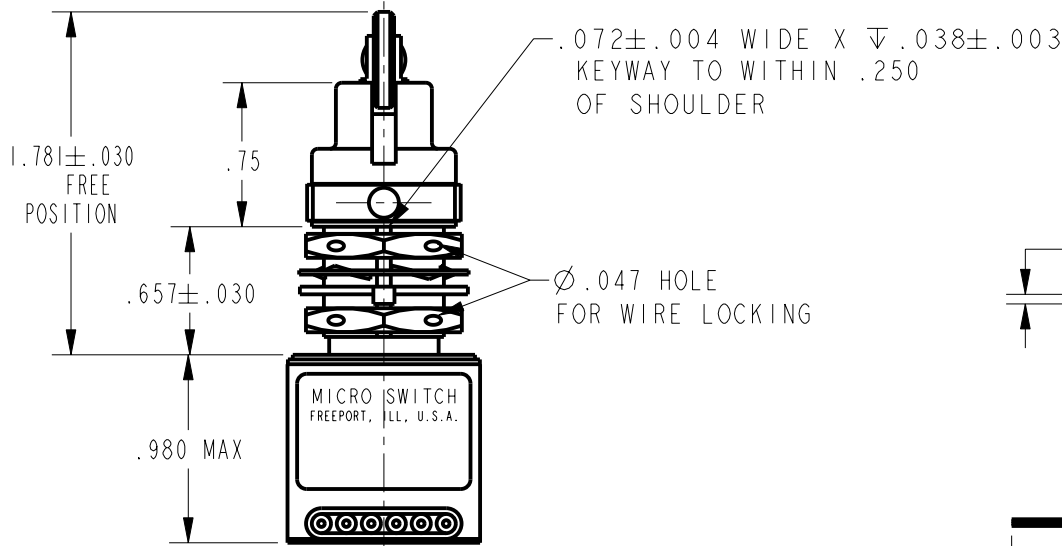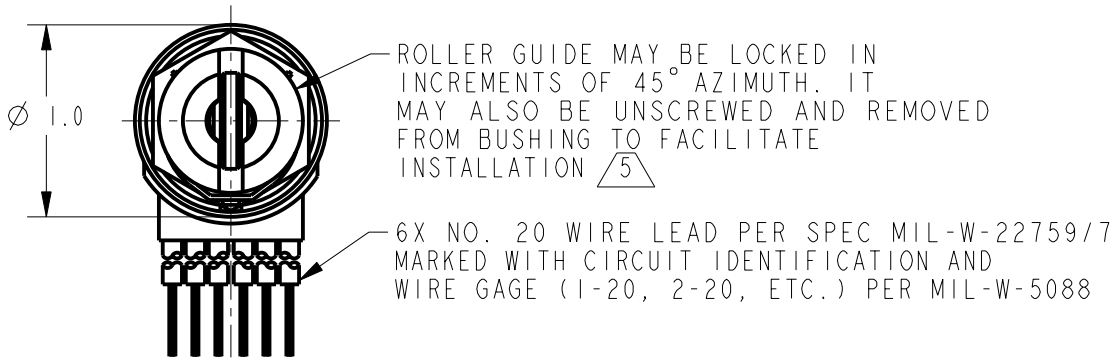

- NOTES
- 1 - CORROSION RESISTANT STEEL ENCLOSURE
  - 2 - SWITCH SEALED PER MIL-PRF-8805 SYMBOL 4
  - 3 - CIRCUIT DIAGRAM, DATE CODE, FED. MFG. CODE AND CATALOG LISTINGS ARE SHOWN ON NAMEPLATE
  - 4 - COINCIDENCE OF OPERATING AND RELEASING POINTS: .025 OF PLUNGER TRAVEL
  - 5 - TO ADJUST ROLLER DIRECTION, REMOVE ROLLER GUIDE LOCK RING, SCREW ROLLER GUIDE DOWN AS FAR AS POSSIBLE, THEN UNSCREW TO DESIRED DIRECTION. SECURE BY REPLACING ROLLER GUIDE LOCK RING.
  - 6 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

| CHARACTERISTICS                    |  | ELECTRICAL DATA                   |           |            |
|------------------------------------|--|-----------------------------------|-----------|------------|
| OPERATING FORCE ----- 6-12 LB      |  | CONTACT ARRANGEMENT<br>2X S P D T |           |            |
| DIFFERENTIAL FORCE ----- 30 LB MAX |  | LOAD                              | 28 VDC    |            |
| RELEASE FORCE ----- 4 LB MIN       |  |                                   | SEA LEVEL | 50,000 FT. |
| PRETRAVEL ----- .060 MAX           |  | RES                               | 4         | 4          |
| DIFFERENTIAL TRAVEL ----- .040 MAX |  | IND                               | 2         | 2          |
| OVERTRAVEL ----- .230 MIN          |  | MOTOR                             | 4         |            |
|                                    |  |                                   |           |            |



SCALE FULL

DO NOT SCALE PRINT

|                                           |               |
|-------------------------------------------|---------------|
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE |               |
| ONE PLACE                                 | (.0) ± .030   |
| TWO PLACE                                 | (.00) ± .015  |
| THREE PLACE                               | (.000) ± .005 |
| ANGLES                                    | ±             |
| WEIGHT                                    | 8.9 OZ MAX    |

ANSI Y14.5M-1982 APPLIES

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)