

# 74AHC374; 74AHCT374

Octal D-type flip-flop; positive edge-trigger; 3-state

Rev. 03 — 12 June 2008

Product data sheet

## 1. General description

---

The 74AHC374; 74AHCT374 is a high-speed Si-gate CMOS device and is pin compatible with Low-power Schottky TTL (LSTTL). It is specified in compliance with JEDEC standard No. 7-A.

The 74AHC374; 74AHCT374 comprises eight D-type flip-flops featuring separate D-type inputs for each flip-flop and 3-state outputs for bus oriented applications. A clock input (CP) and an output enable input ( $\overline{OE}$ ) are common to all flip-flops.

The eight flip-flops will store the state of their individual D inputs that meet the set-up and hold times requirements for the LOW-to-HIGH CP transition.

When  $\overline{OE}$  is LOW the content of the eight flip-flops is available at the outputs. When  $\overline{OE}$  is HIGH, the outputs go to the high-impedance OFF-state. Operation of the  $\overline{OE}$  input does not affect the state of the flip-flops.

## 2. Features

---


- Balanced propagation delays
- All inputs have Schmitt-trigger actions
- Inputs accept voltages higher than  $V_{CC}$
- Common 3-state output enable input
- Input levels:
  - ◆ For 74AHC374: CMOS level
  - ◆ For 74AHCT374: TTL level
- ESD protection:
  - ◆ HBM EIA/JESD22-A114E exceeds 2000 V
  - ◆ MM EIA/JESD22-A115-A exceeds 200 V
  - ◆ CDM EIA/JESD22-C101C exceeds 1000 V
- Multiple package options
- Specified from  $-40\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$  and from  $-40\text{ }^{\circ}\text{C}$  to  $+125\text{ }^{\circ}\text{C}$

### 3. Ordering information

Table 1. Ordering information

| Type number      | Package           |         |  | Version  |
|------------------|-------------------|---------|--|----------|
|                  | Temperature range | Name    | Description  |          |
| <b>74AHC374</b>  |                   |         |  |          |
| 74AHC374D        | −40 °C to +125 °C | SO20    | plastic small outline package; 20 leads; body width 7.5 mm             | SOT163-1 |
| 74AHC374PW       | −40 °C to +125 °C | TSSOP20 | plastic thin shrink small outline package; 20 leads; body width 4.4 mm | SOT360-1 |
| <b>74AHCT374</b> |                   |         |  |          |
| 74AHCT374D       | −40 °C to +125 °C | SO20    | plastic small outline package; 20 leads; body width 7.5 mm             | SOT163-1 |
| 74AHCT374PW      | −40 °C to +125 °C | TSSOP20 | plastic thin shrink small outline package; 20 leads; body width 4.4 mm | SOT360-1 |

### 4. Functional diagram

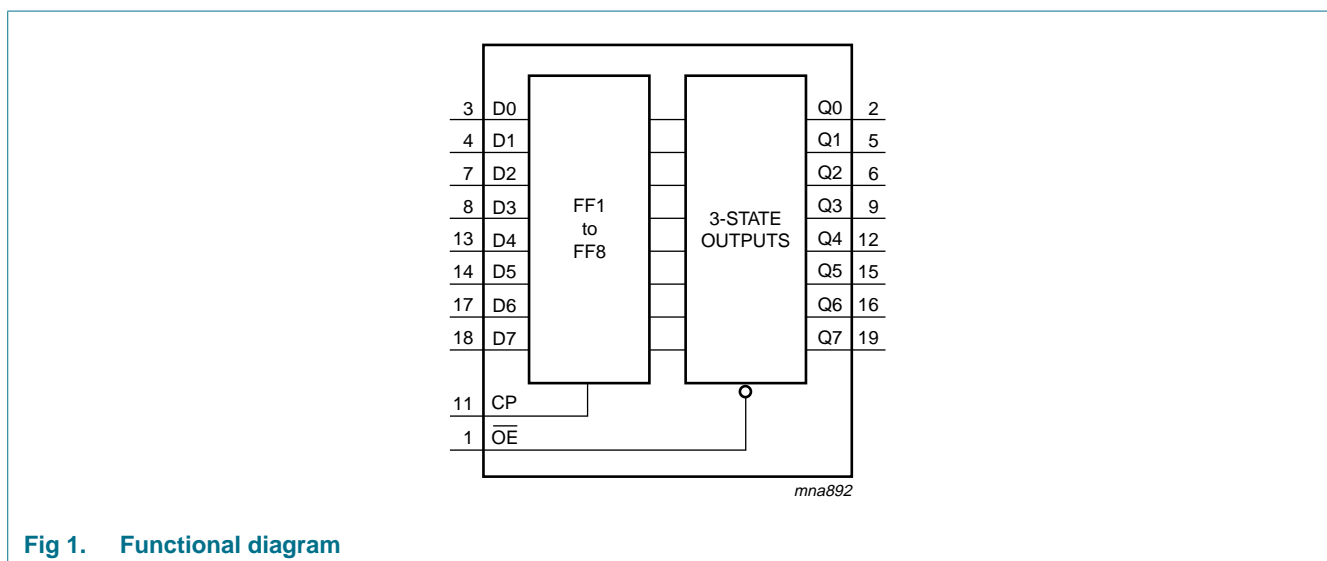

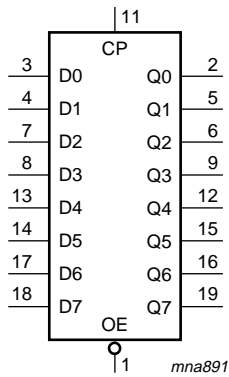


Fig 2. Logic symbol

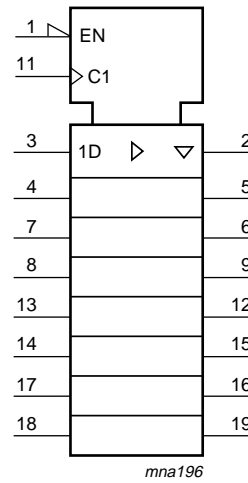


Fig 3. IEC logic symbol

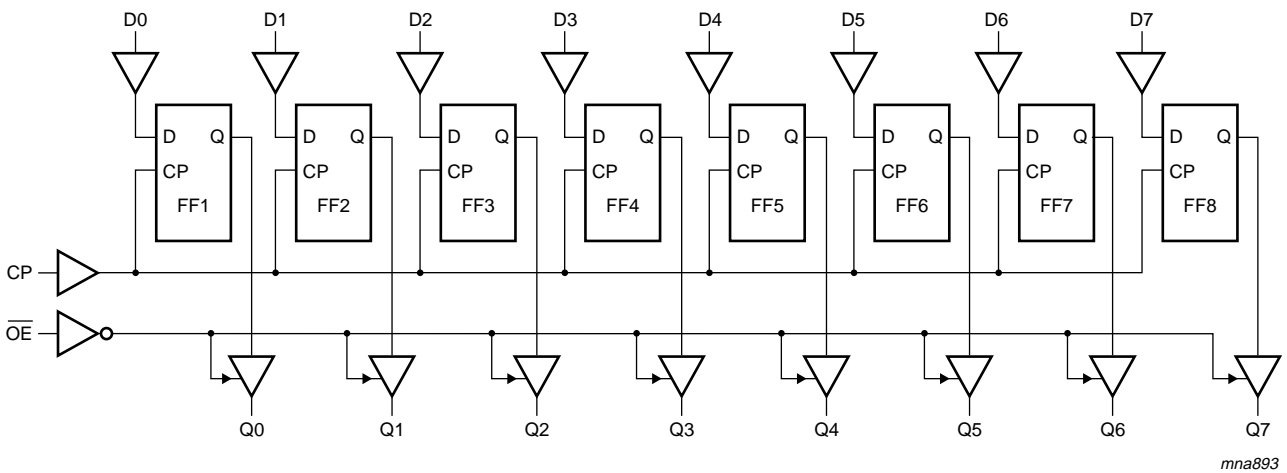


Fig 4. Logic diagram

## 5. Pinning information

### 5.1 Pinning

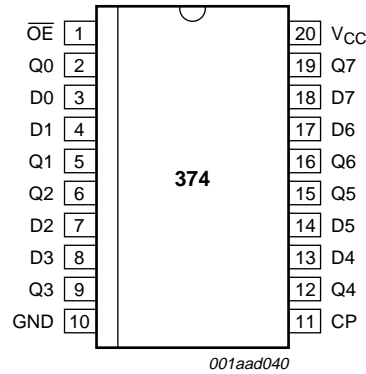


Fig 5. Pin configuration SO20 and TSSOP20

### 5.2 Pin description

Table 2. Pin description

| Symbol          | Pin | Description                               |
|-----------------|-----|---|
| $\overline{OE}$ | 1   | 3-state output enable input (active LOW)  |
| Q0              | 2   | 3-state flip-flop output                  |
| D0              | 3   | data input                                |
| D1              | 4   | data input                                |
| Q1              | 5   | 3-state flip-flop output                  |
| Q2              | 6   | 3-state flip-flop output                  |
| D2              | 7   | data input                                |
| D3              | 8   | data input                                |
| Q3              | 9   | 3-state flip-flop output                  |
| GND             | 10  | ground (0 V)                              |
| CP              | 11  | clock input (LOW-to-HIGH, edge triggered) |
| Q4              | 12  | 3-state flip-flop output                  |
| D4              | 13  | data input                                |
| D5              | 14  | data input                                |
| Q5              | 15  | 3-state flip-flop output                  |
| Q6              | 16  | 3-state flip-flop output                  |
| D6              | 17  | data input                                |
| D7              | 18  | data input                                |
| Q7              | 19  | 3-state flip-flop output                  |
| V <sub>CC</sub> | 20  | supply voltage                            |

## 6. Functional description

Table 3. Function table<sup>[1]</sup>

| Operating mode                    | Control         |    | Input | Internal flip-flop | Output   |
|-----------------------------------|-----------------|----|-------|--------------------|----------|
|                                   | $\overline{OE}$ | CP | Dn    |                    | Q0 to Q7 |
| Load and read register            | L               | ↑  | l     | L                  | L        |
|                                   | L               | ↑  | h     | H                  | H        |
| Load register and disable outputs | H               | ↑  | l     | L                  | Z        |
|                                   | H               | ↑  | h     | H                  | Z        |

- [1] H = HIGH voltage level;  
 h = HIGH voltage level one setup time prior to the LOW-to-HIGH CP transition;  
 L = LOW voltage level;  
 l = LOW voltage level one setup time prior to the LOW-to-HIGH CP transition;  
 X = don't care;  
 ↑ = LOW-to-HIGH CP transition;  
 Z = high-impedance OFF-state.

## 7. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

| Symbol    | Parameter               | Conditions                               | Min                | Max  | Unit |
|-----------|-------------------------|--|--------------------|------|------|
| $V_{CC}$  | supply voltage          |  | -0.5               | +7.0 | V    |
| $V_I$     | input voltage           |  | -0.5               | +7.0 | V    |
| $I_{IK}$  | input clamping current  | $V_I < -0.5$ V                           | <sup>[1]</sup> -20 | -    | mA   |
| $I_{OK}$  | output clamping current | $V_O < -0.5$ V or $V_O > V_{CC} + 0.5$ V | <sup>[1]</sup> -20 | +20  | mA   |
| $I_O$     | output current          | $V_O = -0.5$ V to $(V_{CC} + 0.5)$ V     | -25                | +25  | mA   |
| $I_{CC}$  | supply current          |  | -                  | +75  | mA   |
| $I_{GND}$ | ground current          |  | -75                | -    | mA   |
| $T_{stg}$ | storage temperature     |  | -65                | +150 | °C   |
| $P_{tot}$ | total power dissipation | $T_{amb} = -40$ °C to +125 °C            | <sup>[2]</sup> -   | 500  | mW   |

- [1] The input and output voltage ratings may be exceeded if the input and output current ratings are observed.  
 [2] For SO20 packages: above 70 °C the value of  $P_{tot}$  derates linearly at 8 mW/K.  
 For TSSOP20 packages: above 60 °C the value of  $P_{tot}$  derates linearly at 5.5 mW/K.

## 8. Recommended operating conditions

Table 5. Operating conditions

| Symbol              | Parameter                           | Conditions                              | Min | Typ | Max      | Unit |
|---------------------|-------------------------------------|---|-----|-----|----------|------|
| <b>74AHC374</b>     |                                     |   |     |     |          |      |
| $V_{CC}$            | supply voltage                      |   | 2.0 | 5.0 | 5.5      | V    |
| $V_I$               | input voltage                       |   | 0   | -   | 5.5      | V    |
| $V_O$               | output voltage                      |   | 0   | -   | $V_{CC}$ | V    |
| $T_{amb}$           | ambient temperature                 |   | -40 | +25 | +125     | °C   |
| $\Delta t/\Delta V$ | input transition rise and fall rate | $V_{CC} = 3.0\text{ V to }3.6\text{ V}$ | -   | -   | 100      | ns/V |
|                     |                                     | $V_{CC} = 4.5\text{ V to }5.5\text{ V}$ | -   | -   | 20       | ns/V |
| <b>74AHCT374</b>    |                                     |   |     |     |          |      |
| $V_{CC}$            | supply voltage                      |   | 4.5 | 5.0 | 5.5      | V    |
| $V_I$               | input voltage                       |   | 0   | -   | 5.5      | V    |
| $V_O$               | output voltage                      |   | 0   | -   | $V_{CC}$ | V    |
| $T_{amb}$           | ambient temperature                 |   | -40 | +25 | +125     | °C   |
| $\Delta t/\Delta V$ | input transition rise and fall rate | $V_{CC} = 4.5\text{ V to }5.5\text{ V}$ | -   | -   | 20       | ns/V |

## 9. Static characteristics

Table 6. Static characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol          | Parameter                                     | Conditions                                      | 25 °C |      |      | -40 °C to +85 °C |      | -40 °C to +125 °C |      | Unit |
|-----------------|---|---|-------|------|------|------------------|------|-------------------|------|------|
|                 |   |   | Min   | Typ  | Max  | Min              | Max  | Min               | Max  |      |
| <b>74AHC374</b> |   |   |       |      |      |                  |      |                   |      |      |
| $V_{IH}$        | HIGH-level input voltage                      | $V_{CC} = 2.0\text{ V}$                         | 1.5   | -    | -    | 1.5              | -    | 1.5               | -    | V    |
|                 |   | $V_{CC} = 3.0\text{ V}$                         | 2.1   | -    | -    | 2.1              | -    | 2.1               | -    | V    |
|                 |   | $V_{CC} = 5.5\text{ V}$                         | 3.85  | -    | -    | 3.85             | -    | 3.85              | -    | V    |
| $V_{IL}$        | LOW-level input voltage                       | $V_{CC} = 2.0\text{ V}$                         | -     | -    | 0.5  | -                | 0.5  | -                 | 0.5  | V    |
|                 |   | $V_{CC} = 3.0\text{ V}$                         | -     | -    | 0.9  | -                | 0.9  | -                 | 0.9  | V    |
|                 |   | $V_{CC} = 5.5\text{ V}$                         | -     | -    | 1.65 | -                | 1.65 | -                 | 1.65 | V    |
| $V_{OH}$        | HIGH-level output voltage                     | $V_I = V_{IH}$ or $V_{IL}$                      |       |      |      |                  |      |                   |      |      |
|                 |   | $I_O = -50\ \mu\text{A}; V_{CC} = 2.0\text{ V}$ | 1.9   | 2.0  | -    | 1.9              | -    | 1.9               | -    | V    |
|                 |   | $I_O = -50\ \mu\text{A}; V_{CC} = 3.0\text{ V}$ | 2.9   | 3.0  | -    | 2.9              | -    | 2.9               | -    | V    |
|                 |   | $I_O = -50\ \mu\text{A}; V_{CC} = 4.5\text{ V}$ | 4.4   | 4.5  | -    | 4.4              | -    | 4.4               | -    | V    |
|                 |   | $I_O = -4.0\text{ mA}; V_{CC} = 3.0\text{ V}$   | 2.58  | -    | -    | 2.48             | -    | 2.40              | -    | V    |
|                 | $I_O = -8.0\text{ mA}; V_{CC} = 4.5\text{ V}$ | 3.94  | -     | -    | 3.80 | -                | 3.70 | -                 | V    |      |
| $V_{OL}$        | LOW-level output voltage                      | $V_I = V_{IH}$ or $V_{IL}$                      |       |      |      |                  |      |                   |      |      |
|                 |   | $I_O = 50\ \mu\text{A}; V_{CC} = 2.0\text{ V}$  | -     | 0    | 0.1  | -                | 0.1  | -                 | 0.1  | V    |
|                 |   | $I_O = 50\ \mu\text{A}; V_{CC} = 3.0\text{ V}$  | -     | 0    | 0.1  | -                | 0.1  | -                 | 0.1  | V    |
|                 |   | $I_O = 50\ \mu\text{A}; V_{CC} = 4.5\text{ V}$  | -     | 0    | 0.1  | -                | 0.1  | -                 | 0.1  | V    |
|                 |   | $I_O = 4.0\text{ mA}; V_{CC} = 3.0\text{ V}$    | -     | -    | 0.36 | -                | 0.44 | -                 | 0.55 | V    |
|                 | $I_O = 8.0\text{ mA}; V_{CC} = 4.5\text{ V}$  | -   | -     | 0.36 | -    | 0.44             | -    | 0.55              | V    |      |

**Table 6. Static characteristics ...continued**

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol   | Parameter                | Conditions   | 25 °C |     |            | -40 °C to +85 °C |           | -40 °C to +125 °C |            | Unit          |
|----------|--------------------------|--|-------|-----|------------|------------------|-----------|-------------------|------------|---------------|
|          |                          |  | Min   | Typ | Max        | Min              | Max       | Min               | Max        |               |
| $I_I$    | input leakage current    | $V_I = 5.5 \text{ V}$ or GND;<br>$V_{CC} = 0 \text{ V}$ to 5.5 V                   | -     | -   | 0.1        | -                | 1.0       | -                 | 2.0        | $\mu\text{A}$ |
| $I_{OZ}$ | OFF-state output current | $V_I = V_{IH}$ or $V_{IL}$ ;<br>$V_O = V_{CC}$ or GND;<br>$V_{CC} = 5.5 \text{ V}$ | -     | -   | $\pm 0.25$ | -                | $\pm 2.5$ | -                 | $\pm 10.0$ | $\mu\text{A}$ |
| $I_{CC}$ | supply current           | $V_I = V_{CC}$ or GND; $I_O = 0 \text{ A}$ ;<br>$V_{CC} = 5.5 \text{ V}$           | -     | -   | 4.0        | -                | 40        | -                 | 80         | $\mu\text{A}$ |
| $C_I$    | input capacitance        | $V_I = V_{CC}$ or GND  | -     | 3   | 10         | -                | 10        | -                 | 10         | pF            |
| $C_O$    | output capacitance       |  | -     | 4   | -          | -                | -         | -                 | -          | pF            |

**74AHCT374**

|                 |                           |   |      |     |            |      |           |      |            |               |
|-----------------|---------------------------|---|------|-----|------------|------|-----------|------|------------|---------------|
| $V_{IH}$        | HIGH-level input voltage  | $V_{CC} = 4.5 \text{ V}$ to 5.5 V   | 2.0  | -   | -          | 2.0  | -         | 2.0  | -          | V             |
| $V_{IL}$        | LOW-level input voltage   | $V_{CC} = 4.5 \text{ V}$ to 5.5 V   | -    | -   | 0.8        | -    | 0.8       | -    | 0.8        | V             |
| $V_{OH}$        | HIGH-level output voltage | $V_I = V_{IH}$ or $V_{IL}$ ; $V_{CC} = 4.5 \text{ V}$<br>$I_O = -50 \mu\text{A}$  | 4.4  | 4.5 | -          | 4.4  | -         | 4.4  | -          | V             |
|                 |                           | $I_O = -8.0 \text{ mA}$   | 3.94 | -   | -          | 3.80 | -         | 3.70 | -          | V             |
|                 |                           |   |      |     |            |      |           |      |            |               |
| $V_{OL}$        | LOW-level output voltage  | $V_I = V_{IH}$ or $V_{IL}$ ; $V_{CC} = 4.5 \text{ V}$<br>$I_O = 50 \mu\text{A}$   | -    | 0   | 0.1        | -    | 0.1       | -    | 0.1        | V             |
|                 |                           | $I_O = 8.0 \text{ mA}$  | -    | -   | 0.36       | -    | 0.44      | -    | 0.55       | V             |
|                 |                           |   |      |     |            |      |           |      |            |               |
| $I_I$           | input leakage current     | $V_I = 5.5 \text{ V}$ or GND;<br>$V_{CC} = 0 \text{ V}$ to 5.5 V  | -    | -   | 0.1        | -    | 1.0       | -    | 2.0        | $\mu\text{A}$ |
| $I_{OZ}$        | OFF-state output current  | $V_I = V_{IH}$ or $V_{IL}$ ;<br>$V_O = V_{CC}$ or GND per input pin; other inputs at $V_{CC}$ or GND; $I_O = 0 \text{ A}$ ;<br>$V_{CC} = 5.5 \text{ V}$ | -    | -   | $\pm 0.25$ | -    | $\pm 2.5$ | -    | $\pm 10.0$ | $\mu\text{A}$ |
| $I_{CC}$        | supply current            | $V_I = V_{CC}$ or GND; $I_O = 0 \text{ A}$ ;<br>$V_{CC} = 5.5 \text{ V}$  | -    | -   | 4.0        | -    | 40        | -    | 80         | $\mu\text{A}$ |
| $\Delta I_{CC}$ | additional supply current | per input pin;<br>$V_I = V_{CC} - 2.1 \text{ V}$ ; other pins at $V_{CC}$ or GND; $I_O = 0 \text{ A}$ ;<br>$V_{CC} = 4.5 \text{ V}$ to 5.5 V            | -    | -   | 1.35       | -    | 1.5       | -    | 1.5        | mA            |
| $C_I$           | input capacitance         | $V_I = V_{CC}$ or GND   | -    | 3   | 10         | -    | 10        | -    | 10         | pF            |
| $C_O$           | output capacitance        |   | -    | 4   | -          | -    | -         | -    | -          | pF            |

## 10. Dynamic characteristics

**Table 7. Dynamic characteristics**

Voltages are referenced to GND (ground = 0 V); for test circuit see [Figure 9](#).

| Symbol          | Parameter         | Conditions   | 25 °C |                    |      | -40 °C to +85 °C |      | -40 °C to +125 °C |      | Unit |
|-----------------|-------------------|--|-------|--------------------|------|------------------|------|-------------------|------|------|
|                 |                   |  | Min   | Typ <sup>[1]</sup> | Max  | Min              | Max  | Min               | Max  |      |
| <b>74AHC374</b> |                   |  |       |                    |      |                  |      |                   |      |      |
| $t_{pd}$        | propagation delay | CP to Qn; see <a href="#">Figure 6</a> and <a href="#">Figure 8</a> <sup>[2]</sup> |       |                    |      |                  |      |                   |      |      |
|                 |                   | $V_{CC} = 3.0\text{ V to }3.6\text{ V}$  |       |                    |      |                  |      |                   |      |      |
|                 |                   | $C_L = 15\text{ pF}$   | -     | 6.4                | 12.7 | 1.0              | 15.0 | 1.0               | 16.0 | ns   |
|                 |                   | $C_L = 50\text{ pF}$   | -     | 8.4                | 16.2 | 1.0              | 18.5 | 1.0               | 20.5 | ns   |
|                 |                   | $V_{CC} = 4.5\text{ V to }5.5\text{ V}$  |       |                    |      |                  |      |                   |      |      |
|                 |                   | $C_L = 15\text{ pF}$   | -     | 4.4                | 8.1  | 1.0              | 9.5  | 1.0               | 10.0 | ns   |
| $t_{en}$        | enable time       | $\overline{OE}$ to Qn; see <a href="#">Figure 7</a> <sup>[3]</sup>                 |       |                    |      |                  |      |                   |      |      |
|                 |                   | $V_{CC} = 3.0\text{ V to }3.6\text{ V}$  |       |                    |      |                  |      |                   |      |      |
|                 |                   | $C_L = 15\text{ pF}$   | -     | 5.5                | 11.0 | 1.0              | 13.0 | 1.0               | 14.0 | ns   |
|                 |                   | $C_L = 50\text{ pF}$   | -     | 7.3                | 14.5 | 1.0              | 16.5 | 1.0               | 18.0 | ns   |
|                 |                   | $V_{CC} = 4.5\text{ V to }5.5\text{ V}$  |       |                    |      |                  |      |                   |      |      |
|                 |                   | $C_L = 15\text{ pF}$   | -     | 3.9                | 7.6  | 1.0              | 9.0  | 1.0               | 9.5  | ns   |
| $t_{dis}$       | disable time      | $\overline{OE}$ to Qn; see <a href="#">Figure 7</a> <sup>[4]</sup>                 |       |                    |      |                  |      |                   |      |      |
|                 |                   | $V_{CC} = 3.0\text{ V to }3.6\text{ V}$  |       |                    |      |                  |      |                   |      |      |
|                 |                   | $C_L = 15\text{ pF}$   | -     | 5.6                | 10.5 | 1.0              | 12.5 | 1.0               | 13.0 | ns   |
|                 |                   | $C_L = 50\text{ pF}$   | -     | 9.4                | 14.0 | 1.0              | 16.0 | 1.0               | 17.5 | ns   |
|                 |                   | $V_{CC} = 4.5\text{ V to }5.5\text{ V}$  |       |                    |      |                  |      |                   |      |      |
|                 |                   | $C_L = 15\text{ pF}$   | -     | 4.2                | 6.8  | 1.0              | 8.0  | 1.0               | 8.5  | ns   |
| $f_{max}$       | maximum frequency | see <a href="#">Figure 6</a>   |       |                    |      |                  |      |                   |      |      |
|                 |                   | $V_{CC} = 3.0\text{ V to }3.6\text{ V}$  |       |                    |      |                  |      |                   |      |      |
|                 |                   | $C_L = 15\text{ pF}$   | 80    | 130                | -    | 70               | -    | 70                | -    | MHz  |
|                 |                   | $C_L = 50\text{ pF}$   | 55    | 85                 | -    | 50               | -    | 50                | -    | MHz  |
|                 |                   | $V_{CC} = 4.5\text{ V to }5.5\text{ V}$  |       |                    |      |                  |      |                   |      |      |
|                 |                   | $C_L = 15\text{ pF}$   | 130   | 185                | -    | 110              | -    | 110               | -    | MHz  |
| $t_W$           | pulse width       | CP HIGH or LOW; see <a href="#">Figure 6</a>                                       |       |                    |      |                  |      |                   |      |      |
|                 |                   | $V_{CC} = 3.0\text{ V to }3.6\text{ V}$  | 5.0   | -                  | -    | 5.5              | -    | 5.5               | -    | ns   |
|                 |                   | $V_{CC} = 4.5\text{ V to }5.5\text{ V}$  | 5.0   | -                  | -    | 5.0              | -    | 5.0               | -    | ns   |
| $t_{su}$        | set-up time       | Dn to CP; see <a href="#">Figure 8</a>   |       |                    |      |                  |      |                   |      |      |
|                 |                   | $V_{CC} = 3.0\text{ V to }3.6\text{ V}$  | 4.5   | -                  | -    | 4.0              | -    | 4.0               | -    | ns   |
|                 |                   | $V_{CC} = 4.5\text{ V to }5.5\text{ V}$  | 3.0   | -                  | -    | 3.0              | -    | 3.0               | -    | ns   |



**Table 7. Dynamic characteristics ...continued**Voltages are referenced to GND (ground = 0 V); for test circuit see [Figure 9](#).

| Symbol   | Parameter                     | Conditions   | 25 °C |                    |      | -40 °C to +85 °C |      | -40 °C to +125 °C |      | Unit |
|--|-------------------------------|--|-------|--------------------|------|------------------|------|-------------------|------|------|
|  |                               |  | Min   | Typ <sup>[1]</sup> | Max  | Min              | Max  | Min               | Max  |      |
| $t_h$  | hold time                     | Dn to CP; see <a href="#">Figure 8</a>   |       |                    |      |                  |      |                   |      |      |
|  |                               | $V_{CC} = 3.0\text{ V to }3.6\text{ V}$  | 2.0   | -                  | -    | 2.0              | -    | 2.0               | -    | ns   |
|  |                               | $V_{CC} = 4.5\text{ V to }5.5\text{ V}$  | 2.0   | -                  | -    | 2.0              | -    | 2.0               | -    | ns   |
| $C_{PD}$   | power dissipation capacitance | $f_i = 1\text{ MHz}; V_I = \text{GND to }V_{CC}$ <sup>[5]</sup>                    | -     | 10                 | -    | -                | -    | -                 | -    | pF   |
| <b>74AHCT374; <math>V_{CC} = 4.5\text{ V to }5.5\text{ V}</math></b> |                               |  |       |                    |      |                  |      |                   |      |      |
| $t_{pd}$   | propagation delay             | CP to Qn; see <a href="#">Figure 6</a> and <a href="#">Figure 8</a> <sup>[2]</sup> |       |                    |      |                  |      |                   |      |      |
|  |                               | $C_L = 15\text{ pF}$   | -     | 4.3                | 9.4  | 1.0              | 10.5 | 1.0               | 12.0 | ns   |
|  |                               | $C_L = 50\text{ pF}$   | -     | 5.6                | 10.4 | 1.0              | 11.5 | 1.0               | 13.0 | ns   |
| $t_{en}$   | enable time                   | $\overline{OE}$ to Qn; see <a href="#">Figure 7</a> <sup>[3]</sup>                 |       |                    |      |                  |      |                   |      |      |
|  |                               | $C_L = 15\text{ pF}$   | -     | 3.5                | 10.2 | 1.0              | 11.5 | 1.0               | 13.0 | ns   |
|  |                               | $C_L = 50\text{ pF}$   | -     | 4.8                | 11.2 | 1.0              | 12.5 | 1.0               | 14.0 | ns   |
| $t_{dis}$  | disable time                  | $\overline{OE}$ to Qn; see <a href="#">Figure 7</a> <sup>[4]</sup>                 |       |                    |      |                  |      |                   |      |      |
|  |                               | $C_L = 15\text{ pF}$   | -     | 3.6                | 10.2 | 1.0              | 11.0 | 1.0               | 13.0 | ns   |
|  |                               | $C_L = 50\text{ pF}$   | -     | 5.7                | 11.2 | 1.0              | 12.0 | 1.0               | 14.0 | ns   |
| $f_{max}$  | maximum frequency             | see <a href="#">Figure 6</a>   |       |                    |      |                  |      |                   |      |      |
|  |                               | $C_L = 15\text{ pF}$   | 90    | 140                | -    | 80               | -    | 80                | -    | MHz  |
|  |                               | $C_L = 50\text{ pF}$   | 85    | 130                | -    | 75               | -    | 75                | -    | MHz  |
| $t_W$  | pulse width                   | CP HIGH or LOW; see <a href="#">Figure 6</a>                                       | 6.5   | -                  | -    | 6.5              | -    | 6.5               | -    | ns   |
| $t_{su}$   | set-up time                   | Dn to CP; see <a href="#">Figure 8</a>   | 2.5   | -                  | -    | 2.5              | -    | 2.5               | -    | ns   |
| $t_h$  | hold time                     | Dn to CP; see <a href="#">Figure 8</a>   | 2.5   | -                  | -    | 2.5              | -    | 2.5               | -    | ns   |
| $C_{PD}$   | power dissipation capacitance | $f_i = 1\text{ MHz}; V_I = \text{GND to }V_{CC}$ <sup>[5]</sup>                    | -     | 12                 | -    | -                | -    | -                 | -    | pF   |

[1] Typical values are measured at nominal supply voltage ( $V_{CC} = 3.3\text{ V}$  and  $V_{CC} = 5.0\text{ V}$ ).

[2]  $t_{pd}$  is the same as  $t_{PLH}$  and  $t_{PHL}$ .

[3]  $t_{en}$  is the same as  $t_{PZH}$  and  $t_{PZL}$ .

[4]  $t_{dis}$  is the same as  $t_{PHZ}$  and  $t_{PLZ}$ .

[5]  $C_{PD}$  is used to determine the dynamic power dissipation ( $P_D$  in  $\mu\text{W}$ ).

$$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o) \text{ where:}$$

$f_i$  = input frequency in MHz;

$f_o$  = output frequency in MHz;


$C_L$  = output load capacitance in pF;

$V_{CC}$  = supply voltage in V;

$N$  = number of inputs switching;

$\Sigma(C_L \times V_{CC}^2 \times f_o)$  = sum of the outputs.


## 10.1 Waveforms

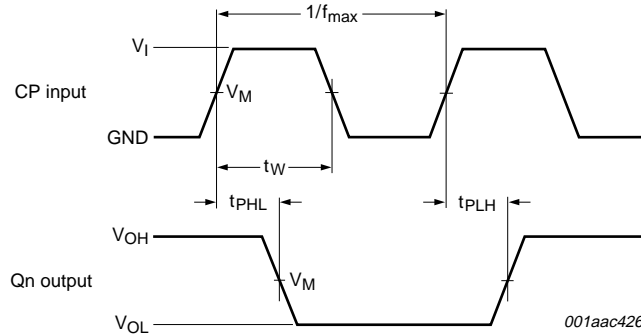

Measurement points are given in [Table 8](#).

$V_{OL}$  and  $V_{OH}$  are typical voltage output levels that occur with the output load.


**Fig 6. Clock pulse width, maximum frequency and input to output propagation delays**

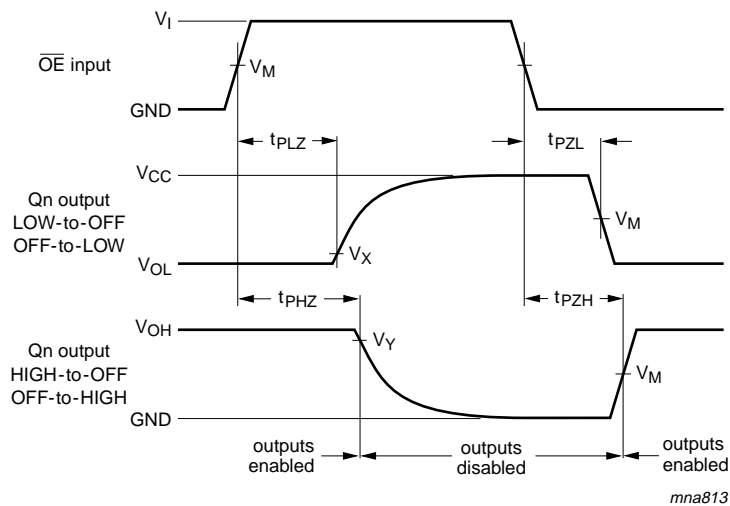

Measurement points are given in [Table 8](#).

$V_{OL}$  and  $V_{OH}$  are typical voltage output levels that occur with the output load.

**Fig 7. Enable and disable times**

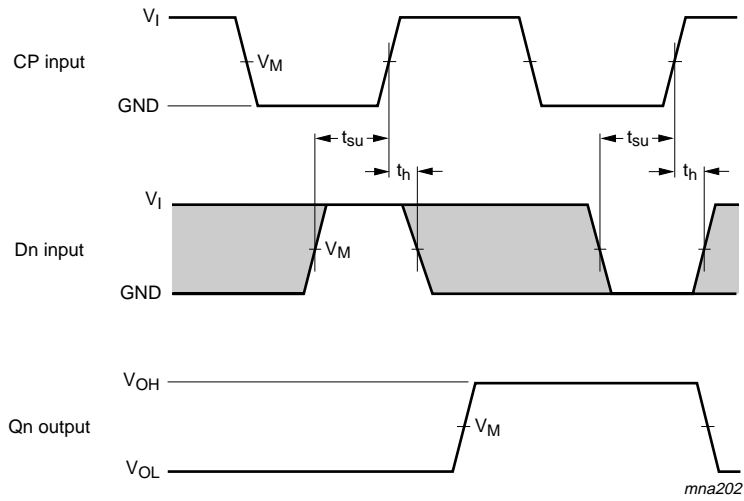

Measurement points are given in [Table 8](#).


The shaded areas indicate when the input is permitted to change for predictable output performance.

$V_{OL}$  and  $V_{OH}$  are typical voltage output levels that occur with the output load.

**Fig 8. Data set-up and hold times**

**Table 8. Measurement points**

| Type      | Input               | Output              |                          |                          |
|-----------|---------------------|---------------------|--------------------------|--------------------------|
|           | $V_M$               | $V_M$               | $V_X$                    | $V_Y$                    |
| 74AHC374  | $0.5 \times V_{CC}$ | $0.5 \times V_{CC}$ | $V_{OL} + 0.3 \text{ V}$ | $V_{OH} - 0.3 \text{ V}$ |
| 74AHCT374 | 1.5 V               | $0.5 \times V_{CC}$ | $V_{OL} + 0.3 \text{ V}$ | $V_{OH} - 0.3 \text{ V}$ |

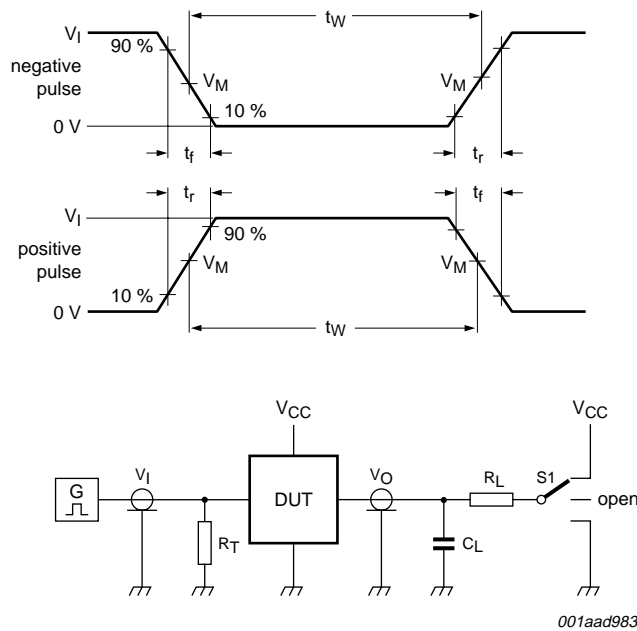

Test data is given in [Table 9](#).

Definitions test circuit:

$R_T$  = termination resistance should be equal to output impedance  $Z_o$  of the pulse generator.

$C_L$  = load capacitance including jig and probe capacitance.

$R_L$  = load resistance.

S1 = test selection switch.

**Fig 9. Test circuitry for measuring switching times**

**Table 9. Test data**

| Type      | Input    |               | Load         |              | S1 position        |                    |                    |
|-----------|----------|---------------|--------------|--------------|--------------------|--------------------|--------------------|
|           | $V_I$    | $t_r, t_f$    | $C_L$        | $R_L$        | $t_{PHL}, t_{PLH}$ | $t_{PZH}, t_{PHZ}$ | $t_{PZL}, t_{PLZ}$ |
| 74AHC374  | $V_{CC}$ | $\leq 3.0$ ns | 15 pF, 50 pF | 1 k $\Omega$ | open               | GND                | $V_{CC}$           |
| 74AHCT374 | 3.0 V    | $\leq 3.0$ ns | 15 pF, 50 pF | 1 k $\Omega$ | open               | GND                | $V_{CC}$           |

## 11. Package outline

SO20: plastic small outline package; 20 leads; body width 7.5 mm

SOT163-1



Fig 10. Package outline SOT163-1 (SO20)

TSSOP20: plastic thin shrink small outline package; 20 leads; body width 4.4 mm

SOT360-1



Fig 11. Package outline SOT360-1 (TSSOP20)

## 12. Abbreviations

Table 10. Abbreviations

| Acronym | Description                                    |
|---------|--|
| CDM     | Charged Device Model                           |
| CMOS    | Complementary Metal-Oxide Semiconductor        |
| DUT     | Device Under Test                              |
| ESD     | ElectroStatic Discharge                        |
| HBM     | Human Body Model                               |
| LSTTL   | Low-power Schottky Transistor-Transistor Logic |
| MM      | Machine Model                                  |

## 13. Revision history

Table 11. Revision history

| Document ID     | Release date  | Data sheet status     | Change notice | Supersedes      |
|-----------------|---|-----------------------|---------------|-----------------|
| 74AHC_AHCT374_3 | 20080612  | Product data sheet    | -             | 74AHC_AHCT374_2 |
| Modifications:  | <ul style="list-style-type: none"> <li>• The format of this data sheet has been redesigned to comply with the new identity guidelines of NXP Semiconductors.</li> <li>• Legal texts have been adapted to the new company name where appropriate.</li> <li>• <a href="#">Table 6</a>: the conditions for input leakage current have been changed.</li> </ul> |                       |               |                 |
| 74AHC_AHCT374_2 | 19990928  | Product specification | -             | 74AHC_AHCT374_1 |
| 74AHC_AHCT374_1 | 19981211  | Product specification | -             | -               |

## 14. Legal information

### 14.1 Data sheet status

| Document status <sup>[1][2]</sup> | Product status <sup>[3]</sup> | Definition  |
|-----------------------------------|-------------------------------|---|
| Objective [short] data sheet      | Development                   | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet    | Qualification                 | This document contains data from the preliminary specification.                       |
| Product [short] data sheet        | Production                    | This document contains the product specification.                                     |

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nexperia.com>.

### 14.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

### 14.3 Disclaimers

**General** — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

**Right to make changes** — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — Nexperia products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or

malfunction of a Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia accepts no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Terms and conditions of sale** — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nexperia.com/profile/terms>, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by Nexperia. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

### 14.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

## 15. Contact information

For more information, please visit: <http://www.nexperia.com>

For sales office addresses, please send an email to: [salesaddresses@nexperia.com](mailto:salesaddresses@nexperia.com)



## 16. Contents

---

|           |   |           |
|-----------|---|-----------|
| <b>1</b>  | <b>General description</b> .....              | <b>1</b>  |
| <b>2</b>  | <b>Features</b> .....                         | <b>1</b>  |
| <b>3</b>  | <b>Ordering information</b> .....             | <b>2</b>  |
| <b>4</b>  | <b>Functional diagram</b> .....               | <b>2</b>  |
| <b>5</b>  | <b>Pinning information</b> .....              | <b>4</b>  |
| 5.1       | Pinning .....                                 | 4         |
| 5.2       | Pin description .....                         | 4         |
| <b>6</b>  | <b>Functional description</b> .....           | <b>5</b>  |
| <b>7</b>  | <b>Limiting values</b> .....                  | <b>5</b>  |
| <b>8</b>  | <b>Recommended operating conditions</b> ..... | <b>6</b>  |
| <b>9</b>  | <b>Static characteristics</b> .....           | <b>6</b>  |
| <b>10</b> | <b>Dynamic characteristics</b> .....          | <b>8</b>  |
| 10.1      | Waveforms .....                               | 10        |
| <b>11</b> | <b>Package outline</b> .....                  | <b>13</b> |
| <b>12</b> | <b>Abbreviations</b> .....                    | <b>15</b> |
| <b>13</b> | <b>Revision history</b> .....                 | <b>15</b> |
| <b>14</b> | <b>Legal information</b> .....                | <b>16</b> |
| 14.1      | Data sheet status .....                       | 16        |
| 14.2      | Definitions .....                             | 16        |
| 14.3      | Disclaimers .....                             | 16        |
| 14.4      | Trademarks .....                              | 16        |
| <b>15</b> | <b>Contact information</b> .....              | <b>16</b> |
| <b>16</b> | <b>Contents</b> .....                         | <b>17</b> |

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)