



Humidity and Temperature Sensors

www.silabs.com/humidity-sensor



FEATURES

- Relative Humidity Sensor:
 - $\pm 4.5\%$ RH (maximum @ 20–80% RH)
- Temperature Sensor:
 - $\pm 0.5\text{ }^\circ\text{C}$ accuracy (typical)
 - $\pm 1\text{ }^\circ\text{C}$ accuracy (maximum @ 0 to $70\text{ }^\circ\text{C}$)
- 0 to 100% RH operating range
- -40 to $+85\text{ }^\circ\text{C}$ (-GM)
- 0 to $+70\text{ }^\circ\text{C}$ operating range (-FM)
- Wide operating voltage range (2.1 to 3.6 V)
- Low Power Consumption:
 - $240\text{ }\mu\text{A}$ during RH conversion
- I²C host interface
- Integrated on-chip heater
- 4 mm x 4 mm QFN package
- Excellent long term stability
- Factory calibrated
- Optional factory-installed filter/cover
 - Low-profile
 - Protection during reflow
 - Excludes liquids and particulates (hydrophobic/oleophobic)


APPLICATIONS

- Industrial HVAC/R
- Thermostats/humidistats
- Respiratory therapy
- White goods
- Micro-environments/data centers
- Automotive climate control and de-fogging
- Asset and goods tracking

LOWEST POWER INTEGRATED RH SENSOR

DIGITAL 1²C HUMIDITY AND TEMPERATURE SENSORS

The Si7005 is a digital relative humidity and temperature sensor. This monolithic CMOS IC integrates temperature and humidity sensor elements, an analog-to-digital converter, signal processing, calibration data, and an I²C host interface. The patented use of industry-standard, low-K polymeric dielectrics for sensing humidity enables the construction of a low-power, monolithic CMOS sensor IC with low drift and hysteresis and excellent long term stability. Both the temperature and humidity sensors are factory-calibrated and the calibration data is stored in the on-chip non-volatile memory. This ensures that the sensors are fully interchangeable, with no recalibration or software changes required. The Si7005 is packaged in a 4 mm x 4 mm QFN package and is reflow solderable.

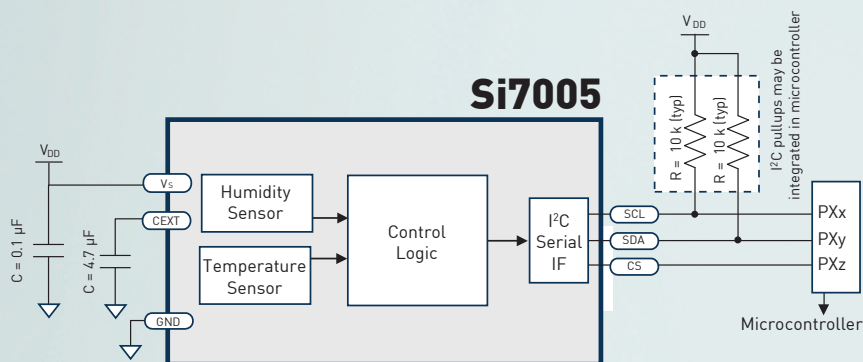



Humidity and Temperature Sensors

www.silabs.com/humidity-sensor

Si7005 Development Tools

The Si7005 is supported by a suite of hardware and software development tools that facilitate testing/characterization, prototyping and software development.

The **Si7005USB-DONGLE** Evaluation kit comes with everything developers need to demonstrate and evaluate the Si7005. The board plugs into a PC via a USB socket. It has a connector for adding the Si7005USB-EVB.


The optional **Si7005-EVB** is a small daughter card that permits evaluation of the Si7005 at the end of a flex cable. It is a useful add-on to the Si7005USB-DONGLE (it plugs right in) if the user wants to put a sensor in a temperature/humidity chamber or a product prototype.

The **Si7005EVB-UDP** is a small daughter card that permits evaluation of the Si7005 in conjunction with certain Unified Development Platform (UDP) components such as the C8051F960 Ultra-Low Power Microcontroller Development Kit. It plugs directly into UDP MCU cards for fast prototyping and software development. In addition to an on-board Si7005, there is a connector for adding an Si7005-EVB via its flex cable, allowing the user to place the Si7005 in a temperature/humidity chamber or a product prototype.

The **Si7005EVB-UDP-F960** Development Kit combines the C8051F960 Ultra-Low Power Microcontroller Development Kit and the Si7005EVB-UDP daughter card with data logger demonstration code. It is a complete package designed to support hardware and software development using the Si7005 and Silicon Lab's ultra-low power MCUs. It ships with example software that implements a portable, battery-powered data logger/asset tracker.




Si7005
USB DONGLE

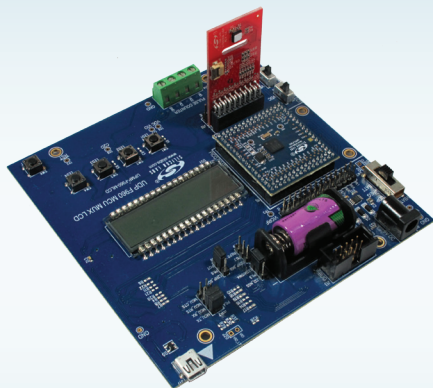

Si7005/C8051F960
UDP EVALUATION KIT



Si7005 UDP
DAUGHTER CARD



Si7005 EVB
DAUGHTER CARD

Digital I²C Humidity and Temperature Sensors

PART NUMBER	DESCRIPTION	TYP ACCURACY		TEMPERATURE RANGE	FILTER COVER	PACKAGE FORMAT	PACKAGE
		TEMP.	RH				
Si7005-B-FM	Compact digital relative humidity (RH) and temperature sensor IC, commercial grade	±0.5 °C	±3%	0 to 70 °C		Tube	QFN24
Si7005-B-FM1	Compact digital relative humidity (RH) and temperature sensor IC, commercial grade with pre-installed protective cover	±0.5 °C	±3%	0 to 70 °C	•	Tray	QFN24
Si7005-B-FM1R	Compact digital relative humidity (RH) and temperature sensor IC, commercial grade with pre-installed protective cover on tape and reel	±0.5 °C	±3%	0 to 70 °C	•	Tape-and-Reel	QFN24
Si7005-FMR	Compact digital relative humidity (RH) and temperature sensor IC, commercial grade on tape and reel	±0.5 °C	±3%	0 to 70 °C		Tape-and-Reel	QFN24
Si7005-B-GM	Compact digital relative humidity (RH) and temperature sensor IC, industrial grade	±0.5 °C	±3%	-40 to 85 °C		Tube	QFN24
Si7005-B-GM1	Compact digital relative humidity (RH) and temperature sensor IC, industrial grade with pre-installed protective cover	±0.5 °C	±3%	-40 to 85 °C	•	Tray	QFN24
Si7005-B-GM1R	Compact digital relative humidity (RH) and temperature sensor IC, industrial grade with pre-installed protective cover on tape and reel	±0.5 °C	±3%	-40 to 85 °C	•	Tape-and-Reel	QFN24
Si7005-GMR	Compact digital relative humidity (RH) and temperature sensor IC, industrial grade on tape and reel	±0.5 °C	±3%	-40 to 85 °C		Tape-and-Reel	QFN24



Mixed Sources
Product group from well-managed forests, controlled sources and recycled wood or fiber
www.fsc.org Cert no. SW-COC-001730
© 1996 Forest Stewardship Council



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru