
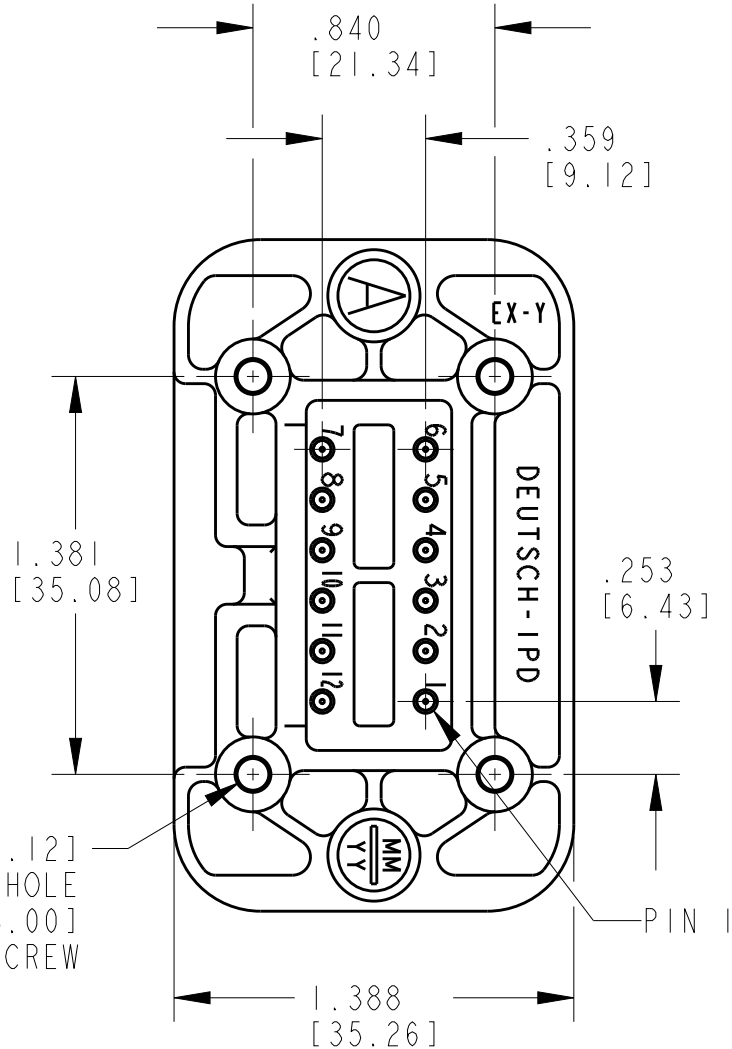
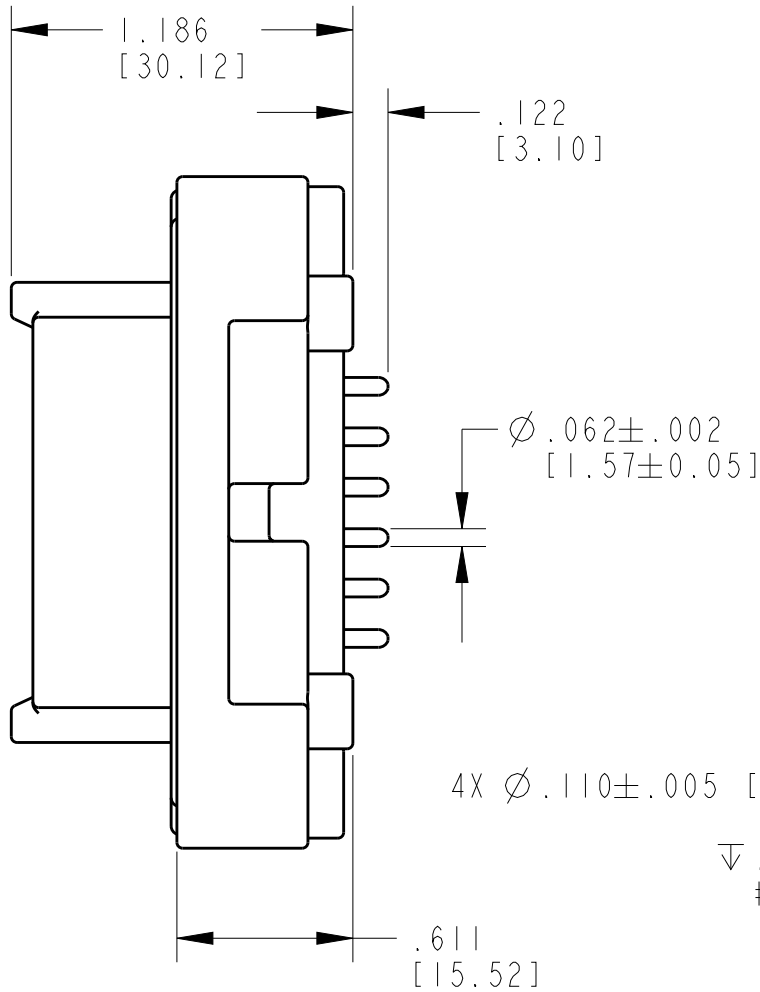
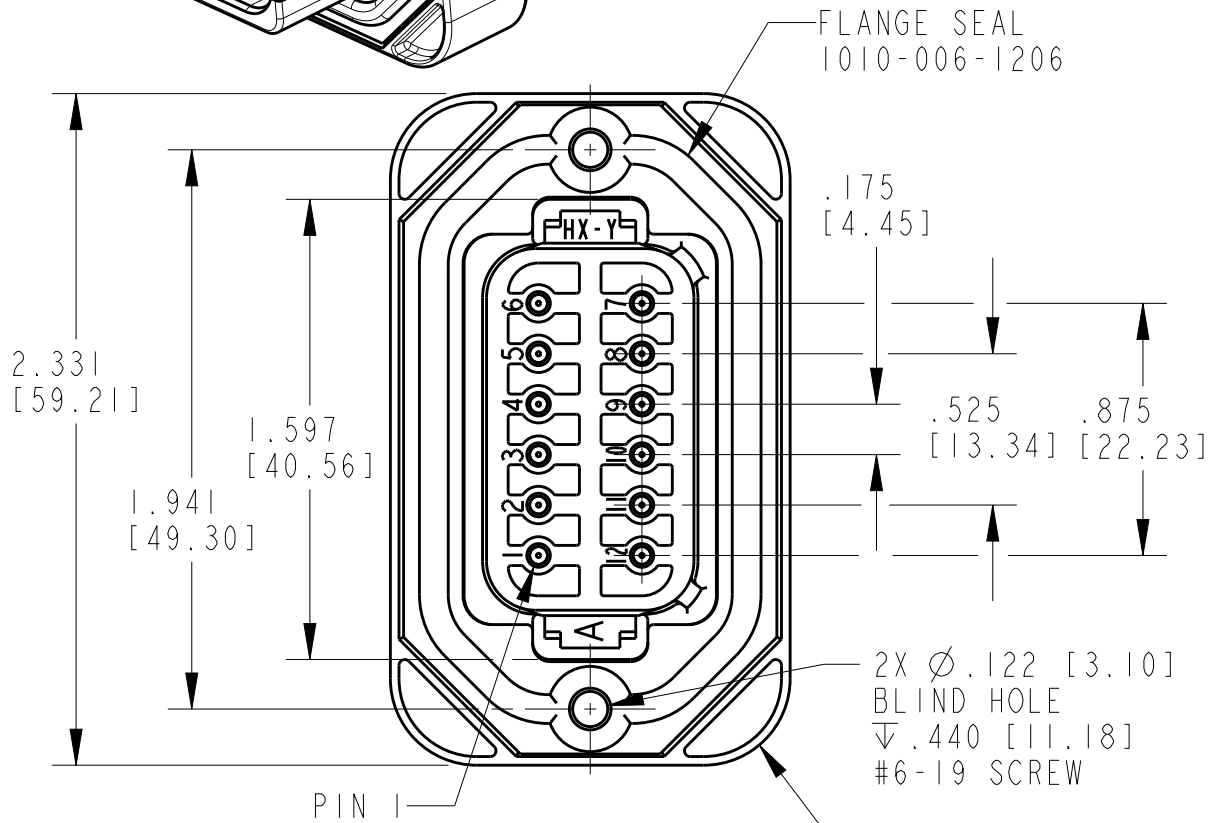


2		1							
LOC	DIST	REVISIONS							
		P	LTR	DESCRIPTION			DATE	DWN	APVD
			C1	REVISED PER ECO-14-010107			03JUL2014	JA	DM
			C2	REVISED PER ECO-16-006330			24MAR2016	VNB	DM

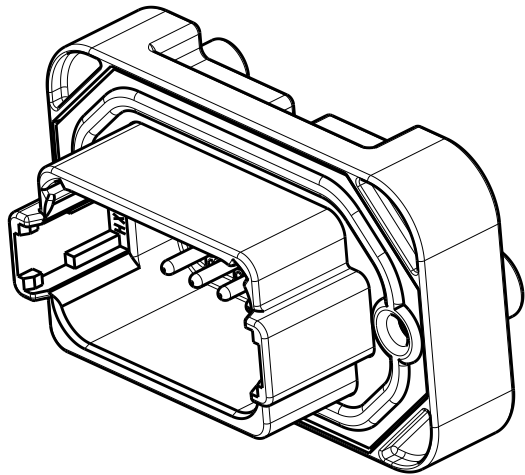

7. SEE SHEET 2 FOR OTHER KEY ARRANGEMENTS.
6. MOUNTING SCREW TORQUE VALUES ARE AS FOLLOWS:
#6-19 SCREWS: 11-15 IN-LB [1.24-1.70 N-m].
#4-20 SCREWS: 6-10 IN-LB [.68-1.13 N-m].
VALUES VALID FOR PLASTITE 48 SCREWS ONLY.
5. RECOMMENDED MOUNTING SCREWS (NOT INCLUDED): CAMCAR PLASTITE 48, SINGLE HELIX.
4. THIS RECEPTACLE MATES WITH DT06-12SX-XXXX PLUG (X = A,B,C,D KEYS, XXXX = ALL MODIFICATIONS).
3. CONTACT PLATING - MATING SIDE: NICKEL; PCB SIDE: TIN

2 MATERIALS:
HOUSING/PIN SPACER: PA46 GF30 (SEE SHEET 2 FOR COLORS)
FLANGE SEAL: VMQ (RED-ORANGE)
PIN CONTACTS: COPPER ALLOY

1 DIMENSION TOLERANCE: ±.025 [.64]
PANEL CUTOUT: ±.010 [.25]
PIN LOCATIONS: ±.005 [.13]
MOUNTING HOLE LOCATIONS: ±.010 [.13]

NOTES:

TE INTERNAL PN	DEUTSCH PN
DT15-12PA	DT15-12PA
DT15-12PB	DT15-12PB
DT15-12PC	DT15-12PC
DT15-12PD	DT15-12PD

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P. BURKE 08JUN2001	TE Connectivity		
DIMENSIONS: INCHES[mm]		CHK KEVIN MCKEE 03JUL2014			
		APVD DAVID MEYER 03JUL2014	NAME RECEPTACLE HEADER 12 PIN 180 DEG DT SERIES		
		PRODUCT SPEC	SIZE A3		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	CAGE CODE 4AFU8		
		WEIGHT	DRAWING NO C-DT15-12PX		
		MATERIAL	RESTRICTED TO		
FINISH		CUSTOMER DRAWING	SCALE 3:2		
2			SHEET 1 OF 2		
			REV C2		

4

3

2

1

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

2016

© COPYRIGHT 2016

BY TE CONNECTIVITY

ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
	-	SEE SHEET 1	-	-	-	

A KEYWAY

B KEYWAY

C KEYWAY

D KEYWAY

DATE CODE

DT15-12PA

COLOR GREY

DT15-12PB

COLOR BLACK

DT15-12PC

COLOR GREEN

DT15-12PD

COLOR BROWN

1.637 [41.58]
1.395 [35.43]
.440 [11.18]
.916 [23.27]
1.941 [49.30]

1.637 [41.58]
.916 [23.27]
1.941 [49.30]
4X R.250 [6.35]

RECOMMENDED PANEL CUTOUTS

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES[mm]

MATERIAL
2

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±0°30'0"

FINISH
-

DWN
P. BURKE
08JUN2001

CHK
KEVIN MCKEE
03JUL2014

APVD
DAVID MEYER
03JUL2014

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

TE Connectivity

NAME
RECEPTACLE HEADER
12 PIN 180 DEG
DT SERIES

SIZE
A3

CAGE CODE
4AFU8

DRAWING NO
C-DT15-12PX

RESTRICTED TO

SCALE
1:1

SHEET
2 OF 2

REV
C2

1470-19 (3/11)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru