

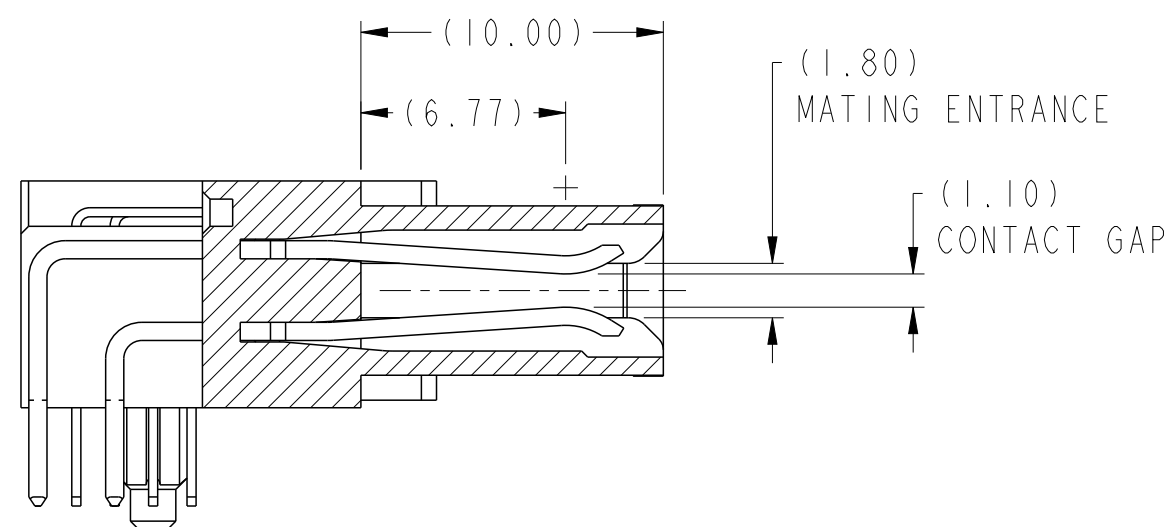
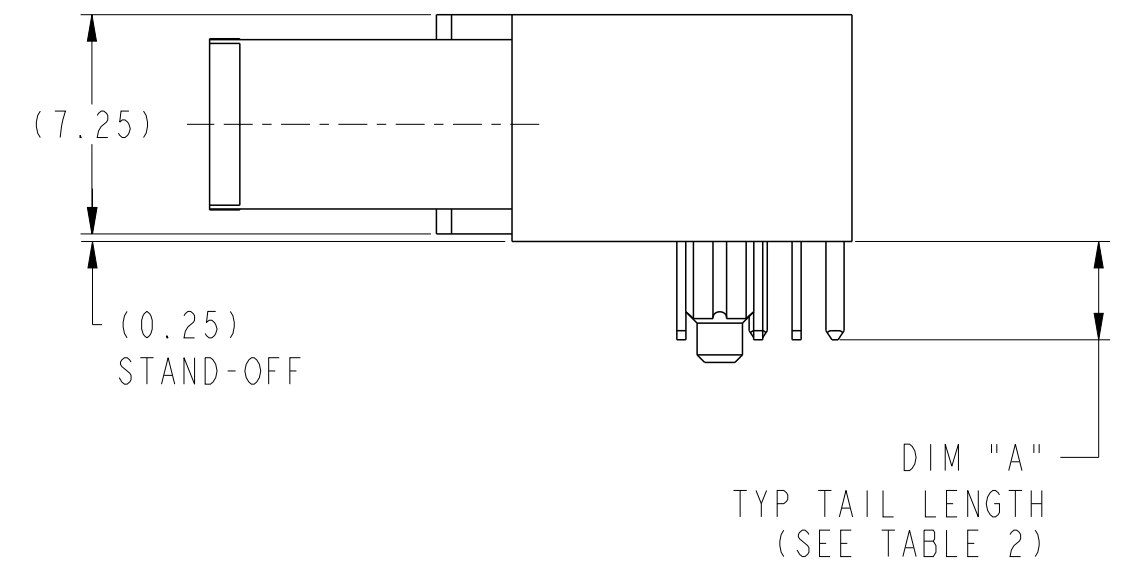
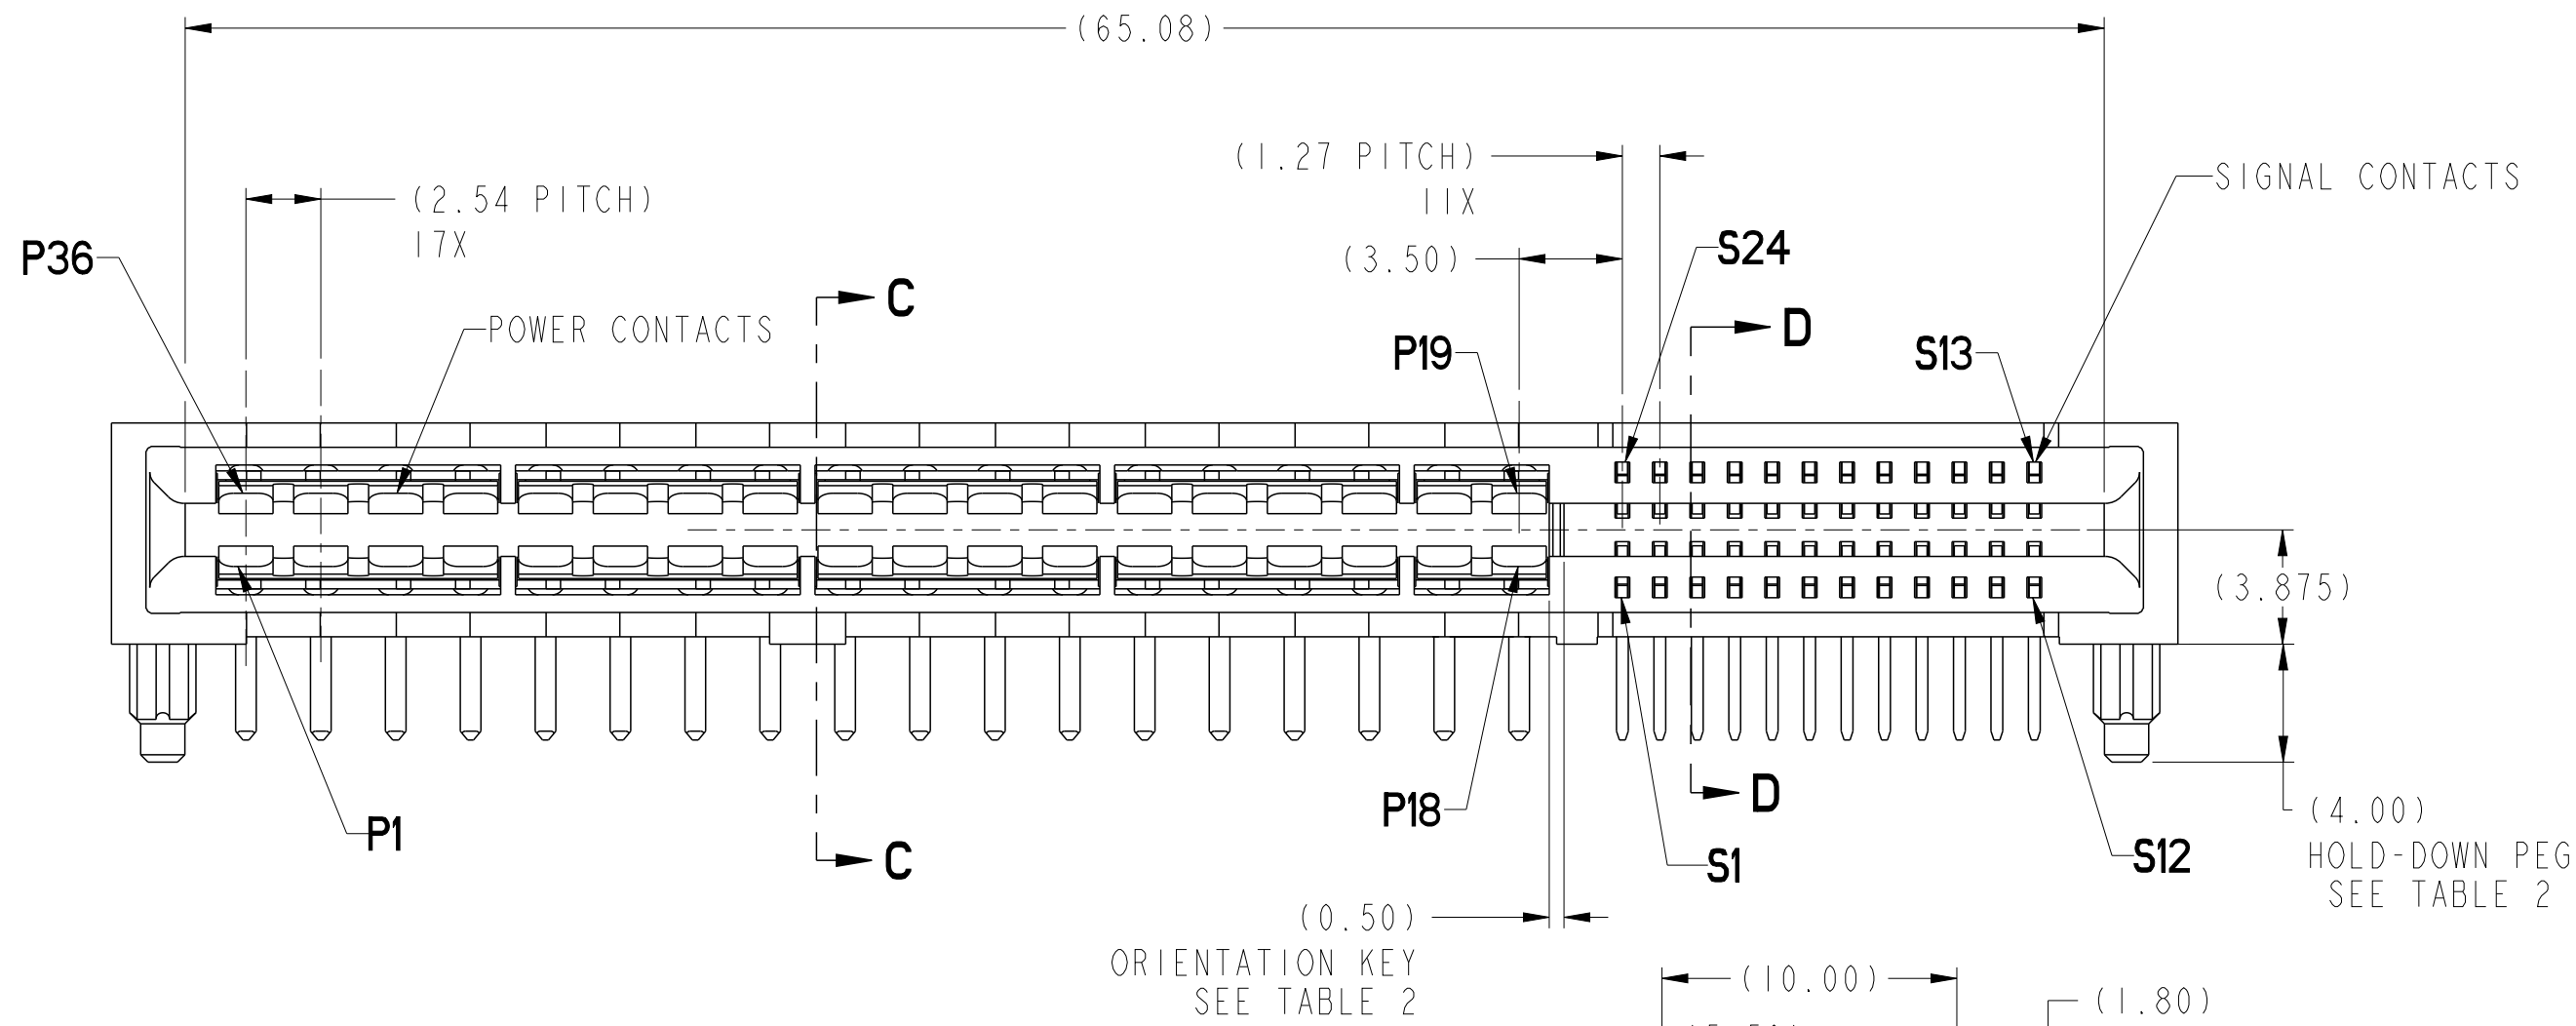



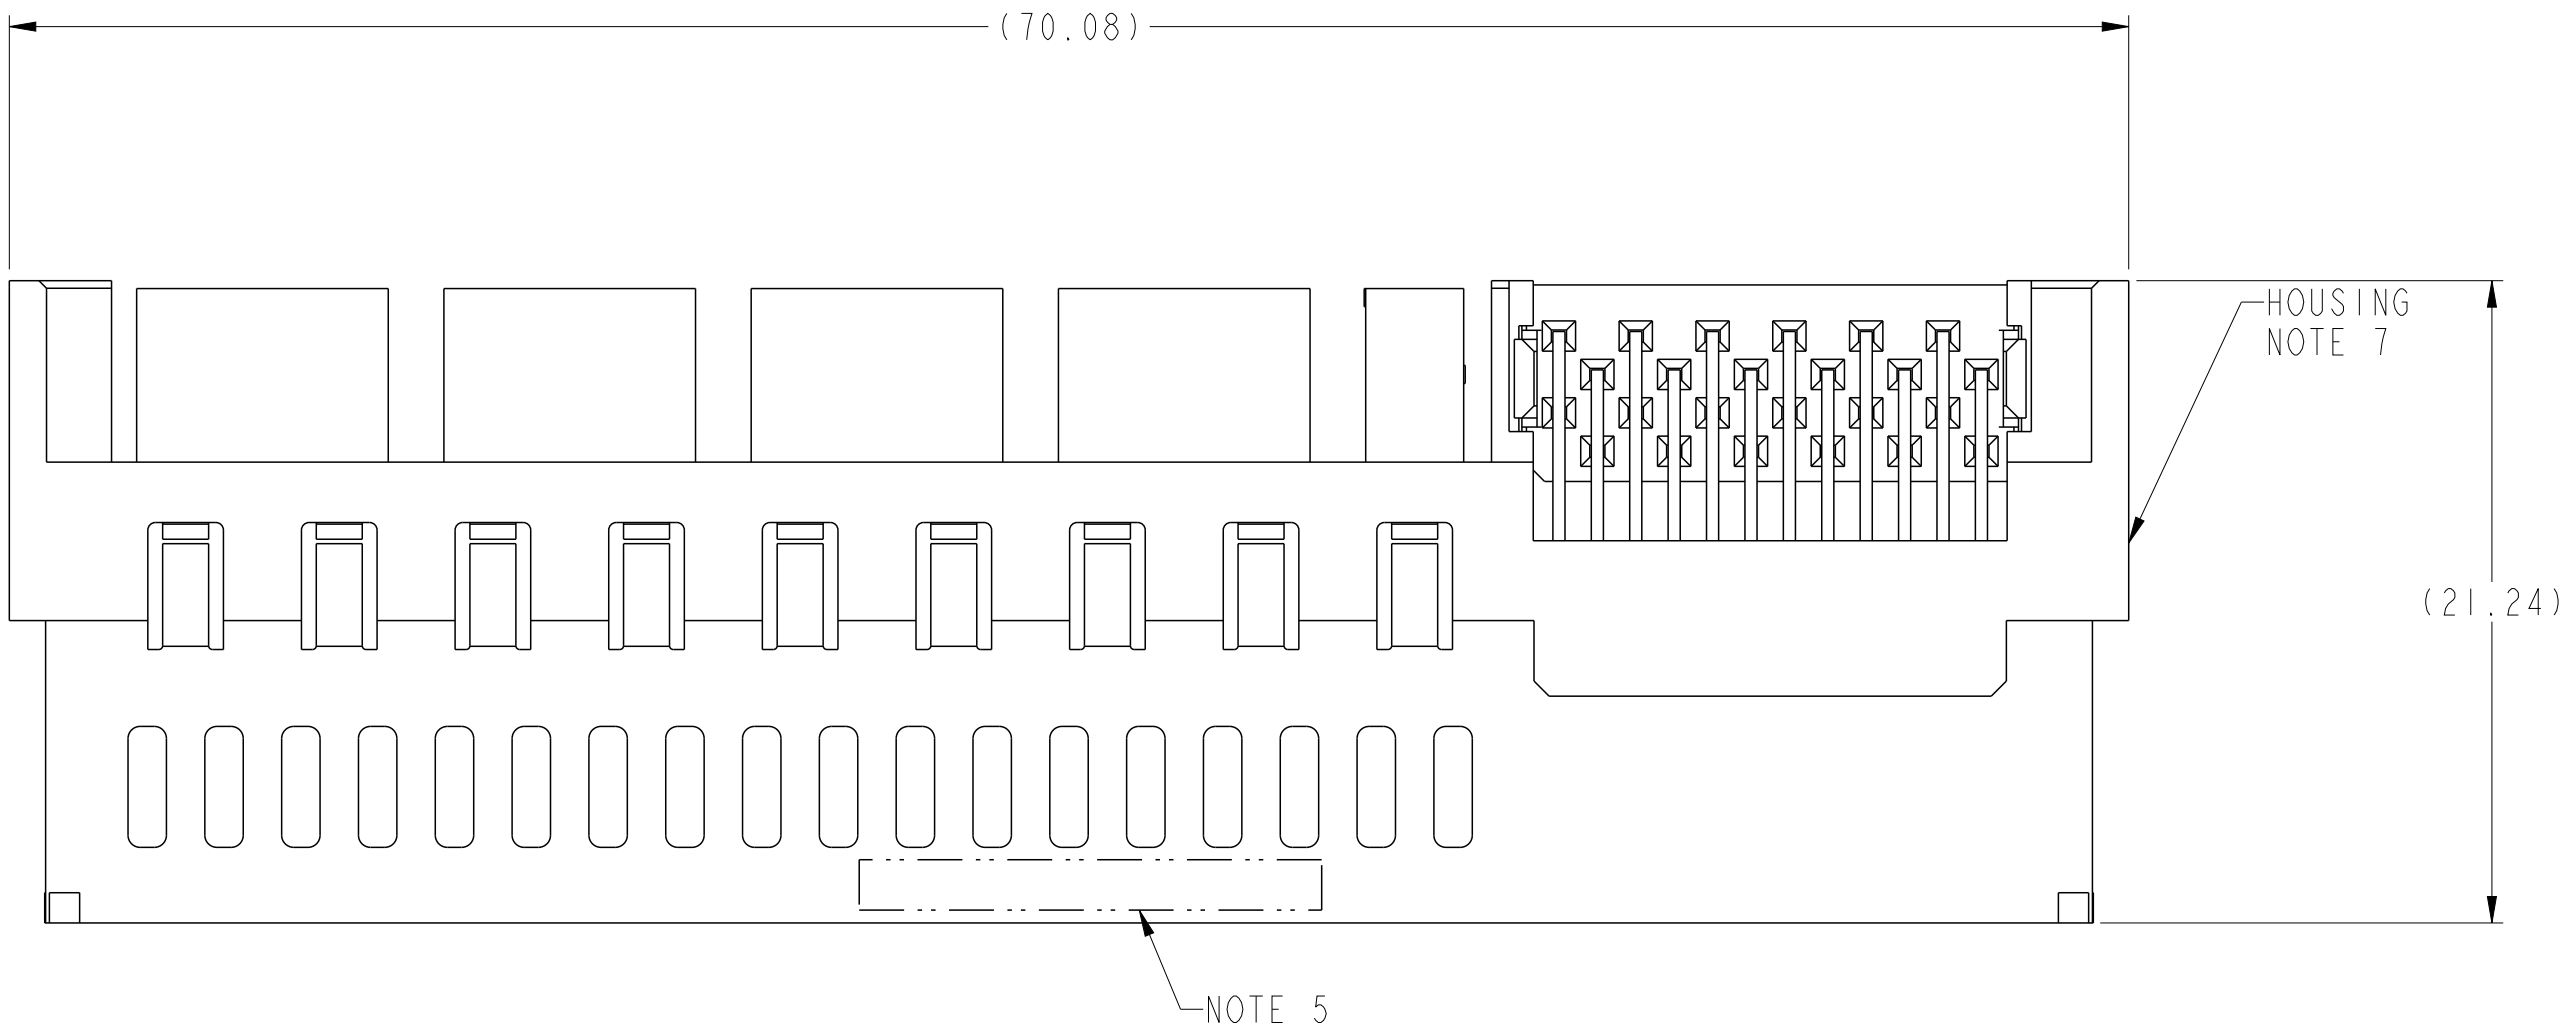


SECTION C-C

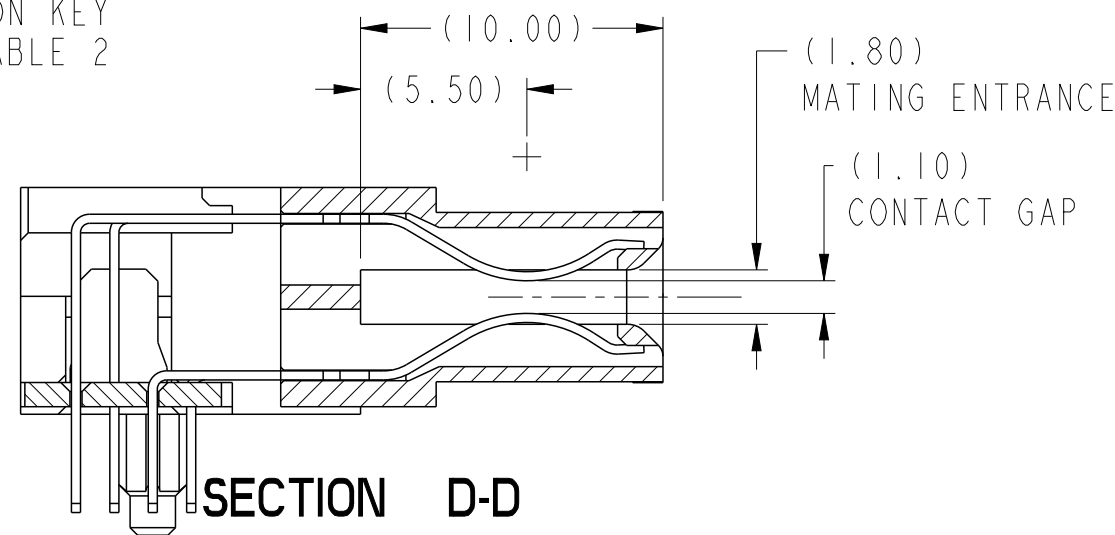


SECTION D-D

spec ref		-		dr		Chris Gieski		2010/08/27		projection						size		A2		scale		4:1	
tolerance std		-		eng		De-Ming Lu		2014/06/05						ecn no		ELX-DG-17838-1							
ASME Y14.5		TOLERANCES UNLESS OTHERWISE SPECIFIED		chr		-		-						rel level		Released							
ASME Y14.5				appr		Pei-Ming Zheng		2014/06/05		product family		HPCE											
surface				linear				title		R/A RECT (36P-24S)		dwg no		10115859						rev		D	
ASME Y14.5				angular		0°		±°		HIGH POWER CARD EDGE													
						www.fci.com		cat. no.		-		Product - Customer Drw		sheet 1 of 4									

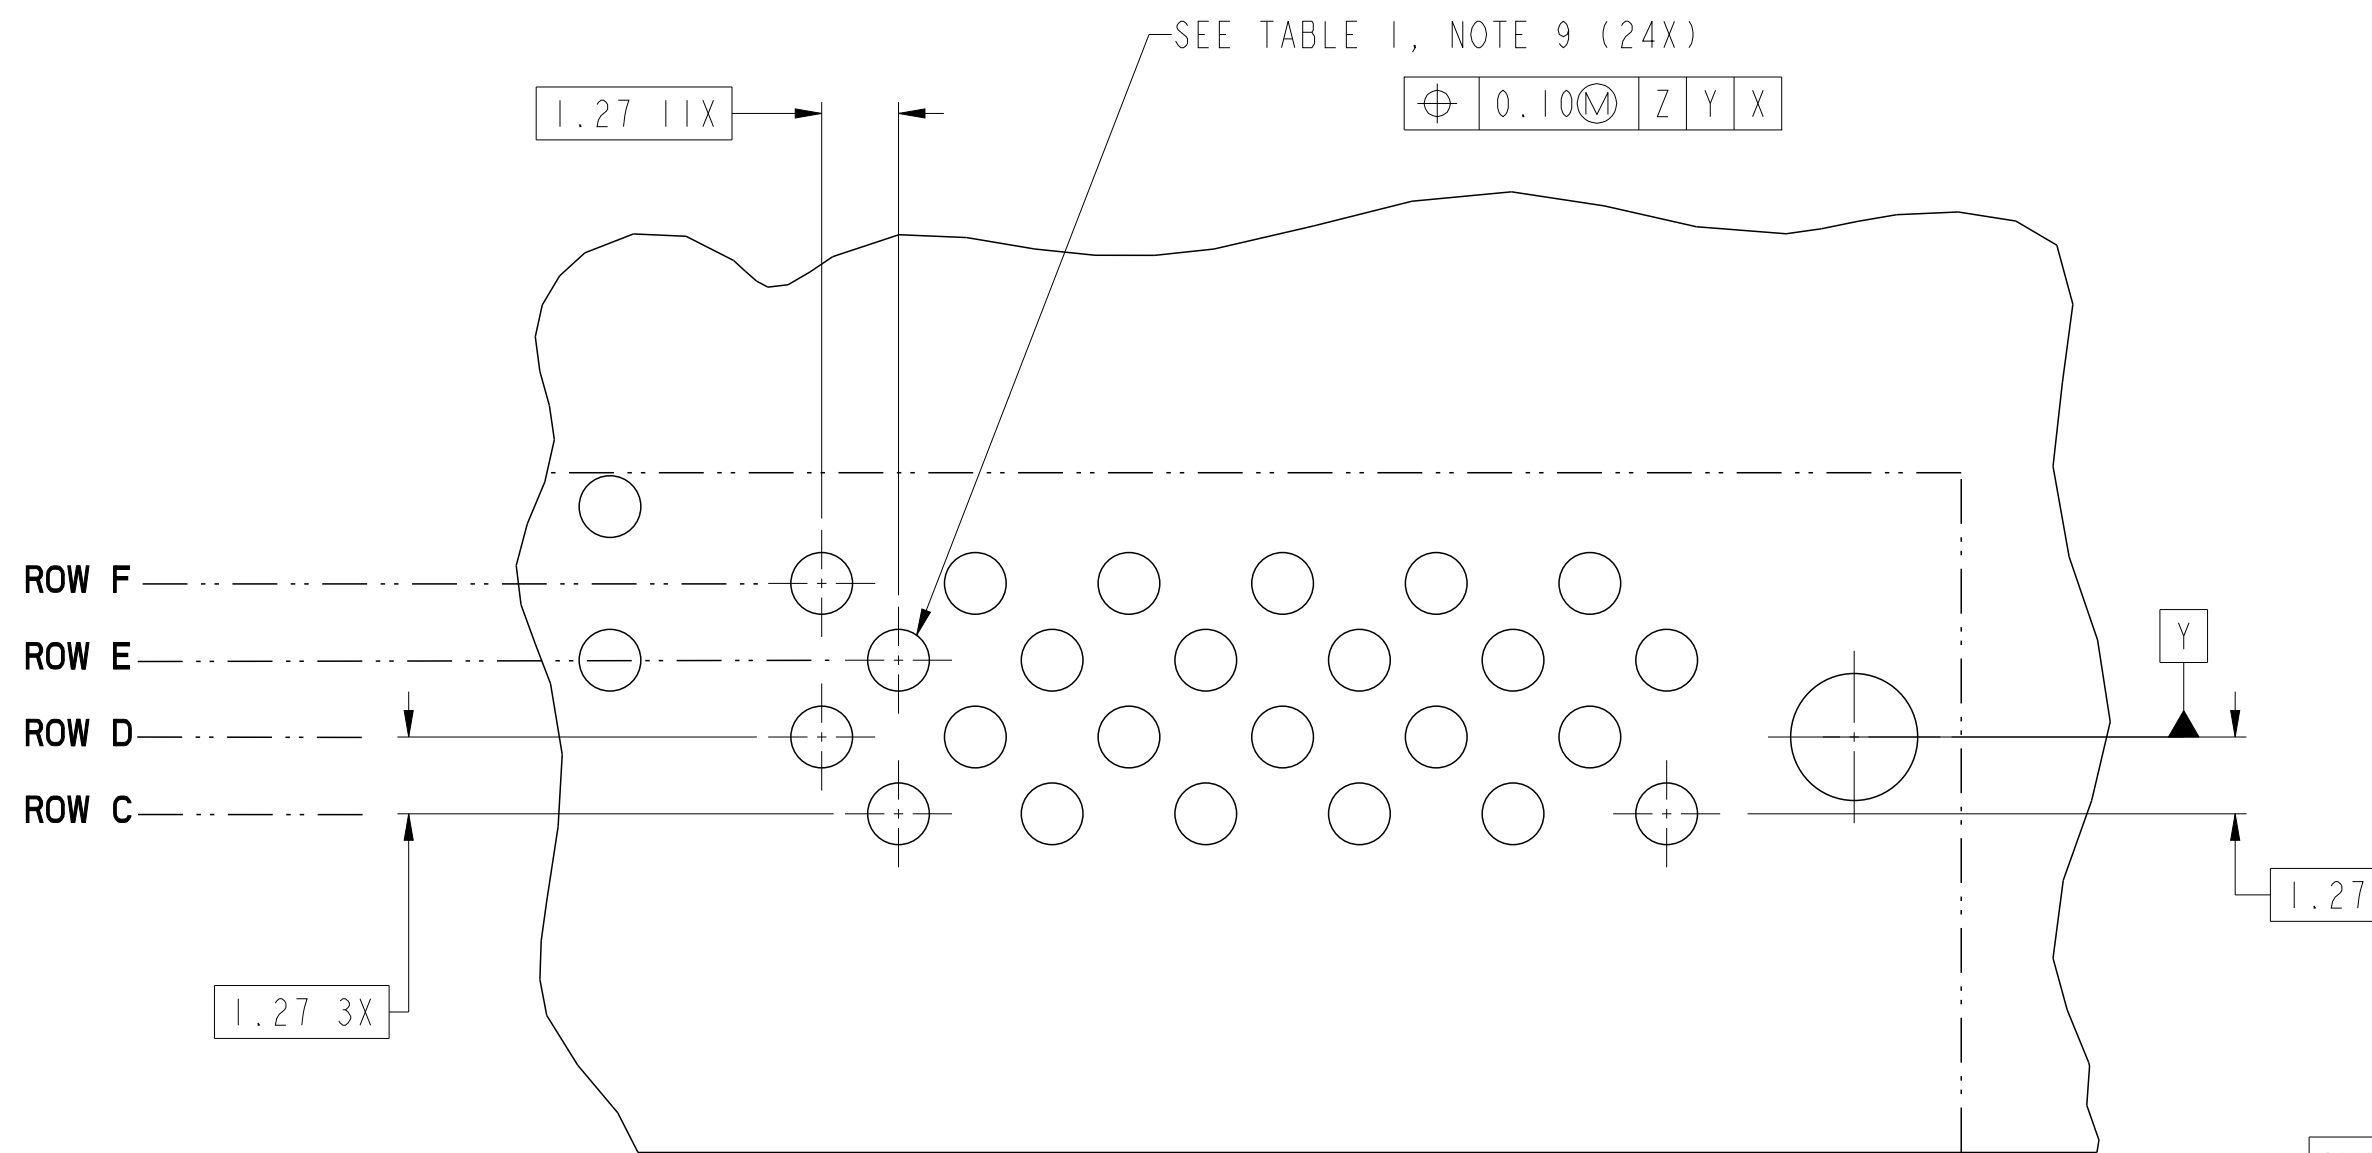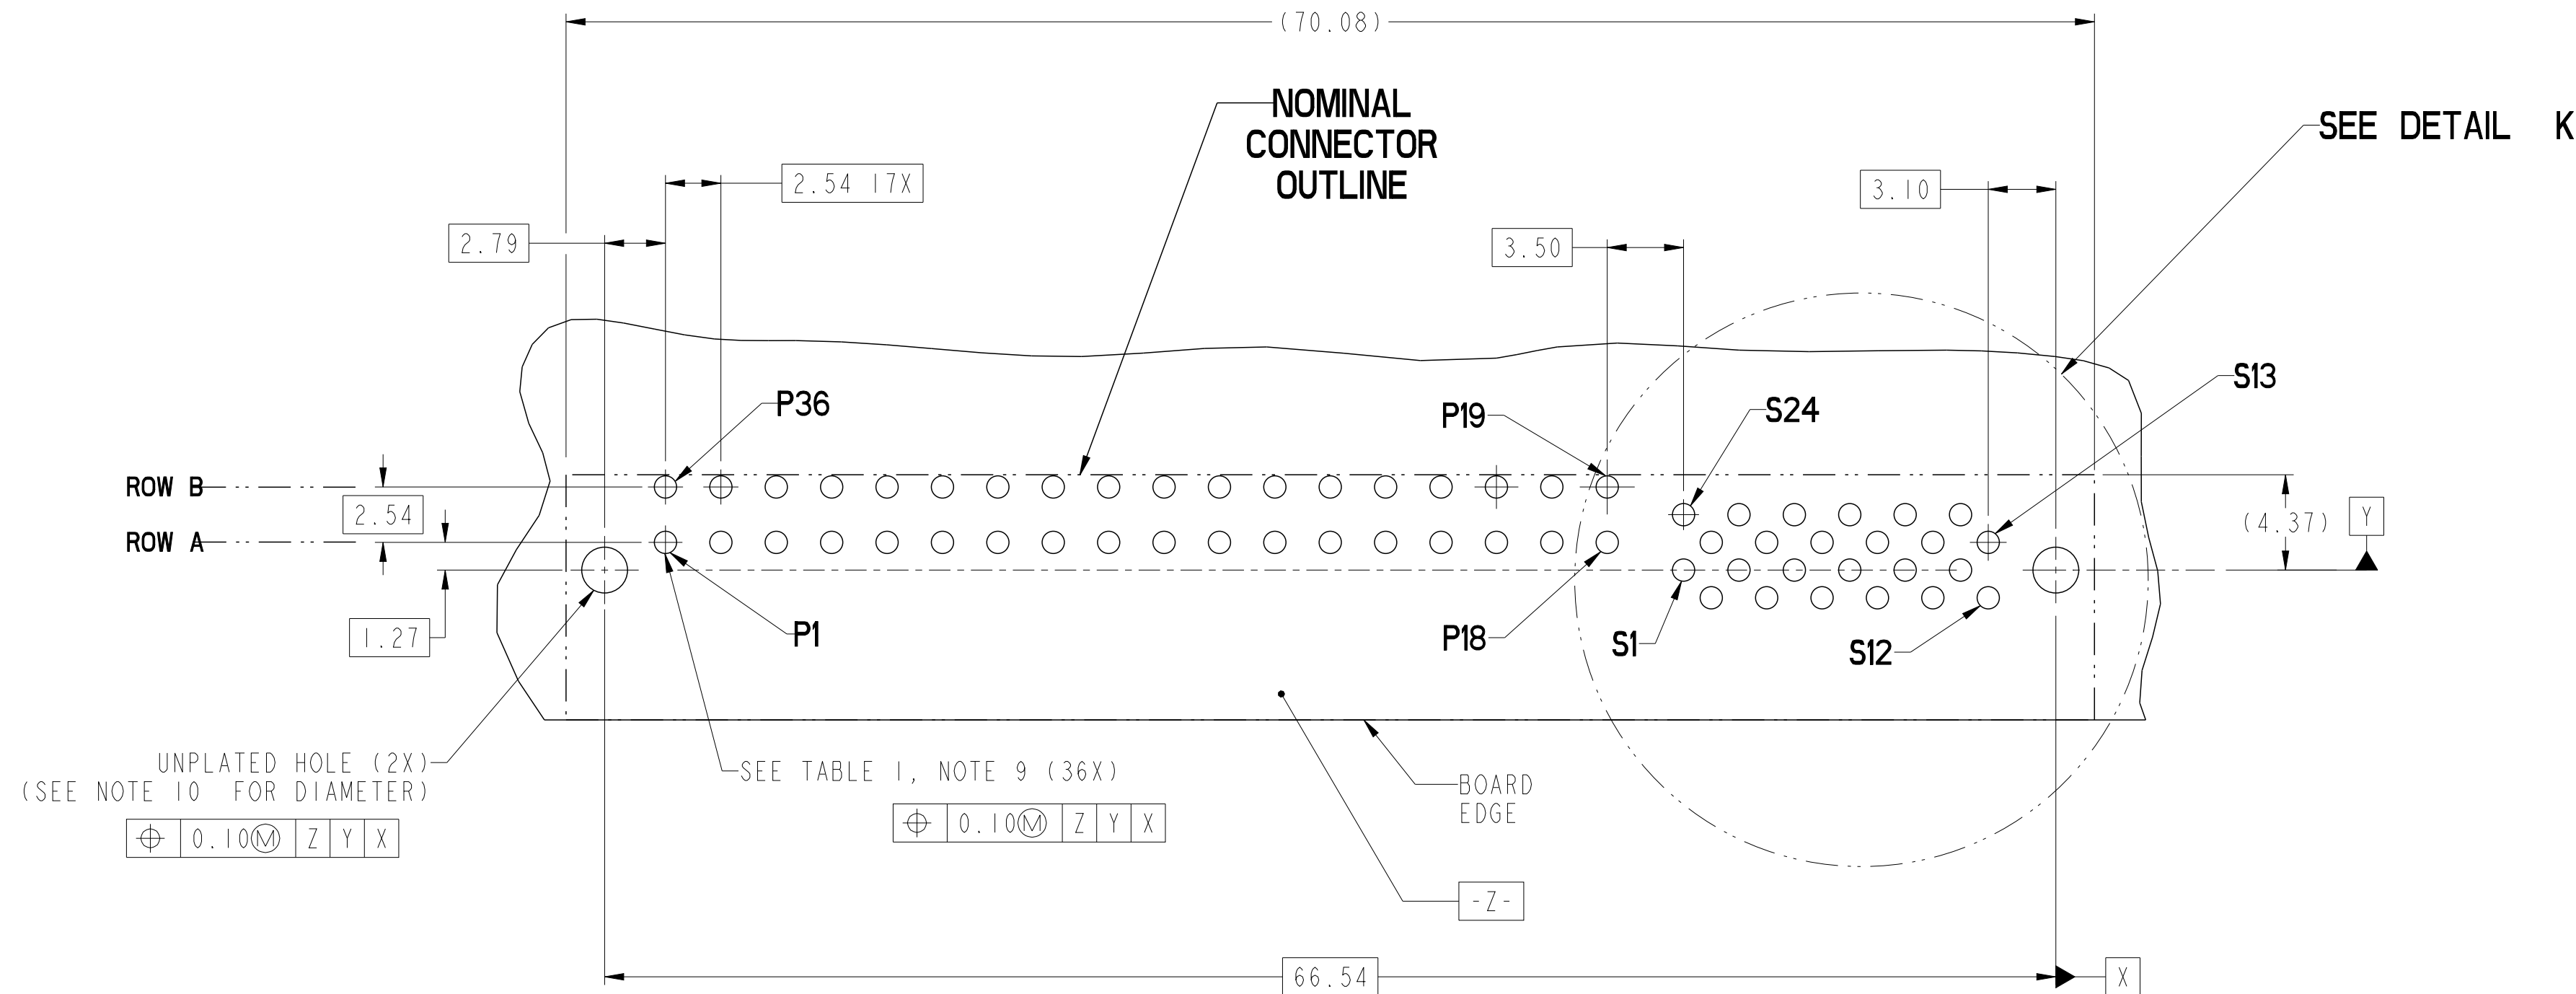


RECOMMENDED PCB LAYOUT VIEWED FROM CONNECTOR SIDE

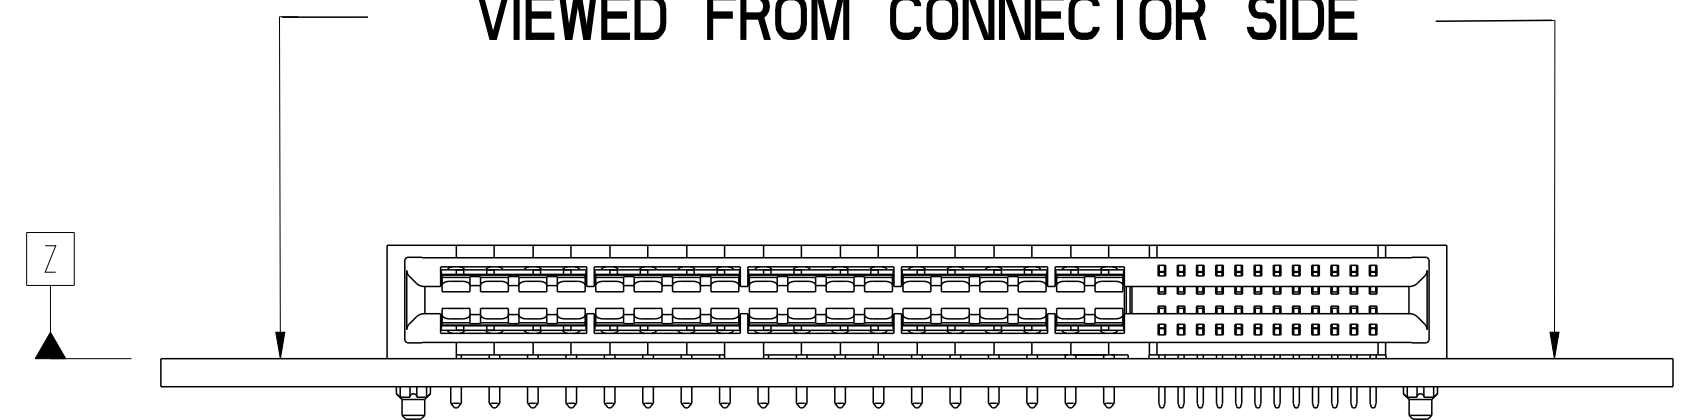

DETAIL K
SCALE 8:1

spec ref	-	dr	Chris Gieski	2010/08/27	projection	MM	size	A2	scale	4:1
tolerance std	-	eng	De-Ming Lu	2014/06/05		MM	ecn no	ELX-DG-17838-1	rel level	Released
ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED	chr	-	-						
surface	linear	appr	Pei-Ming Zheng	2014/06/05						
ASME Y14.5	angular	0°	±0.3	±0.10	±0.050	±0°	cat. no.	-	Product - Customer Drw	sheet 2 of 4
		www.fci.com		R/A RECT (36P-24S) HIGH POWER CARD EDGE		dwg no		10115859		rev
		PDS: Rev :D		STATUS:Released		Printed: Jun 06, 2014		D		

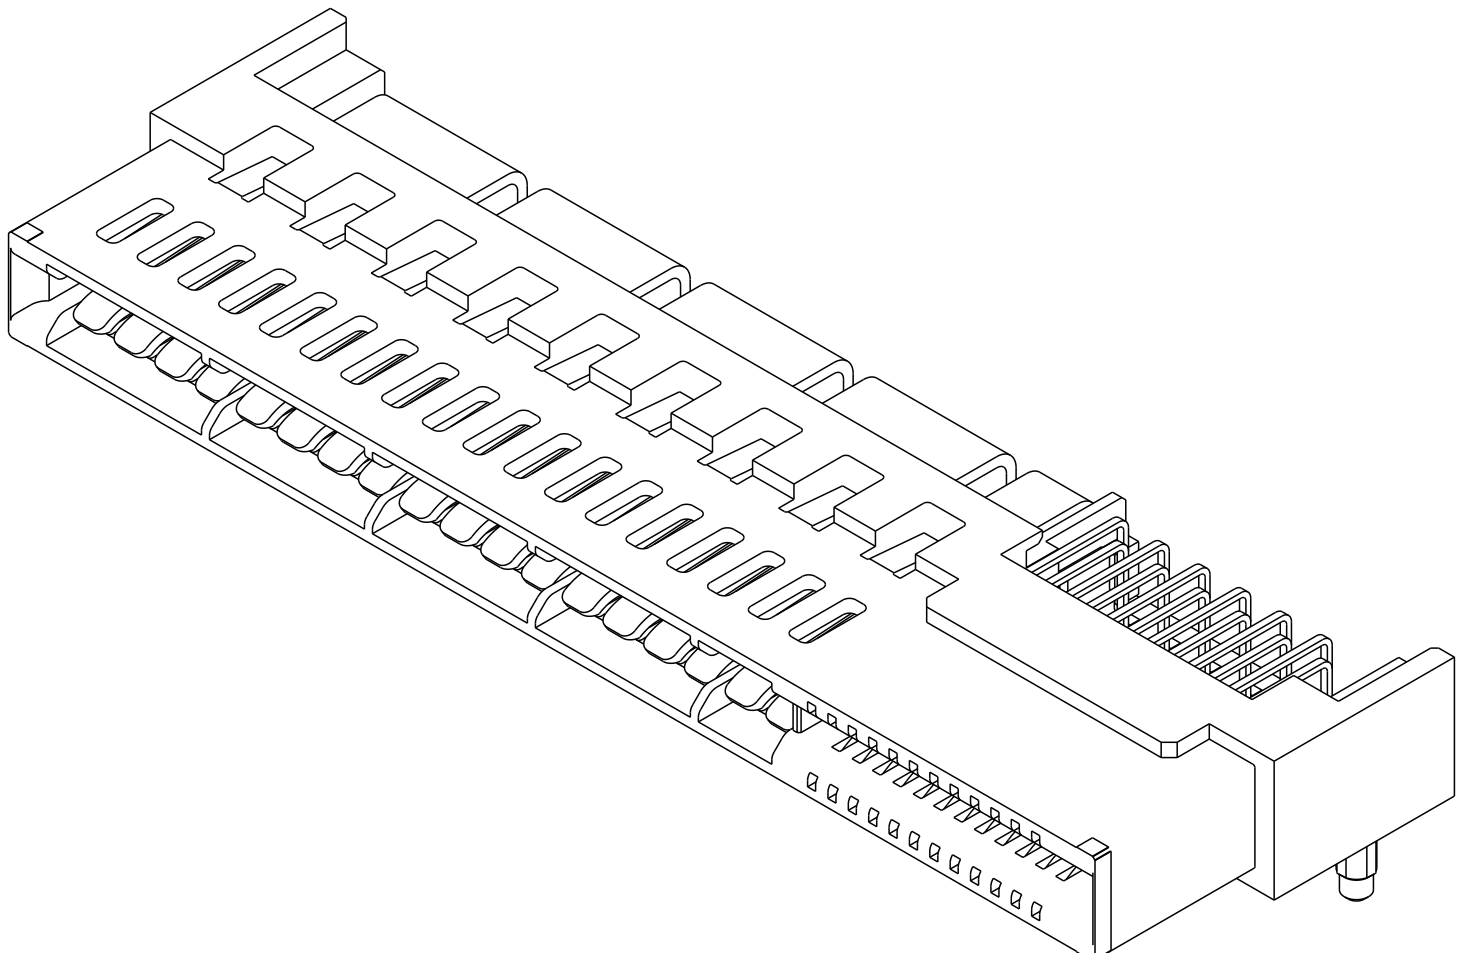1		2		3		4		5		6		7		8	
		HPCE PART NUMBER (TABLE 2)													
PART NUMBER		TAIL TYPE	HOLD-DOWN OPTION	ORIENTATION KEY	DIM "A" TYPICAL TAIL LENGTH										
10115859-001LF		SOLDER TAIL	NO	YES	3.25±0.25										
10115859-002LF				NO											
10115859-003LF			YES	YES											
10115859-004LF				NO											
10115859-005LF			NO	YES	4.05±0.25										
10115859-006LF				NO											
10115859-007LF			YES	YES											
10115859-008LF				NO											
10115859-009LF			NO	YES	4.85±0.25										
10115859-010LF				NO											
10115859-011LF			YES	YES											
10115859-012LF				NO											
10115859-013LF			NO	YES	2.60±0.25										
10115859-014LF				NO											
10115859-015LF			YES	YES											
10115859-016LF				NO											
										NOTES: 1. CONNECTOR MATERIALS: HOUSING: HIGH TEMPERATURE THERMAL PLASTIC, BLACK UL 94V-0 COMPLIANT CONTACTS: HIGH PERFORMANCE COPPER ALLOY. 2. CONTACT FINISH REF. GS-12-604 SECTION 5.2. 3. PRODUCT SPECIFICATION: GS-12-604. 4. APPLICATION SPECIFICATION: GS-20-128. 5. PRODUCT MARKING (FCI - PART NUMBER & DATE CODE) ON HOUSING IN AREA SHOWN. 6. PACKAGING MEETS FCI SPECIFICATION GS-14-937. 7. HOUSING COMPONENT WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 60 SECONDS IN A CONVECTION, INFRA-RED, OR VAPOR PHASE REFLOW OVEN. 8. COPPER PLATING THICKNESS IN CENTER OF VIA-HOLE CAN BE NO MORE THAN 0.003 LESS THAN OTHER AREAS. 9. ALL HOLE SIZES ARE FINISHED HOLE SIZES. 10. MOUNTING HOLES ARE UNPLATED Ø 2.10 +/- 0.1 FOR SOLDER TAILS 11. A  SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.					

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru