



**CxR type, SSOP package,  
60 V, 80 V and 100 V  
load voltage**

**PhotoMOS®  
RF SSOP 1 Form A CxR  
(AQY22000V)**

New

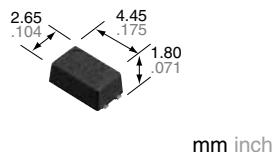

RoHS compliant

## FEATURES

### 1. Miniature SSOP package

(Compared to SOP 4-pin models, volume ratio can be reduced by approximately 53%.)

### 2. Load voltage: 60 V, 80 V and 100 V

### 3. Low CxR

Low on resistance and low output capacitance available

- 60 V load voltage

Output capacitance: 27 pF (typical), On resistance: 0.8Ω (typical)

- 80 V load voltage

Output capacitance: 4.5 pF (typical), On resistance: 10.5Ω (typical)

- 100 V load voltage

Output capacitance: 5.8 pF (typical), On resistance: 8.8Ω (typical)

### 4. Turn on time

80 V and 100 V load voltage type: 0.05 ms (typical)

## TYPICAL APPLICATIONS

### 1. Measuring and testing equipment

Semiconductor testing equipment, Probe cards, Datalogger, Board tester and other testing equipment

### 2. Telecommunication and broadcasting equipment

### 3. Medical equipment

Ultrasonic wave diagnostic machine

### 4. Multi-point recorder

Warping, Thermo couple, etc.

\*Does not support automotive applications.

## TYPES

Type	Output rating* <sup>1</sup>		Part No. (Tape and reel packing style)* <sup>2</sup>		Packing quantity in the tape and reel
	Load voltage	Load current	Picked from the 1 and 4-pin side	Picked from the 2 and 3-pin side	
AC/DC dual use	60 V <i>New</i>	400 mA	AQY222R2VY	AQY222R2VW	3,500 pcs.
	80 V	120 mA	AQY225R2VY	AQY225R2VW	
	100 V <i>New</i>	120 mA	AQY225R3VY	AQY225R3VW	

Notes: \*1. Indicate the peak AC and DC values.

\*2. Only tape and reel package is available. Packing quantity of 1,000 pieces is possible. Please consult us.

For space reasons, the three initial letters of the part number "AQY", the package (SSOP) indication "V", and the packaging style "Y" or "W" are not marked on the device.

**RATING**

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item	Symbol	AQY222R2V	AQY225R2V	AQY225R3V	Remarks
Input side	LED forward current	I <sub>F</sub>	50 mA		
	LED reverse voltage	V <sub>R</sub>	5 V		
	Peak forward current	I <sub>FP</sub>	1 A		f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P <sub>in</sub>	75 mW		
Output side	Load voltage (peak AC)	V <sub>L</sub>	60 V	80 V	100 V
	Continuous load current	I <sub>L</sub>	0.4 A	0.12 A	Peak AC, DC
	Peak load current	I <sub>peak</sub>	1.2 A	0.3 A	100 ms (1shot), V <sub>L</sub> = DC
	Power dissipation	P <sub>out</sub>	250 mW		
Total power dissipation	P <sub>T</sub>		300 mW		
I/O isolation voltage	V <sub>iso</sub>		1,500 V AC		
Operating temperature	T <sub>opr</sub>		-40°C to +85°C -40°F to +185°F		Non-condensing at low temperatures
Storage temperature	T <sub>stg</sub>		-40°C to +100°C -40°F to +212°F		

2. Electrical characteristics (Ambient temperature: 25°C 77°F)


Item	Symbol	AQY222R2V	AQY225R2V	AQY225R3V	Condition
Input	LED operate current	I <sub>fon</sub>	0.5 mA		
			3.0 mA		AQY222R2V: I <sub>L</sub> = 400 mA AQY225R2V: I <sub>L</sub> = 80 mA AQY225R3V: I <sub>L</sub> = 80 mA
	LED turn off current	I <sub>foff</sub>	0.1 mA		
			0.45 mA		
	LED dropout voltage	V <sub>F</sub>	1.32 V (1.14 V at I <sub>F</sub> = 5 mA)		
			1.5 V		I <sub>F</sub> = 50 mA
Output	On resistance	R <sub>on</sub>	0.8Ω	10.5Ω	8.8Ω
			1.25Ω	15Ω	14Ω
	Output capacitance	C <sub>out</sub>	27 pF	4.5 pF	5.8 pF
			40 pF	6 pF	8 pF
	Off state leakage current	I <sub>Leak</sub>	—	0.01 nA	
			—	10 nA*	I <sub>F</sub> = 0 mA, V <sub>L</sub> = Max.
Transfer characteristics	Turn on time**	T <sub>on</sub>	0.15 ms	0.05 ms	
			—	0.5 ms	AQY222R2V: I <sub>F</sub> = 5 mA, V <sub>L</sub> = 10 V, R <sub>L</sub> = 100Ω AQY225R2V: I <sub>F</sub> = 5 mA, V <sub>L</sub> = 10 V, R <sub>L</sub> = 125Ω AQY225R3V: I <sub>F</sub> = 5 mA, V <sub>L</sub> = 10 V, R <sub>L</sub> = 125Ω
	Turn off time**	T <sub>off</sub>	0.08 ms	0.05 ms	
			—	0.2 ms	
	I/O capacitance	C <sub>iso</sub>	0.8 pF		f = 1 MHz, V <sub>B</sub> = 0 V
			1.5 pF		
	Initial I/O isolation resistance	R <sub>iso</sub>		1,000 MΩ	500 V DC

Notes: 1. Please refer to the "Schematic and Wiring Diagrams" for connection method.

2. Variation possible through combinations of output capacitance and on resistance. For more information, please contact our sales office in your area.

\*Available as custom orders (1 nA or less)

\*\*Turn on/Turn off time

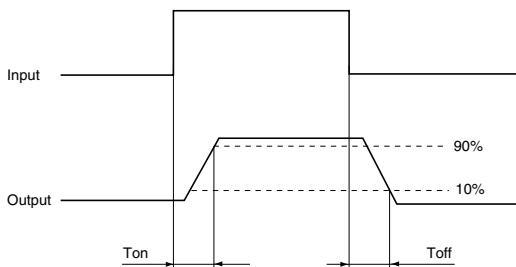**RECOMMENDED OPERATING CONDITIONS**

Please obey the following conditions to ensure proper this device operation and resetting.


Item	Symbol	Recommended value	Unit
Input LED forward current	I <sub>F</sub>	5	mA

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

## REFERENCE DATA


1.-(1) Load current vs. ambient temperature characteristics  
Allowable ambient temperature:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$   
 $-40^{\circ}\text{F}$  to  $+185^{\circ}\text{F}$

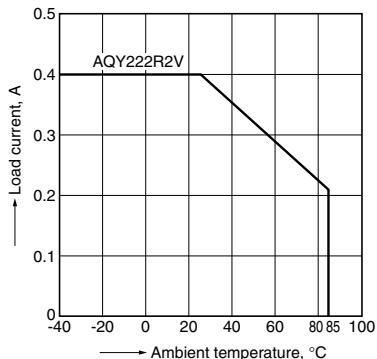


1.- (2) Load current vs. ambient temperature characteristics  
Allowable ambient temperature:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$   
 $-40^{\circ}\text{F}$  to  $+185^{\circ}\text{F}$

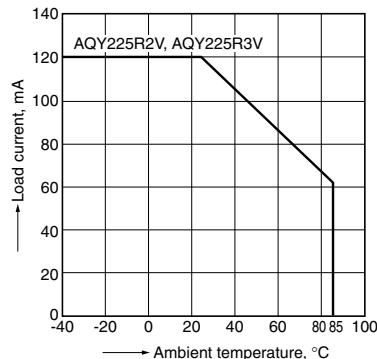


2.- (1) On resistance vs. ambient temperature characteristics  
Measured portion: between terminals 3 and 4  
LED current: 5 mA; Load voltage: 10V (DC)  
Continuous load current: Max. (DC)

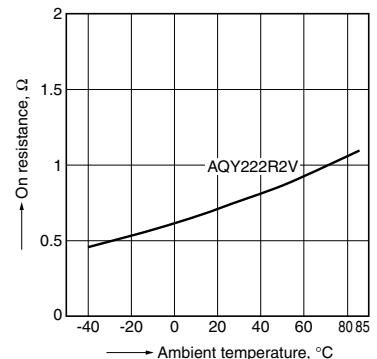


2.- (2) On resistance vs. ambient temperature characteristics  
Measured portion: between terminals 3 and 4;  
LED current: 5 mA; Load voltage: 10V (DC);  
Continuous load current: 80mA (DC)

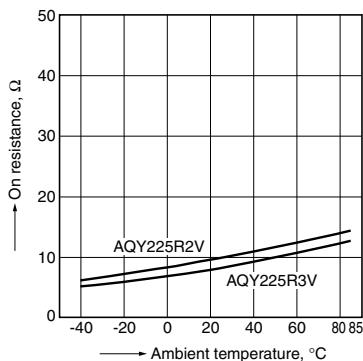


3.- (1) Turn on time vs. ambient temperature characteristics  
LED current: 5 mA; Load voltage: 10V (DC);  
Continuous load current: 100mA (DC)

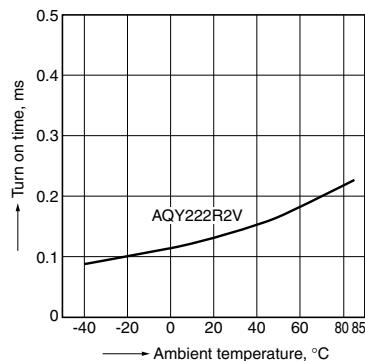


3.- (2) Turn on time vs. ambient temperature characteristics  
LED current: 5 mA; Load voltage: 10V (DC);  
Continuous load current: 80mA (DC)

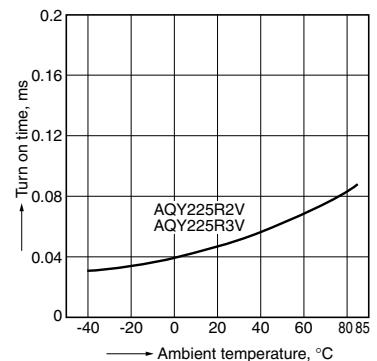


4.- (1) Turn off time vs. ambient temperature characteristics  
LED current: 5 mA; Load voltage: 10V (DC);  
Continuous load current: 100mA (DC)

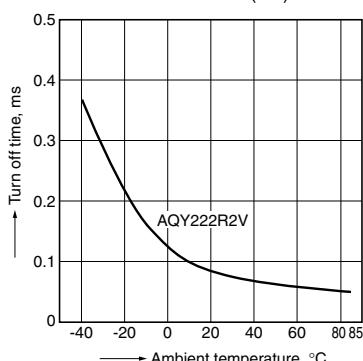

4.- (2) Turn off time vs. ambient temperature characteristics  
LED current: 5 mA; Load voltage: 10V (DC);  
Continuous load current: 80mA (DC)

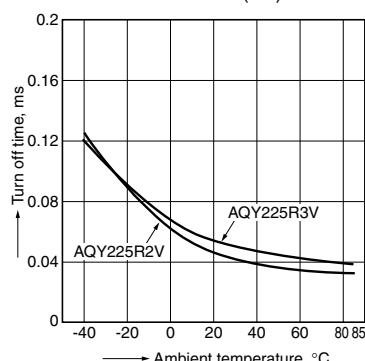


5.- (1) LED operate current vs. ambient temperature characteristics  
Load voltage: 10V (DC);  
Continuous load current: 400mA (DC)

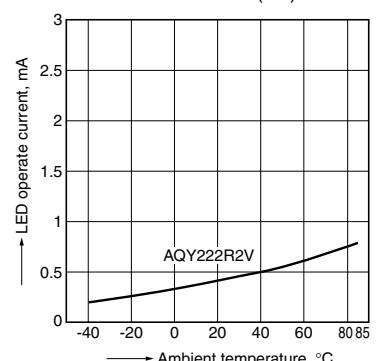

# RF SSOP 1 Form A CxR (AQY22000V)


## 5.- (2) LED operate current vs. ambient temperature characteristics

Load voltage: 10V (DC);  
Continuous load current: 80mA (DC)

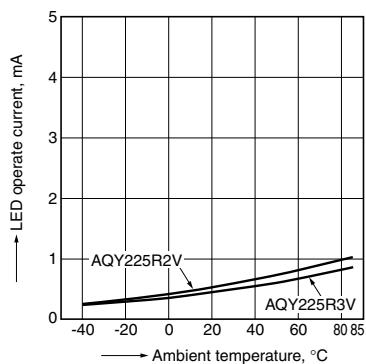


## 7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

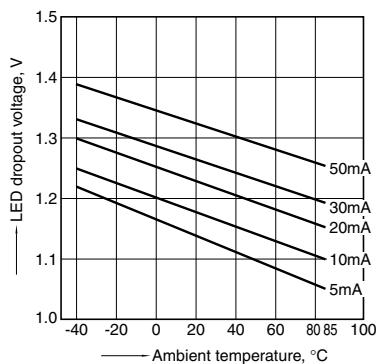


## 9.- (1) Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 3 and 4;  
Ambient temperature: 25°C 77°F

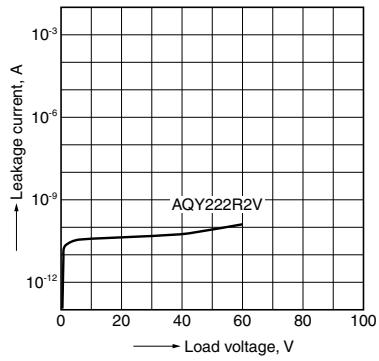


## 10.- (2) Turn on time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4;  
Load voltage: 10V (DC); Continuous load current: 80mA (DC); Ambient temperature: 25°C 77°F

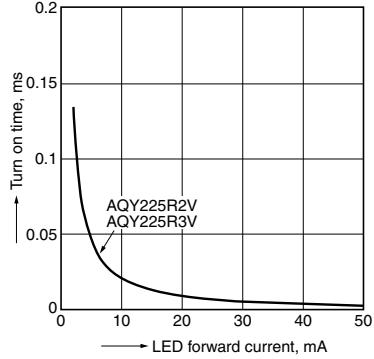


## 11.- (1) Turn off time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4;  
Load voltage: 10V (DC); Continuous load current: 100mA (DC); Ambient temperature: 25°C 77°F

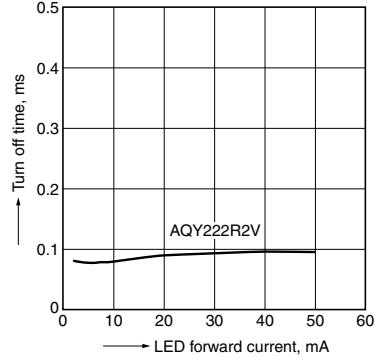


**12.-(1) Output capacitance vs. applied voltage characteristics**

Measured portion: between terminals 3 and 4;  
Measurement signal: 1 MHz;  
Ambient temperature: 25°C 77°F

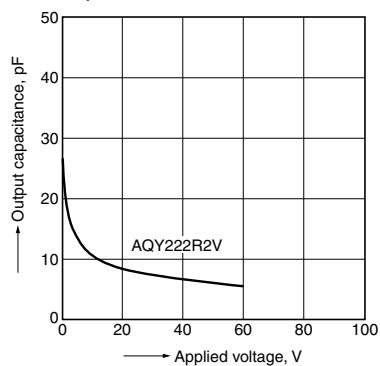

**12.-(2) Output capacitance vs. applied voltage characteristics**

Measured portion: between terminals 3 and 4;  
Measurement signal: 1 MHz (30m Vrms);  
Ambient temperature: 25°C 77°F

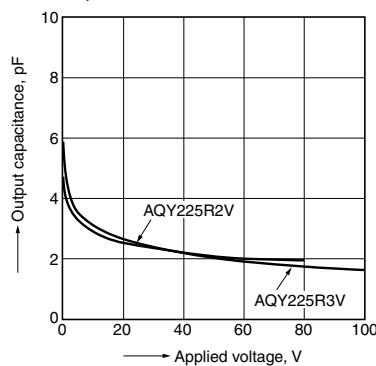

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: org@lifeelectronics.ru