

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION SEP ,2005.

© COPYRIGHT 2005 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
E	B		C	ECR-05-011505	21SEP05	JMS FWK

NOTES:


- 1 SINGLE PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 2 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 3 Ag PLATING
4. HANDTOOL: 9-1478239-0
5. ELECTRICAL CHARACTERISTICS
FREQUENCY RANGE: DC - 11 GHz
NOMINAL IMPEDANCE: 50 Ohm
INSULATION RESISTANCE: 5000 MOhm
WORKING VOLTAGE: 1000 Volts RMS at Sea Level
DIELECTRIC WITHSTAND VOLTAGE: 2500 Volts RMS Max
CONTACT RESISTANCE:
CENTRE CONTACT: 1.00 mOhm Max
OUTER CONTACT: 1.00 mOhm Max
VSWR @ 4GHz: 1.30:1 Max
INSERTION LOSS dB @ x 4 GHz: 0.30 Max
6. MECHANICAL CHARACTERISTICS
COUPLING NUT RETENTION FORCE: N/A
CABLE RETENTION FORCE: 350 Min
DURABILITY: 500 Cycles Min
7. ENVIRONMENTAL CHARACTERISTICS
OPERATING TEMPERATURE: -65 to +165 DegC

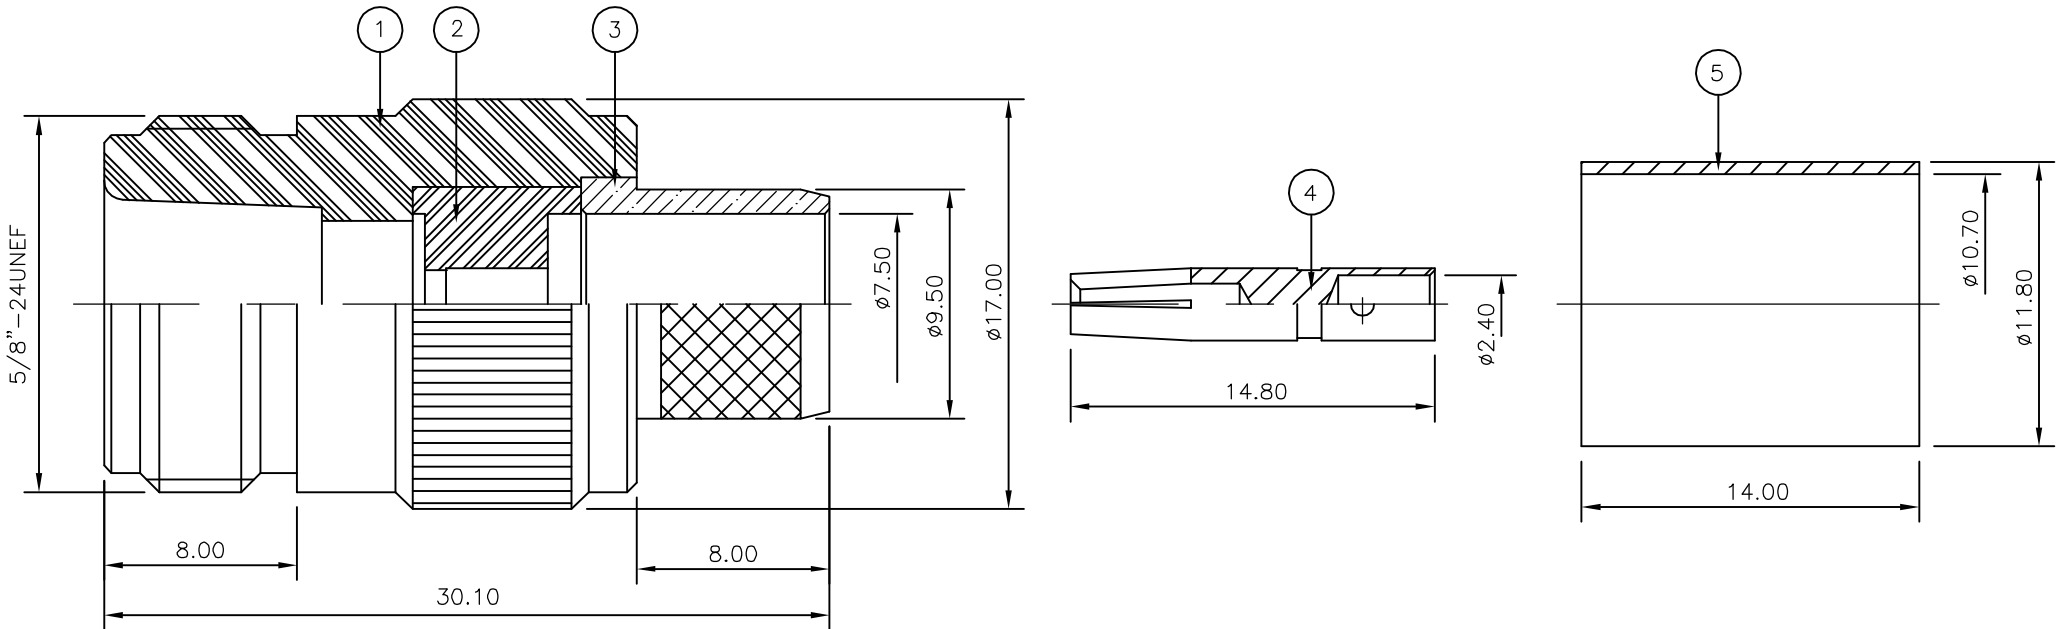


RECOMMENDED
CENTRE CONTACT
A/F HEX



RECOMMENDED
CRIMP SLEEVE
A/F HEX




RECOMMENDED
CABLE STRIPPING DIM'S

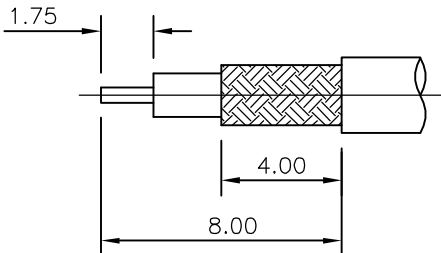

		1	1	BRASS	3	CRIMP SLEEVE	5
		1	1	BERYLLIUM COPPER	3	SOCKET	4
		1	1	BRASS	3	BODY	3
		1	1	PTFE		INSULATOR	2
		1	1	BRASS	3	BODY	1
		6--0	1--0	MATERIAL		DESCRIPTION	ITEM
		3	3				
QUANTITY PER ASSY				PARTS LIST			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm



MATERIAL
SEE TABLE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH ± -

SEE TABLE

DWN	J.SANDWELL	21SEP05
CHK	S.PARLOW	21SEP05
APVD	F.WHEELER-KING	21SEP05
PRODUCT SPEC	108-3435	
APPLICATION SPEC	411-3247	
WEIGHT	-	

CUSTOMER DRAWING



Tyco Electronics Corporation
Bideford EX39 4HE

NAME
TYPE-N STRAIGHT JACK CRIMP 50 OHMS
PSF 1/4M, RG8A/U, 213/U, URM67, KX4

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1337414	-

SCALE NTS SHEET 1 OF 1 REV C

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru