



4

3

2

1




LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
DW			C5	REVISED PER E-17-008108	6JUN17	A.X H.W

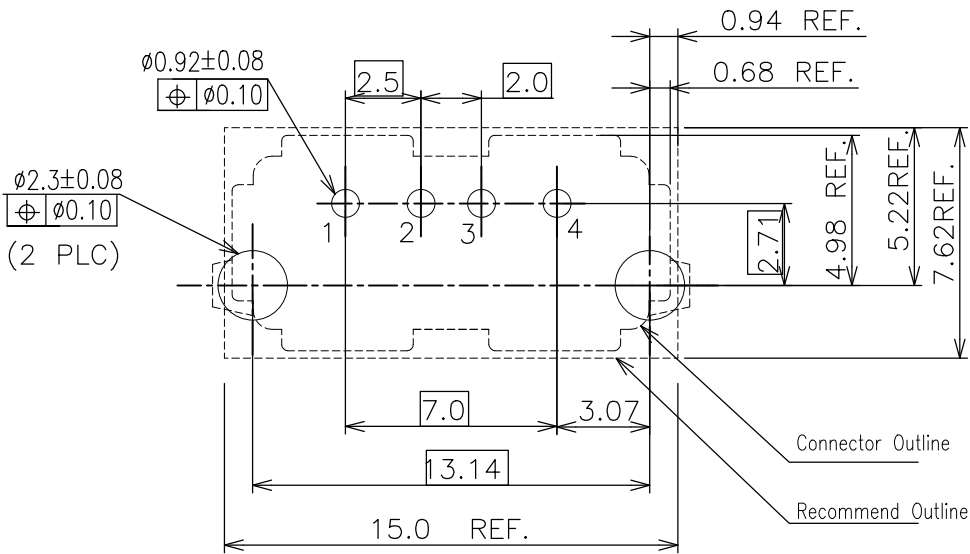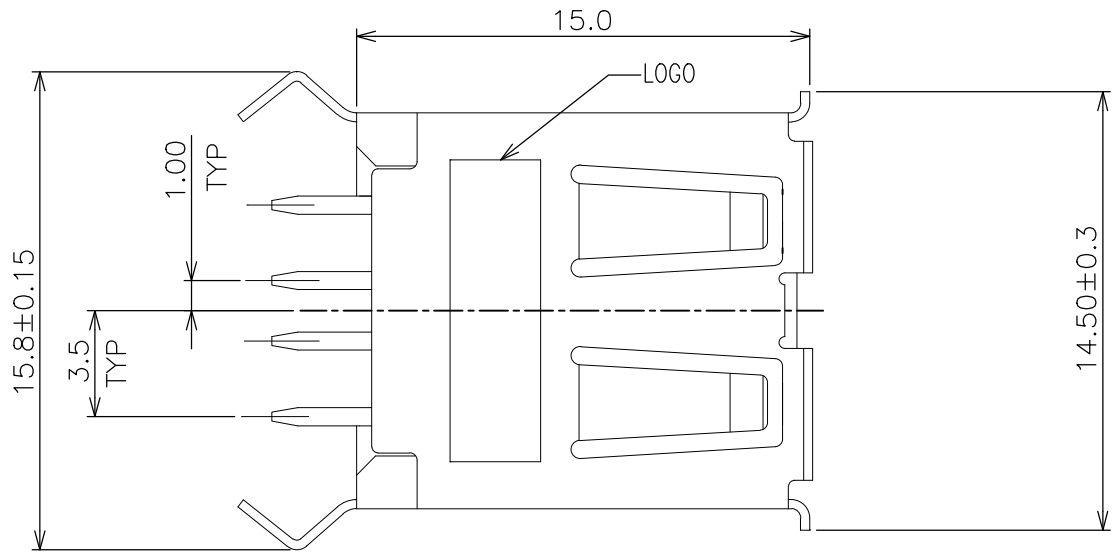



RECOMMENDED P.C.BOARD LAYOUT(T=1.6)

(TOP VIEW)(TOLERANCE:±0.05)

- NOTE:
1. MATERIAL:
- △ HOUSING: PBT(SOLDER CAPABLE,UL 94-V0,COLOR:SEE TABLE.)
 - △ HOUSING: PA9T(REFLOW CAPABLE,UL 94-V0,COLOR:SEE TABLE.)
 - CAP: LCP(REFLOW CAPABLE,UL 94-V0,COLOR:BLACK.)
 - BACK STOPPER: PBT(SOLDER CAPABLE,UL 94-V0,COLOR:BLACK.)
 - CONTACT: PHOSPHOR BRONZE, THICKNESS =0.25mm.
 - SHIELD: BRASS, THICKNESS=0.30mm.
2. FINISH:
- CONTACT:GOLD FLASH OVER
 - 0.762um[30u"]MIN. PALLADIUM-NICKEL PLATED ON CONTACT
 - 2.54um[100u"]MIN. MATTE-TIN ON SOLDER TAILS,
 - 1.27um[50u"]MIN. NICKEL UNDERPLATED ALL OVER.
 - △ SHIELD: 2.54um [100u"] MIN. TIN PLATED OVER
 - 1.27um [50u"] MIN. NICKEL UNDERPLATED
 - △ SHIELD: 0.762-2.03um [30-80u"] SOLDERABLE NICKEL OVER 0.762-2.03um [30-80u"] COPPER

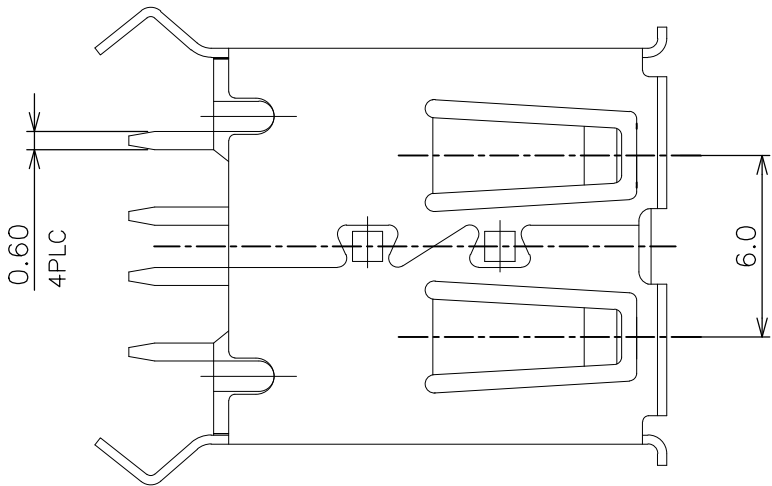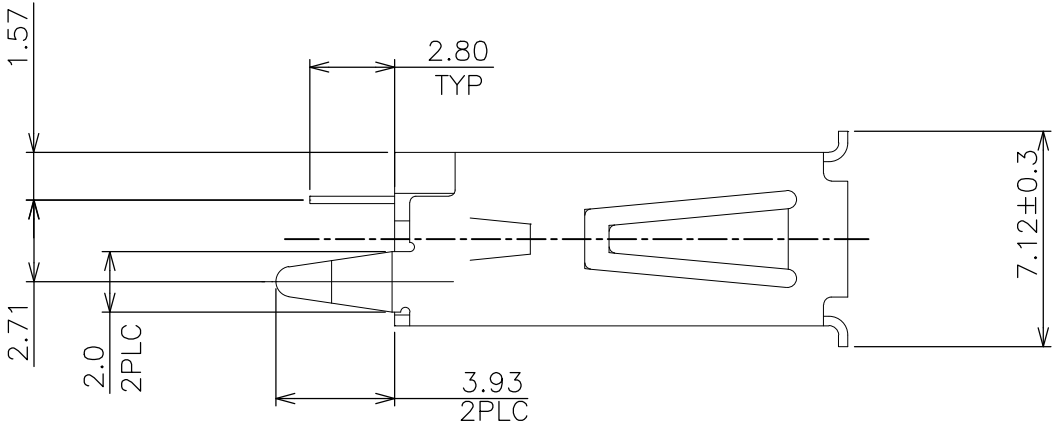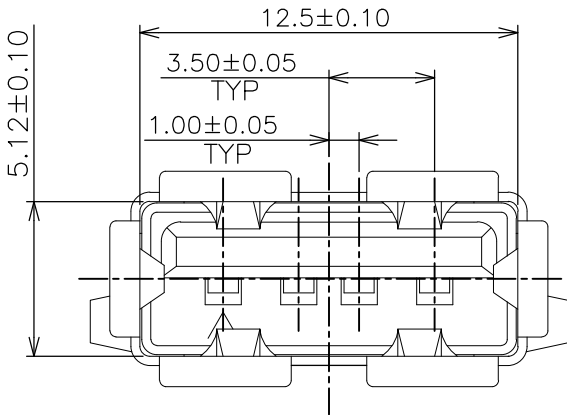

SEE SHEET 4	BLACK	1734366-5	△	△
SEE SHEET 5	BLACK	1734366-4	△	△
	BLUE	1734366-3		
SEE SHEET 4	WHITE	1734366-2		
	BLACK	1734366-1		
PACKING	HSG'S COLOR	PART NUMBER	HOUSING MATERIAL	SHIELD FINISH

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. CHIEN 19SEP2008		 TE Connectivity			
		CHK S. CHIEN 19SEP2008					
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0.38 1 PLC ± 0.25 2 PLC ± 0.13 3 PLC ± 0.05		APVD W.KODAMA 19SEP2008			
		PRODUCT SPEC 108-57547		NAME RECEPT ASSY,VERTICAL,4POSITION THRU-HOLE,TYPE A USB			
		APPLICATION SPEC 501-57635					
MATERIAL SEE NOTE		FINISH SEE NOTE		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
				A3	00779	Ⓒ-1734366	
				CUSTOMER DRAWING			
				SCALE		SHEET	REV
				—		1 OF 6	C5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

© COPYRIGHT



BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
DW		P	LTR	DESCRIPTION	DATE	APVD

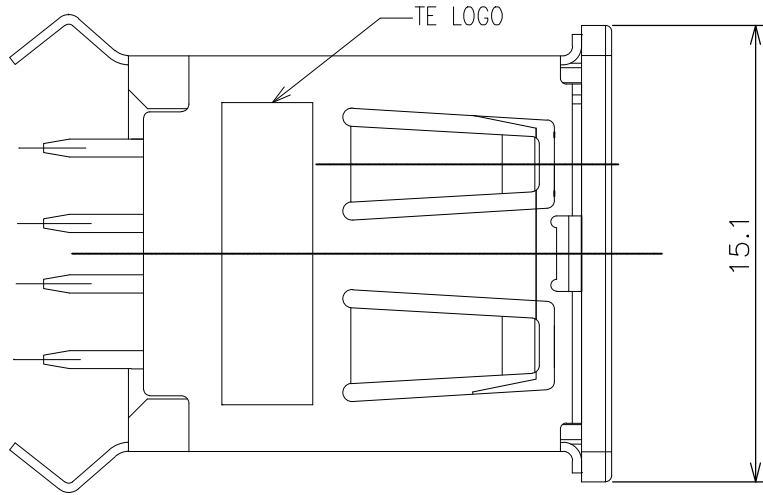

1734366-6 AS SHOW
OTHER DIMENSIONS ARE THE SAME AS SHEET1

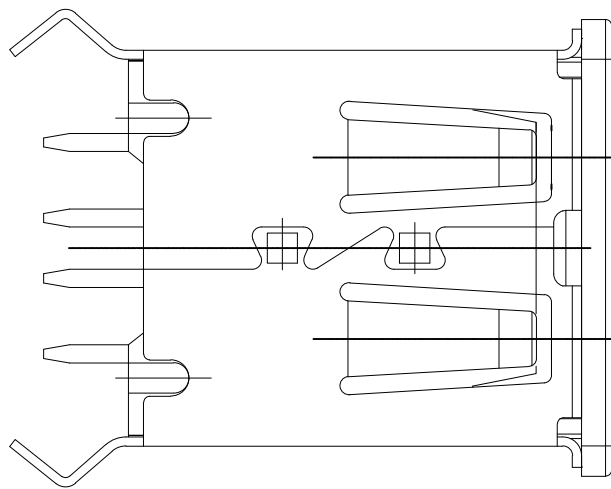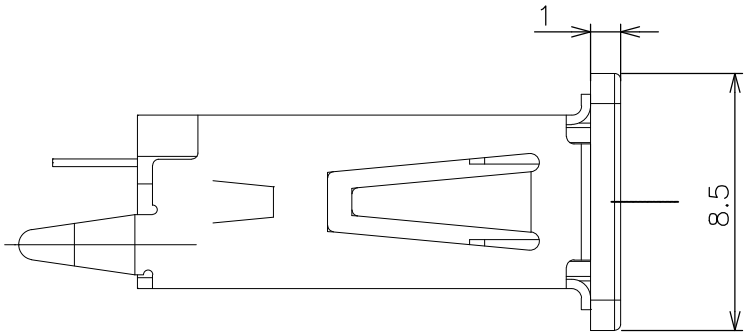

SEE SHEET 6	BLACK	1734366-6		
PACKING	HSG'S COLOR	PART NUMBER	HOUSING MATERIAL	SHIELD FINISH

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity		
		CHK			
		APVD	NAME		
		PRODUCT SPEC	RECEPT ASSY,VERTICAL,4POSITION THRU-HOLE,TYPE A USB		
		APPLICATION SPEC			
		WEIGHT	SIZE	CAGE CODE	DRAWING NO
		CUSTOMER DRAWING		A300779	C=1734366
				SCALE	SHEET
				—	2 OF 6
				REV	C5



4

3



2

1

LOC	DIST	REVISIONS				
DW		P	LTR	DESCRIPTION	DATE	APVD

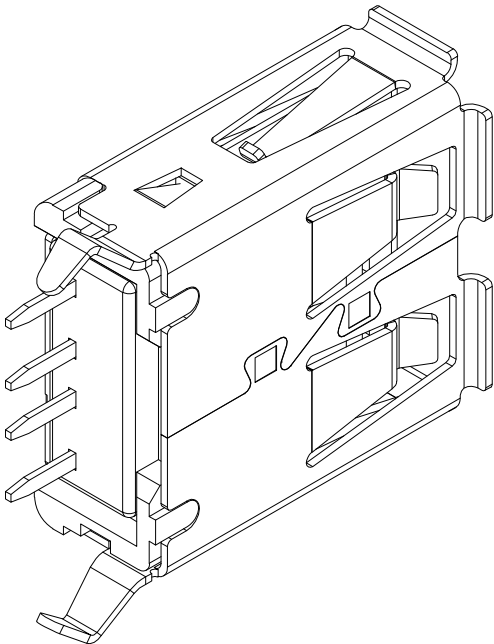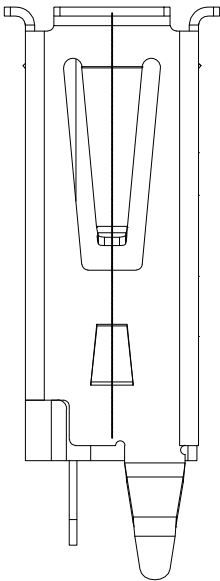



1734366-7 AS SHOW
OTHER DIMENSIONS ARE THE SAME AS SHEET1

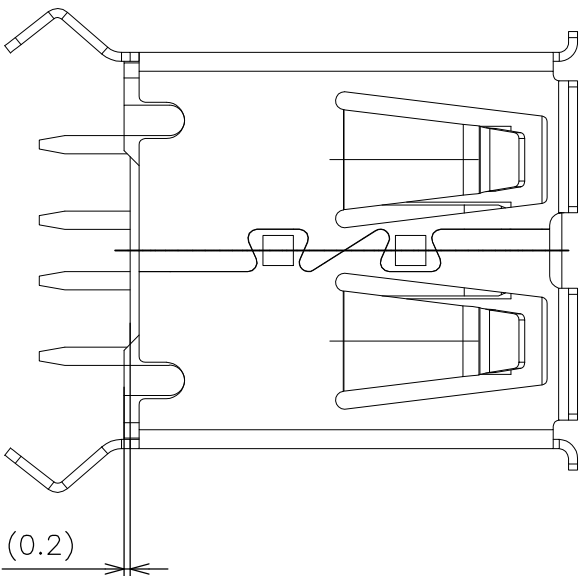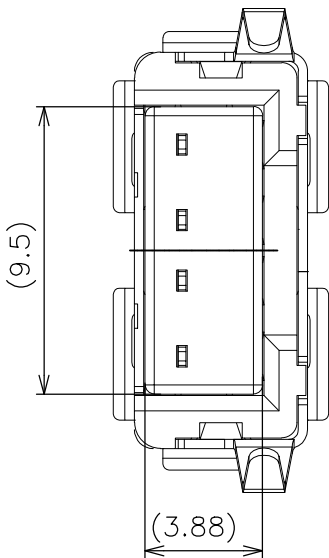

SEE SHEET 4	BLACK	1734366-7		
PACKING	HSG'S COLOR	PART NUMBER	HOUSING MATERIAL	SHIELD FINISH

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity			
		CHK				
		APVD				
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		
		0 PLC	± 0.38	RECEPT ASSY,VERTICAL,4POSITION THRU-HOLE,TYPE A USB		
		1 PLC	± 0.25			
		2 PLC	± 0.13			
		3 PLC	± 0.05			
		ANGLES FINISH		SIZE		
MATERIAL				CAGE CODE		
				DRAWING NO		
				RESTRICTED TO		
				A300779		
				C=1734366		
				SCALE		
				SHEET		
				3 OF 6		
				REV		
				C5		

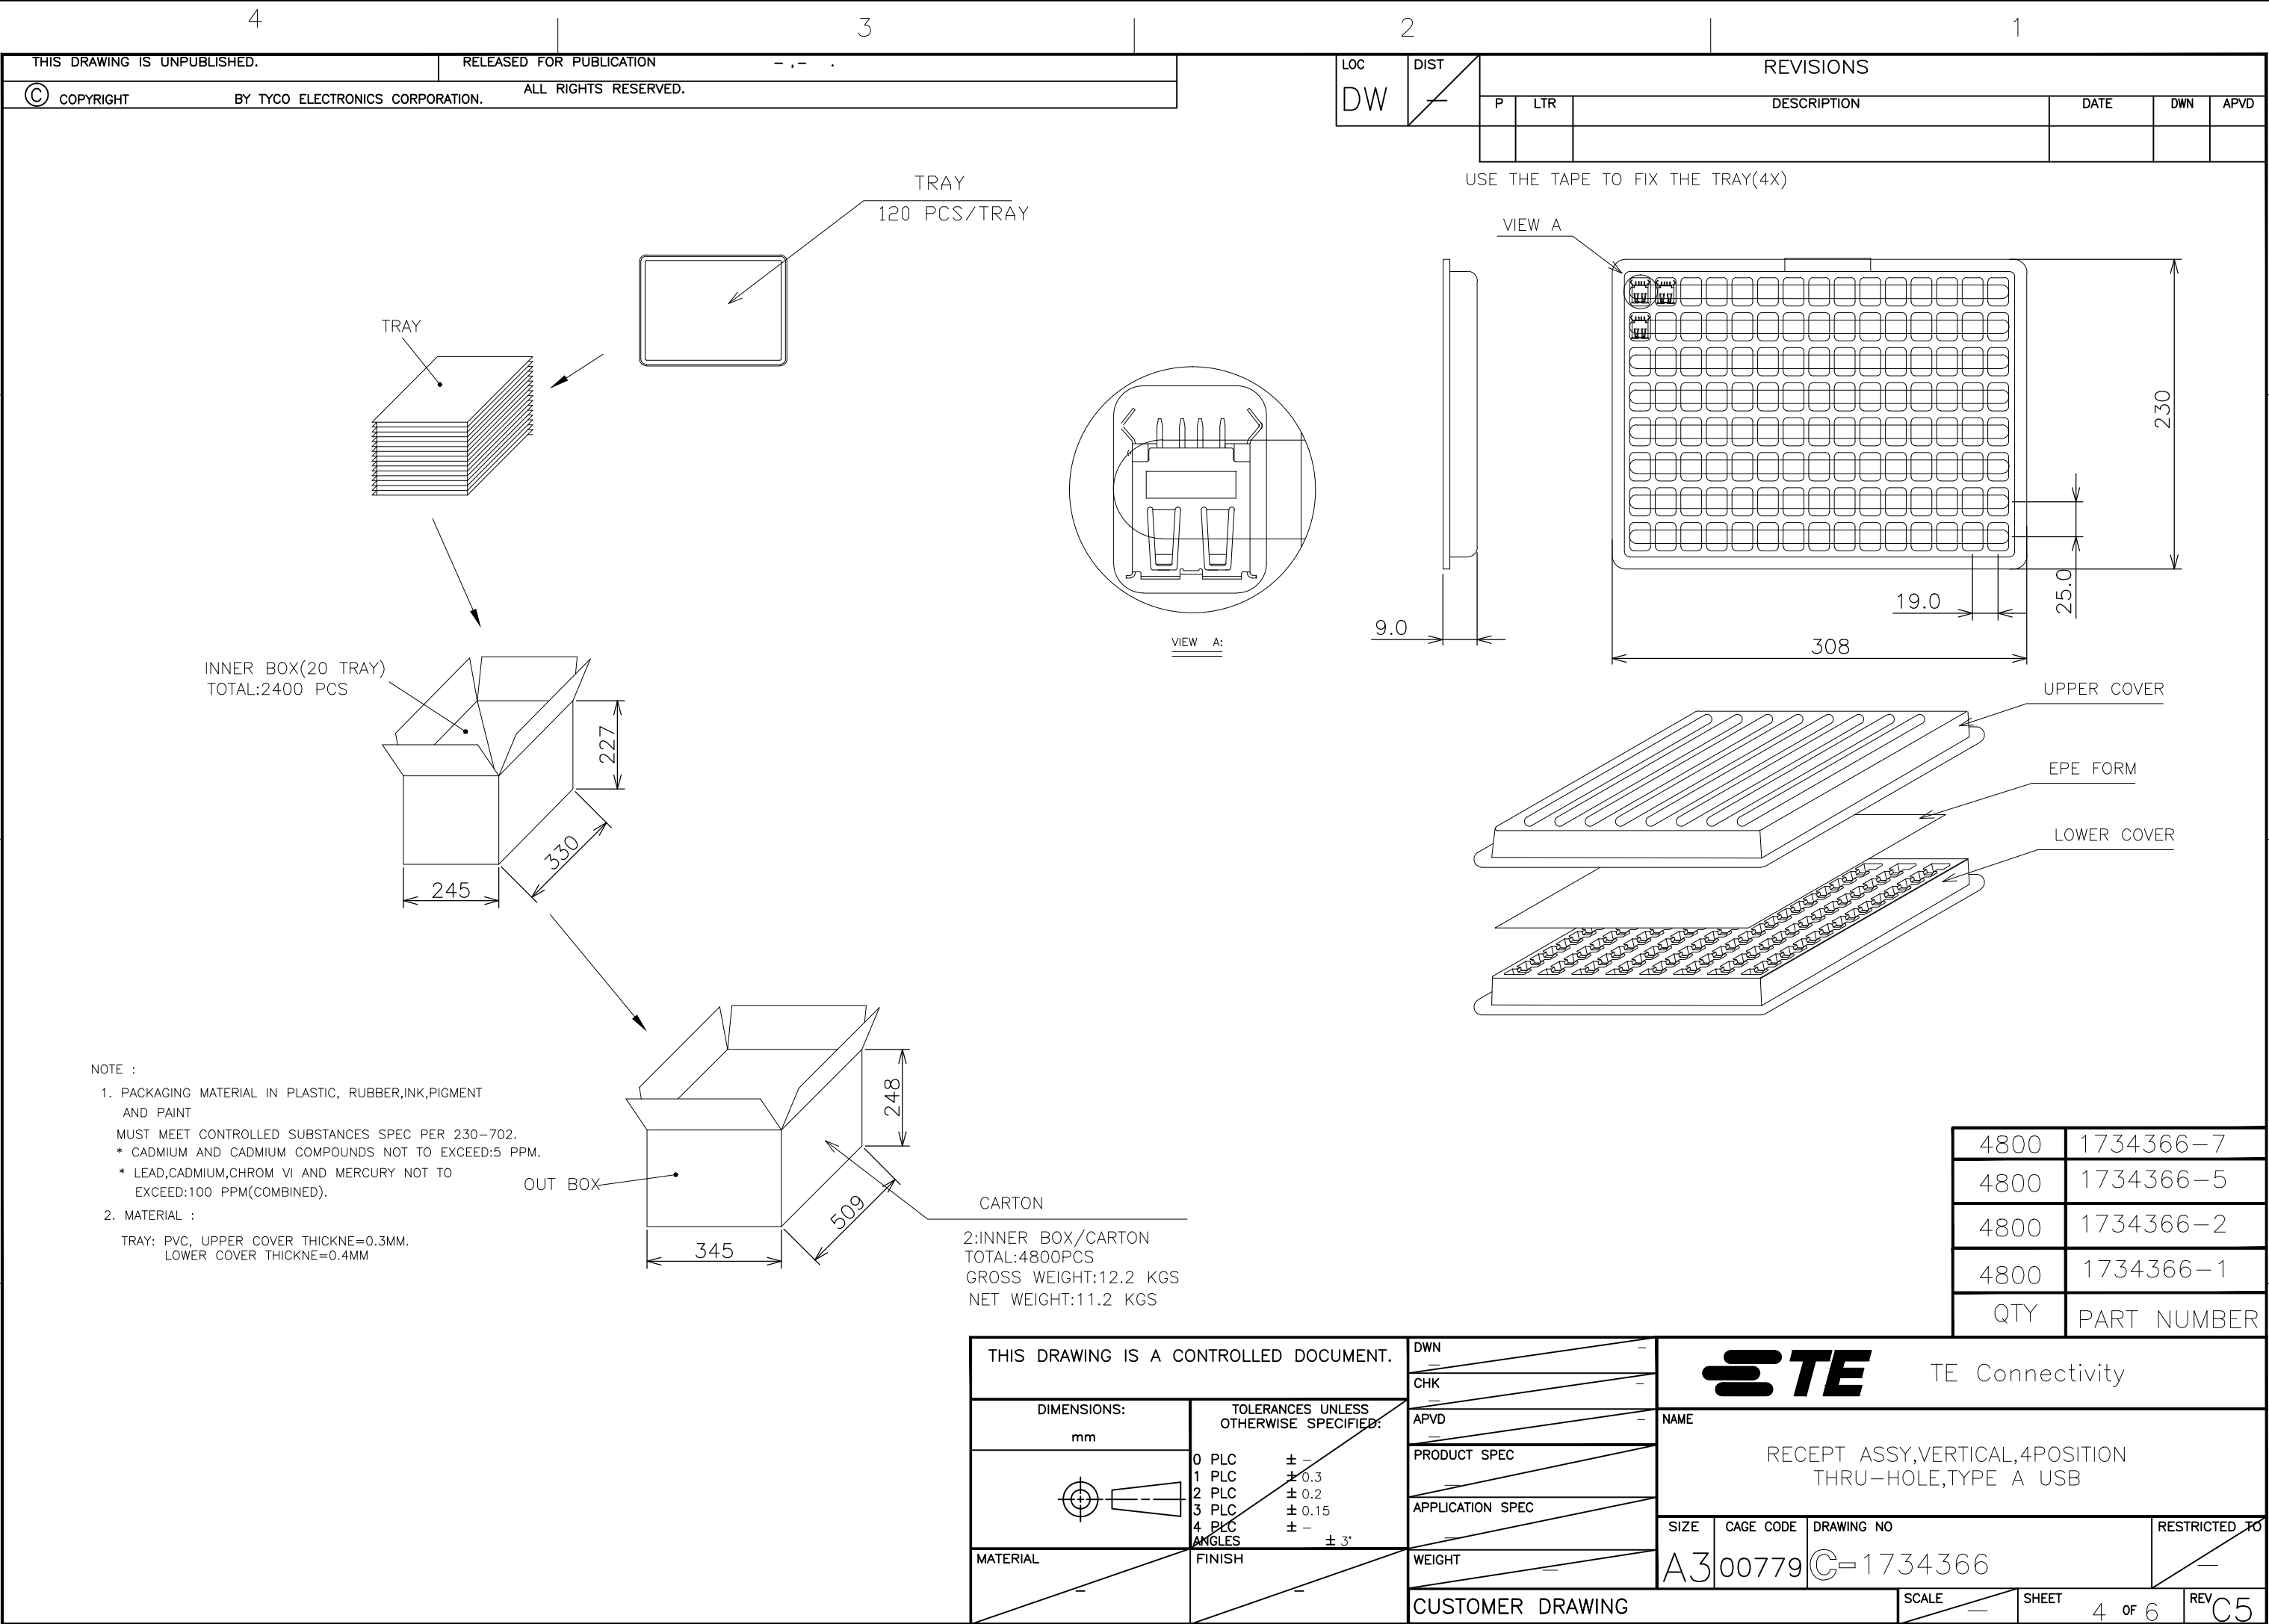

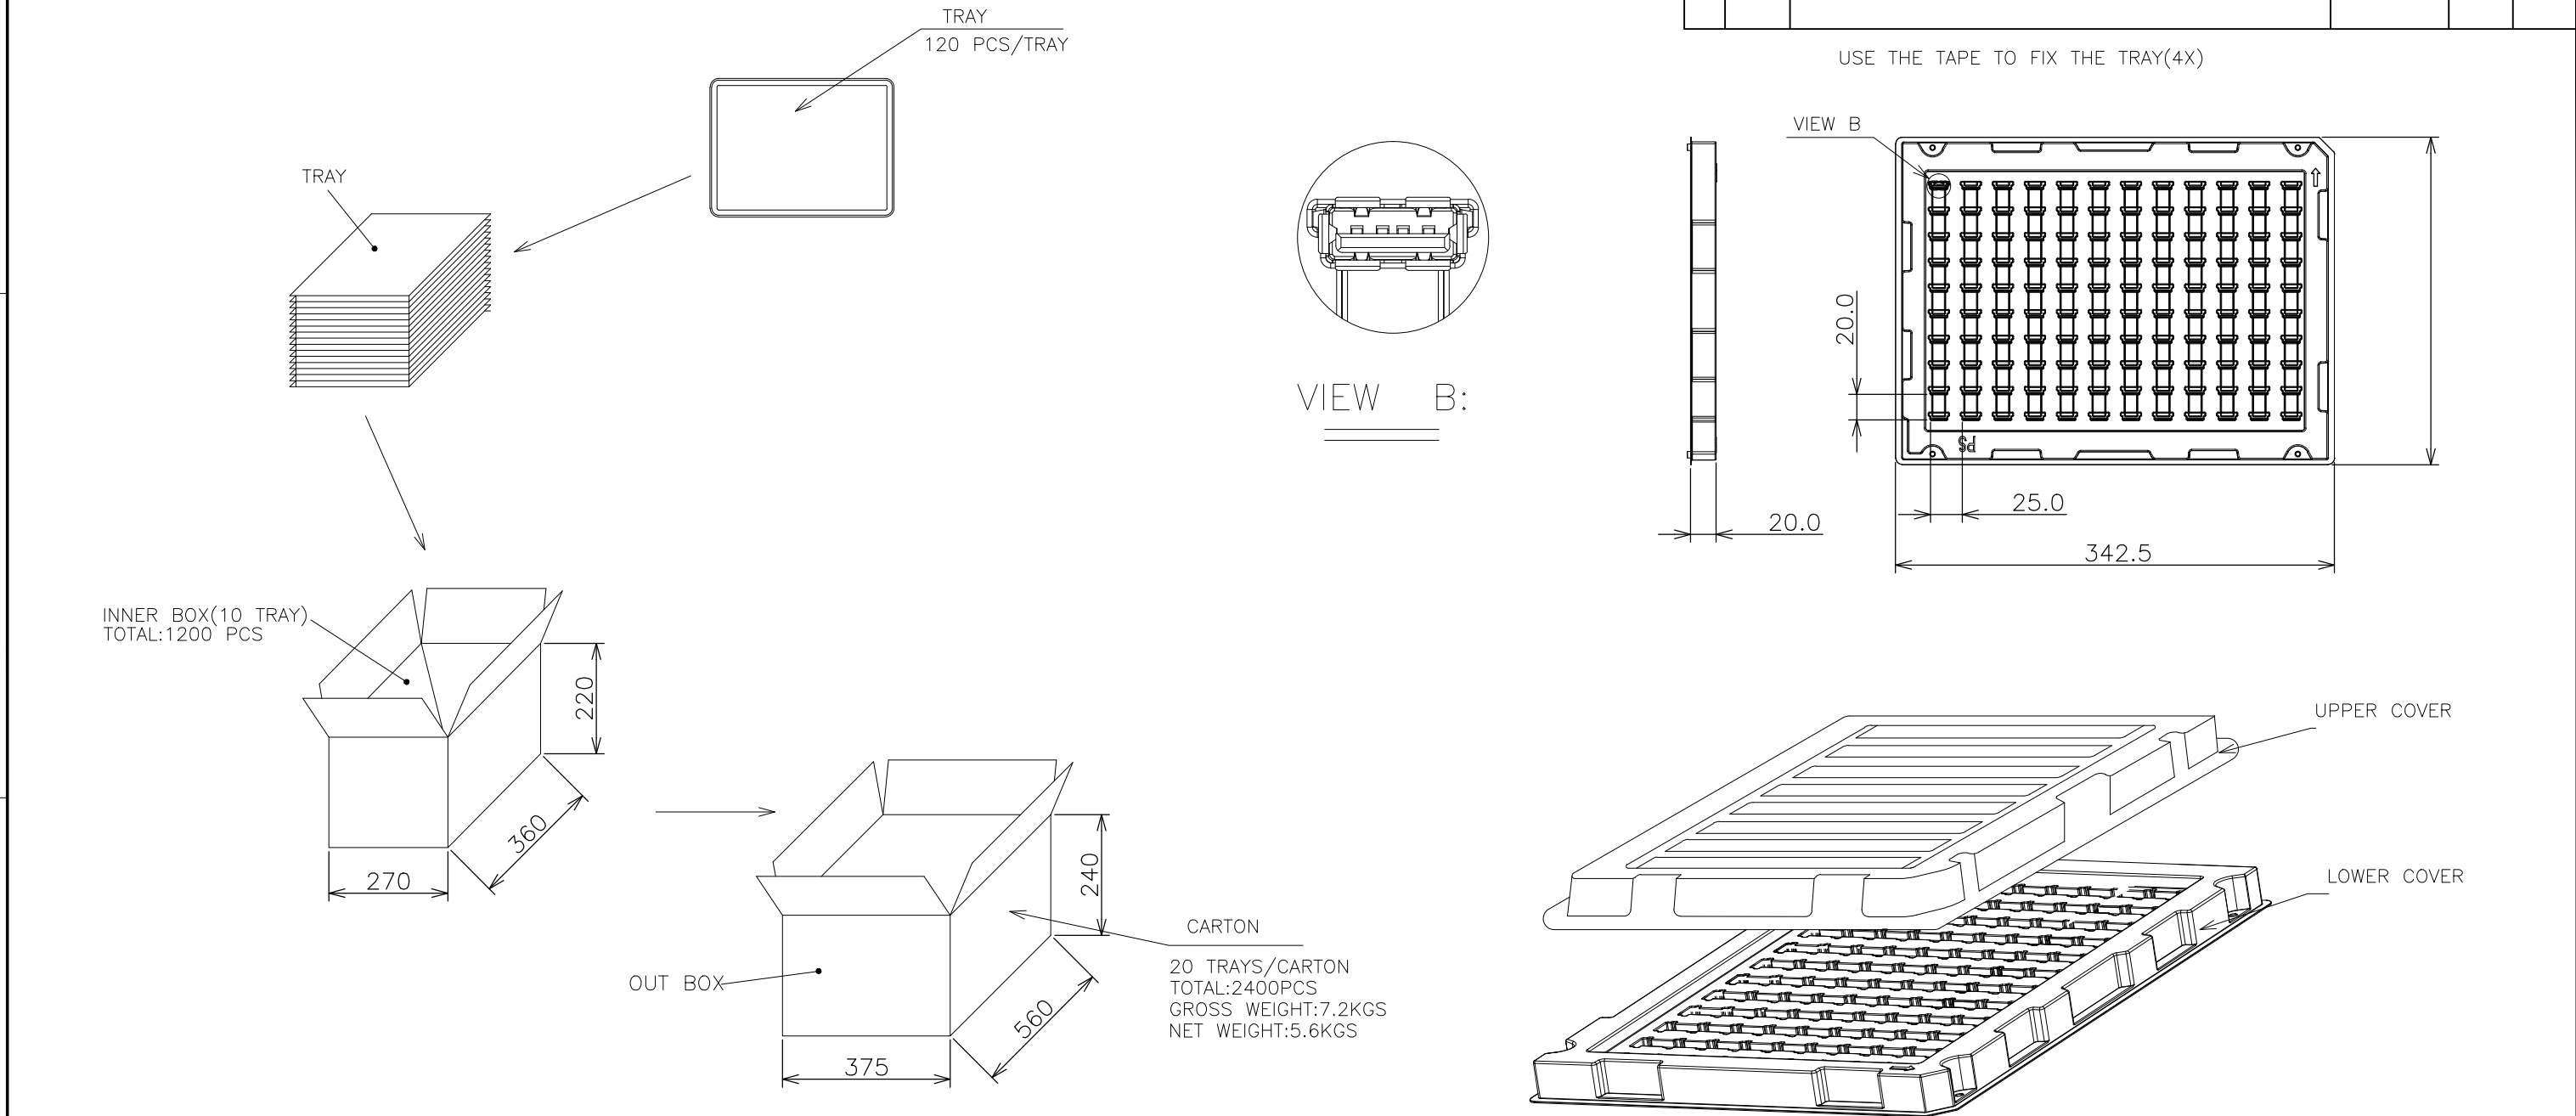

NOTE :

1. PACKAGING MATERIAL IN PLASTIC, RUBBER,INK,PIGMENT AND PAINT
MUST MEET CONTROLLED SUBSTANCES SPEC PER 230-702.
* CADMIUM AND CADMIUM COMPOUNDS NOT TO EXCEED:5 PPM.
* LEAD,CADMIUM,CHROM VI AND MERCURY NOT TO EXCEED:100 PPM(COMBINED).

2. MATERIAL :


TRAY: PS, UPPER COVER THICKNE=0.5MM.
LOWER COVER THICKNE=0.7MM

2400	1734366-4
2400	1734366-3
QTY	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		 TE Connectivity	
DIMENSIONS: mm		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD		NAME	
0 PLC ± -		PRODUCT SPEC		RECEIPT ASSY,VERTICAL,4POSITION THRU-HOLE,TYPE A USB	
1 PLC ± 0.3		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO	
2 PLC ± 0.2		WEIGHT		A300779C=1734366	
3 PLC ± 0.15		CUSTOMER DRAWING		RESTRICTED TO	
4 PLC ± -		SCALE		SHEET 5 of 6	
ANGLES ± 3°		REV		C5	
FINISH					
MATERIAL					



1. PACKAGING MATERIAL IN PLASTIC, RUBBER,INK,PIGMENT
AND PAINT
MUST MEET CONTROLLED SUBSTANCES SPEC PER 230-702.
* CADMIUM AND CADMIUM COMPOUNDS NOT TO EXCEED:5 PPM.
* LEAD,CADMIUM,CHROM VI AND MERCURY NOT TO
EXCEED:100 PPM(COMBINED).
2. MATERIAL :
REEL:BLACK CONDUCTIVE POLYSTYRENE ALLOY

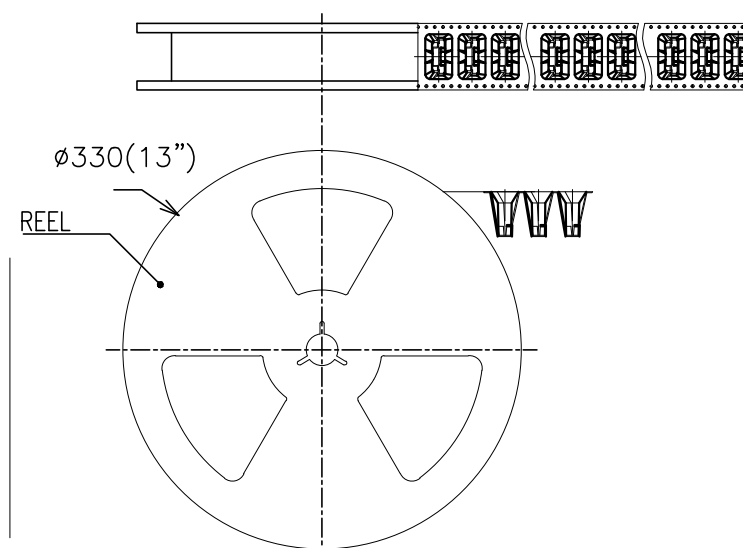

1440	1734366-6
QTY	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0	PLC	$\pm -$
1	PLC	± 0.3
2	PLC	± 0.2
3	PLC	± 0.15
4	PLC	$\pm -$
ANGLES		

[illegible]

FINISH

CUSTOMER DRAWING



TE Connectivity

NAME

RECEPT ASSY,VERTICAL,4POSITION
THRU-HOLE,TYPE A USB

SIZE

CAGE CODE

E	DRAWING NO
---	------------

RESTRICTED TO

A300779C-1734366

	SCALE
--	-------

SHEET

6 OF 6

REV C5

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru