
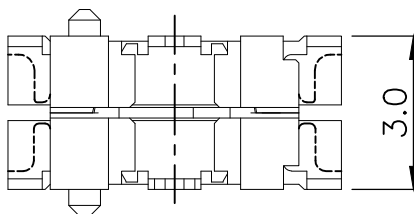


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	G	ECR-16-006855	18MAY2016	WL	SY

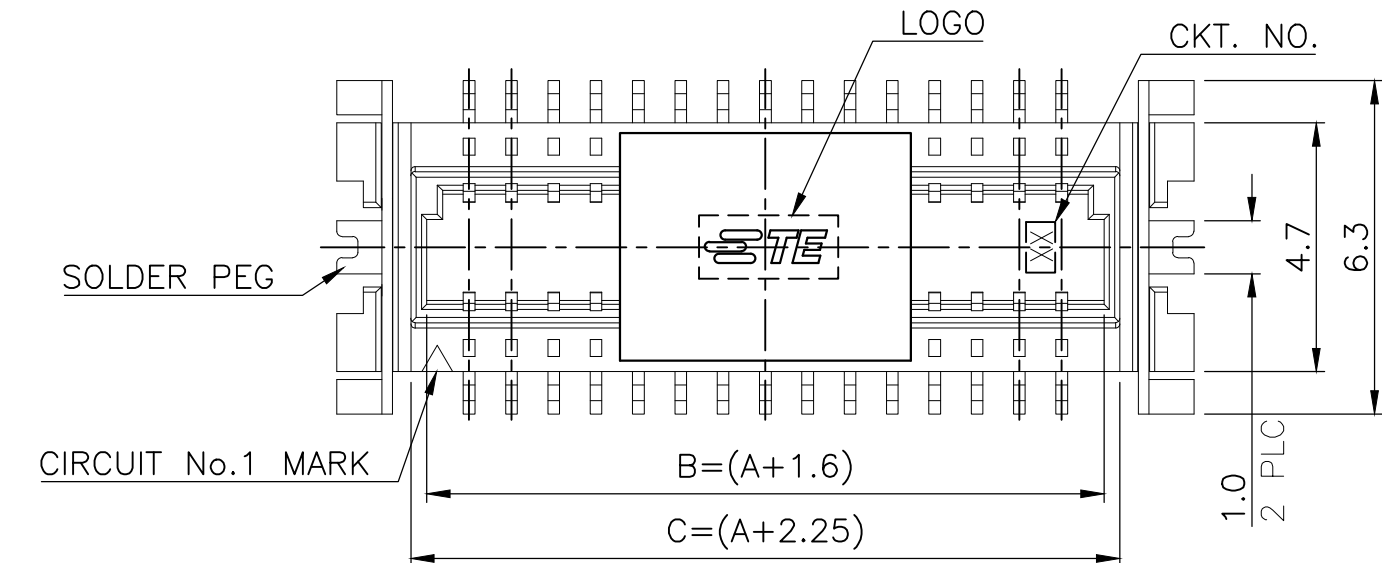

- NOTES:
- MATERIAL:
 - HOUSING: PA6T, UL94V-0; COLOR: NATURAL.
 - CONTACTS: PHOSPHOR BRONZE.
 - PEGS: BRASS.
 - FINISH:

CONTACTS: (SEE TABLE)

PLATING B : GOLD FLASH ON ENTIRE CONTACT.





PLATING C : 100μ" MIN. MATTE-TIN ON ENTIRE CONTACT. (WITH ENTIRE CONTACT UNDERPLATED 50μ" MIN. NICKEL.)

PEGS: 100μ" MIN. TIN OR MATTE-TIN OVER 50μ" MIN. NICKEL.
 - PART NUMBER OF MATING RECEPTACLE: X-1775013-X
 - REFLOW SOLDER CAPABLE TO 260°C AS PER TEC-109-201, CONDITION B.
 - SUBSTANCE RESTRICTIONS FOR LOW HALOGEN (BY WEIGHT):


BROMINE (Br) ≤ 900 PPM (0.09%)

CHLORINE (Cl) ≤ 900 PPM (0.09%)

TOTAL CONCENTRATION OF (Cl) + (Br) ≤ 1500 PPM (0.15%)

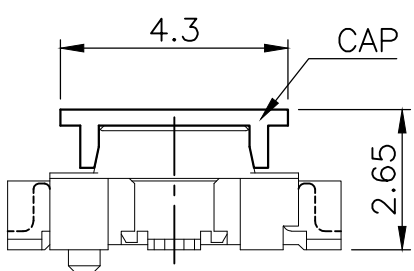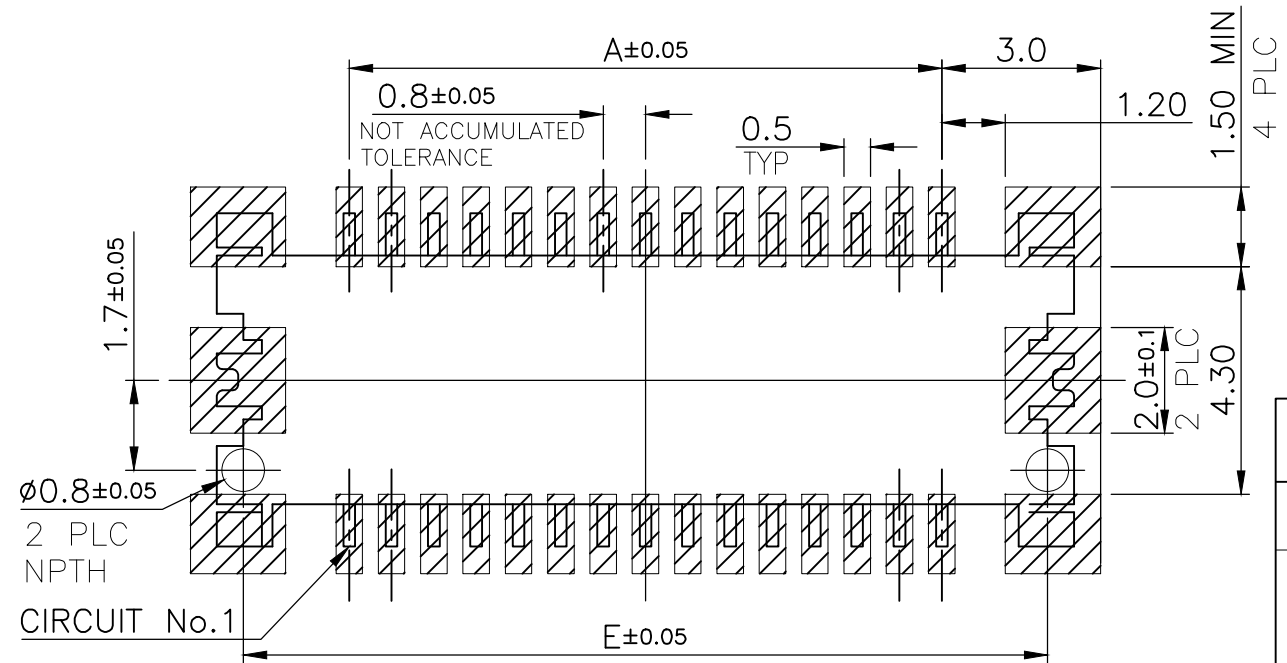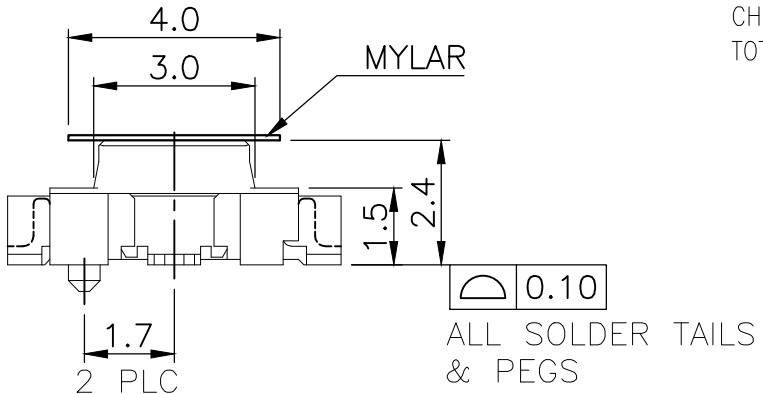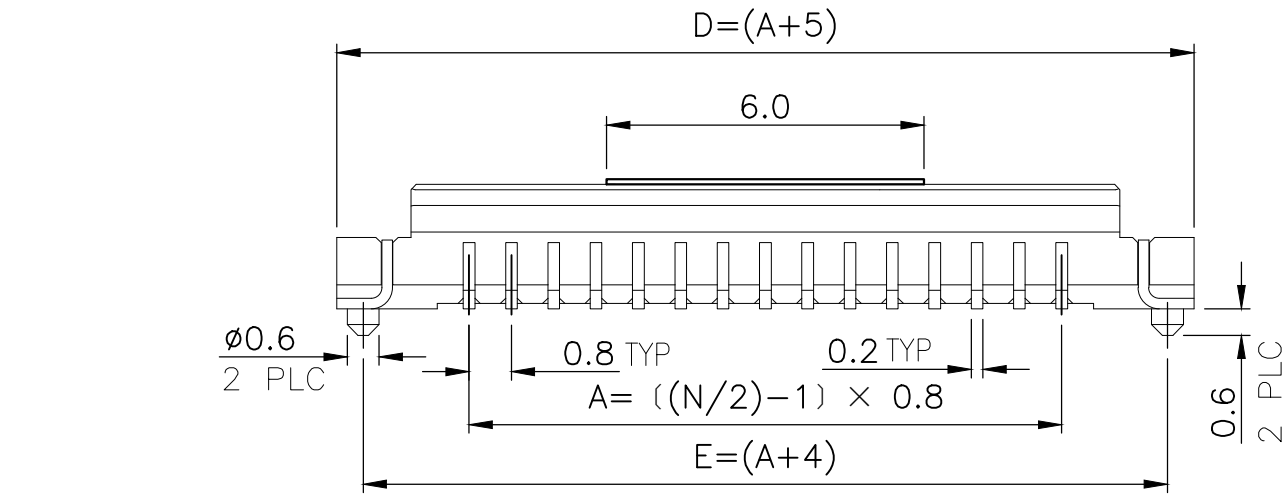

CAP	C	8	9	6.25	5.6	4.0	12	5-1775014- 4
MYLAR	B	12.8	13.8	11.05	10.4	8.8	24	1775014- 2
		8	9	6.25	5.6	4.0	12	1775014- 1
CAP OR MYLAR	CONTACT PLATING	E	D	C	B	A	NO. OF CONTACTS	PART NUMBER
DIMENSIONS								

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. WU 05FEB2013		 TE Connectivity							
DIMENSIONS: mm		CHK S. CHIEN 05FEB2013									
		APVD W. KODAMA 05FEB2013		NAME BOARD-TO-BOARD CONNECTOR, 0.8mm PITCH, FINE-STACK 3H. PLUG							
		PRODUCT SPEC 108-57488									
		APPLICATION SPEC —									
		WEIGHT 0									
TOLERANCES UNLESS OTHERWISE SPECIFIED:		0 PLC ± — 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± 0.15 4 PLC ± — ANGLES ± 2°		SIZE A3		CAGE CODE 00779		DRAWING NO C-1775014		RESTRICTED TO —	
MATERIAL —		FINISH —		CUSTOMER DRAWING							
				SCALE 7:1		SHEET 1 OF 2		REV G			

4

3

2

1


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

D

C

B

A

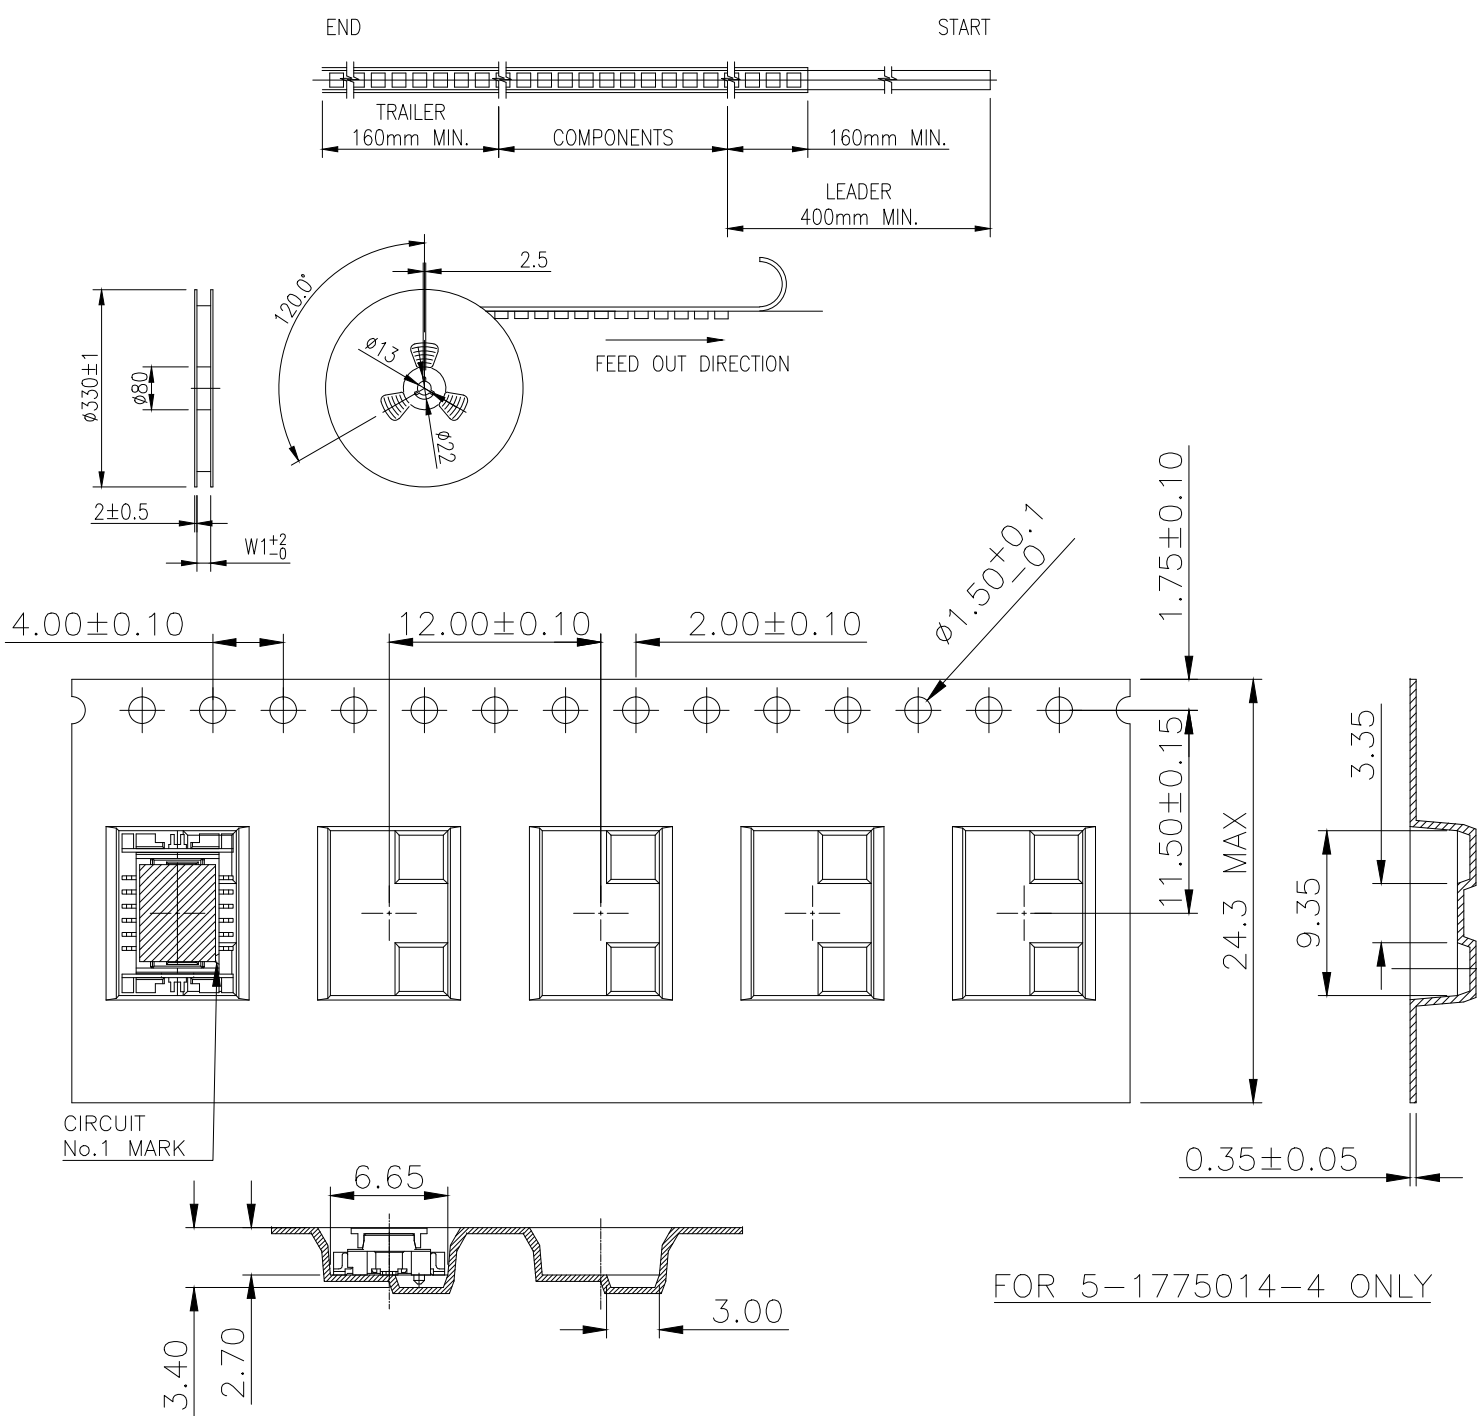


- NOTES:
- MATERIAL:
BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
COVER TAPE: PET, TRANSPARENT COLOR.
CARRIER TAPE: POLYSTYRENES, BLACK COLOR.
REEL: PAPER, BROWN COLOR.
BAG: POLYETHYLENES, TRANSPARENT COLOR.
 - EACH BAG SHALL BE INCLUDED DESICCANT.
 - PEELING STRENGTH: 0.1~1.3 N (10~130 GRAMS).
 - PEELING SPEED: 300 mm/min.

D


C

B

A

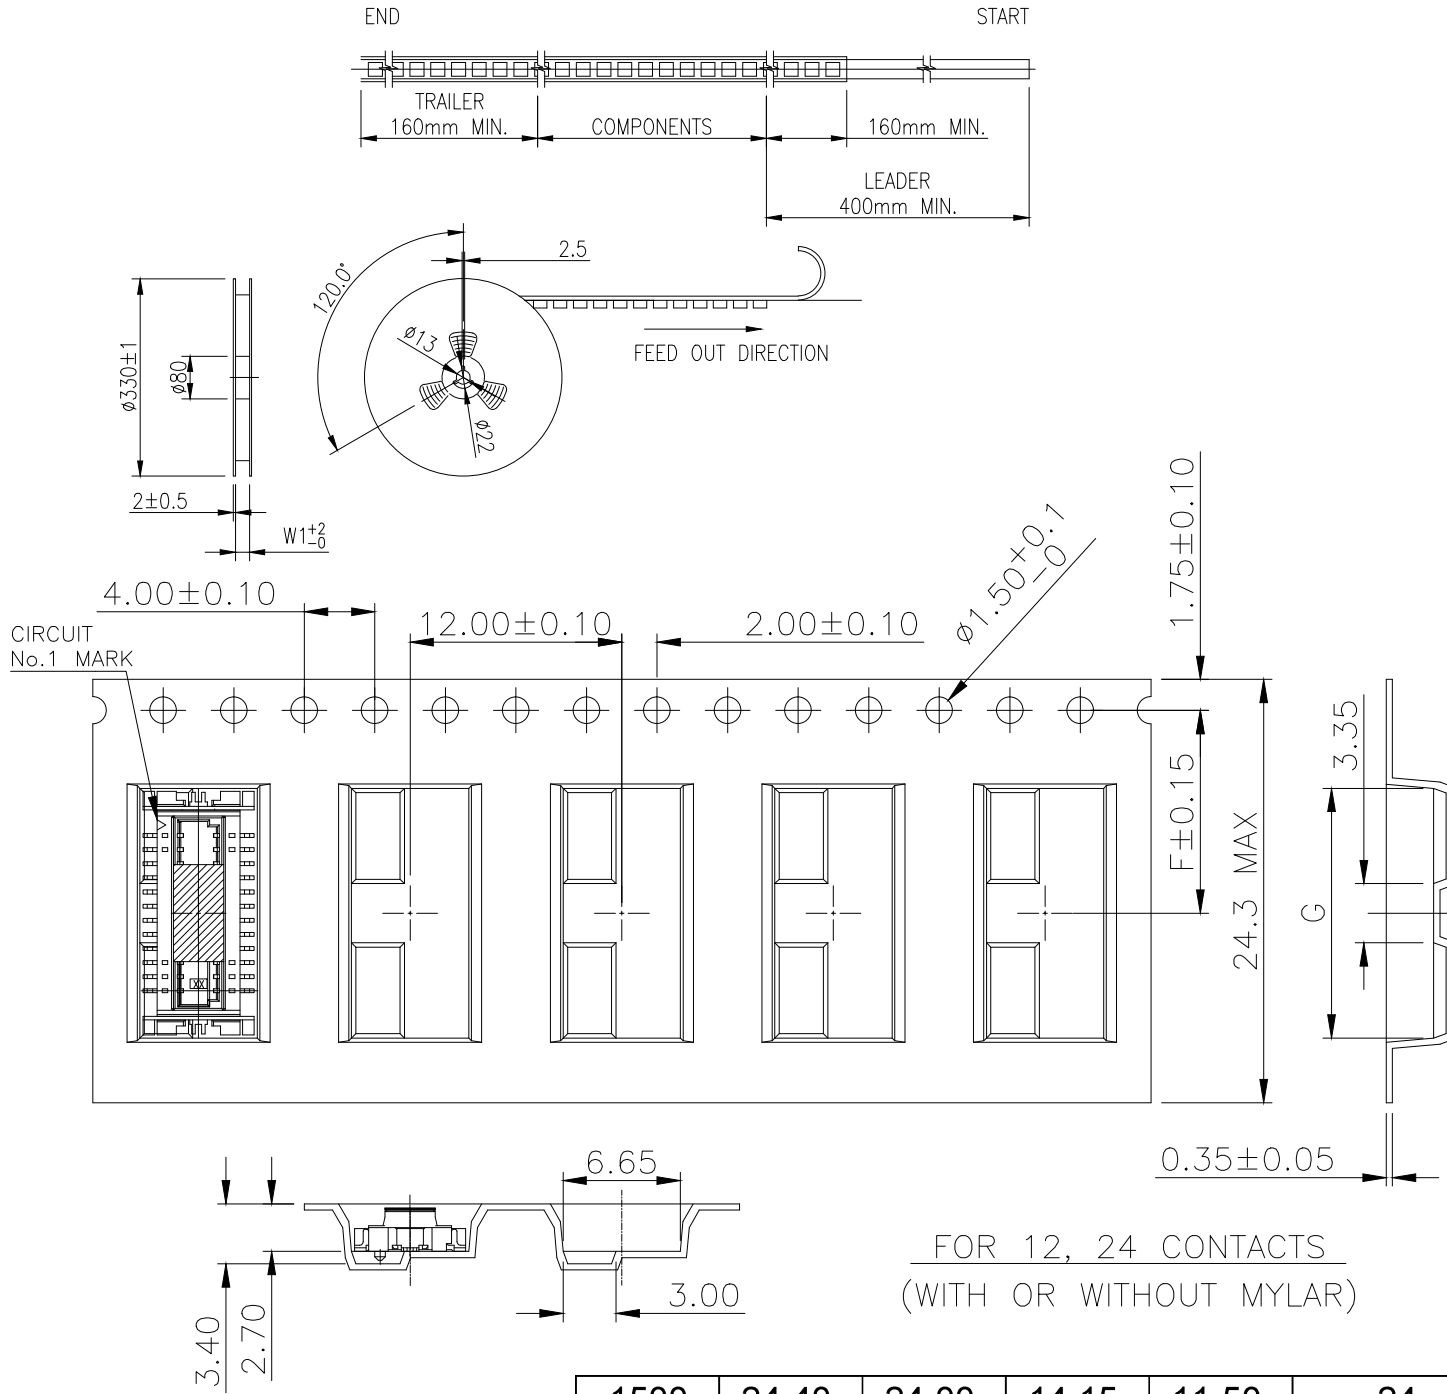

1500	24.40	24.00	14.15	11.50	24
1500	24.40	24.00	9.35	11.50	12
PCS / TAPE	W1	W	G	F	NO. OF CONTACTS
DIMENSIONS					

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. WU 05FEB2013	TE Connectivity										
		CHK S. CHIEN 05FEB2013											
		APVD W. KODAMA 05FEB2013											
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME										
	0 PLC ± -		BOARD-TO-BOARD CONNECTOR, 0.8mm PITCH, FINE-STACK 3H. PLUG										
	1 PLC ± 0.3												
	2 PLC ± 0.2												
	3 PLC ± 0.15												
	4 PLC ± -												
	ANGLES ± 2°												
MATERIAL	FINISH	PRODUCT SPEC 108-57488		APPLICATION SPEC —		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO				
—	—	WEIGHT 0		A3		00779	C=1775014		—				
CUSTOMER DRAWING						SCALE	7:1		SHEET	2 of 2		REV	G

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru