


Thermofit<sup>®</sup> Molded Parts  
Specification Control Drawing

Part Number : 222D921 thru 963  
Description : Boot, 90°, With Lip

NOTES

- All dimensions are in  $\frac{\text{inches}}{\text{[millimeters]}}$
- Dimensions appearing in table are as follows:  
a - As Supplied  
b - After Unrestricted Recovery
- Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by .06 max.
- Molding ports are optional. When -00 modification number is specified molding ports will be located as shown.

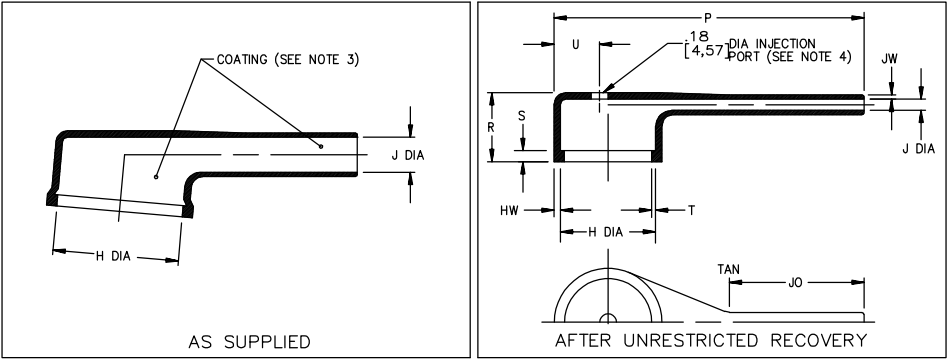

| TABLE OF DIMENSIONS |             |             |                       |                     |           |              |            |            |             |            |             |            |
|---------------------|-------------|-------------|-----------------------|---------------------|-----------|--------------|------------|------------|-------------|------------|-------------|------------|
| PART NUMBER         | H           |             | J                     |                     |           | P            | R          | S          | T           | U          | JO          | JW         |
|                     | Min a       | Max b       | Min -3, -4, -6, -25 a | Min -8, -12, -100 a | Max b     | ±10% b       | Ref b      | Ref b      | Ref b       | ±10% b     | ±10% b      | ±20% b     |
| 222D921             | .76 [19,3]  | .51 [13,0]  | .25 [6,3]             | .18 [4,5]           | .08 [2,1] | 1.75 [44,5]  | .64 [16,3] | .12 [3,05] | .04 [1,02]  | .22 [5,6]  | .86 [21,8]  | .06 [1,52] |
| 222D932             | 1.03 [26,1] | .75 [19,1]  | .30 [7,6]             | .22 [5,6]           | .10 [2,6] | 2.65 [67,3]  | .71 [18,0] | .12 [3,05] | .04 [1,02]  | .33 [8,4]  | 1.15 [29,2] | .07 [1,78] |
| 222D953             | 1.35 [34,2] | 1.02 [26,0] | .38 [9,6]             | .26 [6,6]           | .12 [3,0] | 3.20 [81,3]  | .74 [18,8] | .12 [3,05] | .04 [1,02]  | .45 [11,4] | 1.39 [36,3] | .07 [1,78] |
| 222D963             | 1.72 [43,6] | 1.34 [34,1] | .45 [11,4]            | .31 [7,8]           | .14 [3,6] | 4.55 [115,6] | .84 [21,3] | .12 [3,05] | .065 [1,65] | .61 [15,5] | 1.85 [47,0] | .07 [1,78] |

IF THIS DOCUMENT IS PRINTED IT BECOMES UNCONTROLLED.  
CHECK FOR THE LATEST REVISION.

**STE Raychem**  
TE Connectivity  
TE CONNECTIVITY  
300 CONSTITUTION DRIVE  
MENLO PARK, CALIFORNIA 94025

Revision : H1  
Date : 20APR11

Part Number : 222D921 thru 963  
Description : Boot, 90°, With Lip

Thermofit<sup>®</sup> Molded Parts  
Specification Control Drawing

Part Number : 222D921 thru 963  
Description : Boot, 90°, With Lip

| COMPATABILITY CHART |                                       |         |                   |                        |                     |
|---------------------|---------------------------------------|---------|-------------------|------------------------|---------------------|
| MATERIAL DASH NO.   | MATERIAL DESCRIPTION                  | RT SPEC | COATING SLASH NO. | COATING S NO.          | COATING DESCRIPTION |
| -3                  | Polyolefin, Semi-rigid                | RT-301  | /42; /86; /87     | S-1017; S-1048; S-1052 | Adhesive            |
| -4                  | Polyolefin, Flexible                  | RT-1304 | /42; /86; /87     | S-1017; S-1048; S-1052 | Adhesive            |
| -6                  | Silicone                              | RT-602  | N/A               |                        |                     |
| -8                  | Polyolffin, Space                     | RT-1308 | N/A               |                        |                     |
| -12                 | *VITON, Flexible                      | RT-1312 | N/A               |                        |                     |
| -25                 | Elastomer, Fluid Resistant            | RT-1325 | /86               | S-1048                 | Adhesive            |
| -100                | Polyolefin, Semi-flexible<br>ZEROHAL™ | RT-1323 | /86; /184         | S-1048; S-1030         | Adhesive            |

\*VITON is a Registered Trademark of Dupont

ORDERING INFORMATION

222D9XX

-XX

-XX

/XXX

Base part number

Material dash number  
(See Compatability Chart)

Modification number  
(If necessary, see front of scd binder  
for a complete list)

Adhesive slash number  
(If necessary, see Compatability Chart)

THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE; CONSULT YOUR  
NEAREST FIELD REPRESENTATIVE FOR CURRENT REVISION

**STE Raychem**  
TE Connectivity  
TE CONNECTIVITY  
300 CONSTITUTION DRIVE  
MENLO PARK, CALIFORNIA 94025

Revision : H1  
Date : 20APR11

Part Number : 222D921 thru 963  
Description : Boot, 90°, With lip

IF THIS DOCUMENT IS PRINTED IT BECOMES UNCONTROLLED.  
CHECK FOR THE LATEST REVISION.

CAD FILE MP95076

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)