

## M12 Field Attachable Connectors (Stainless Steel Hardware)

### RSCWN | RKCWN




#### Male, 4- and 5-Pole (90°)

Field attachable connector, M12 male right angle connector, 4- and 5-pole with stainless steel hexagon threaded joint, assembling with screw terminals.

– especially designed for use in food processing equipment –

#### RSCWN

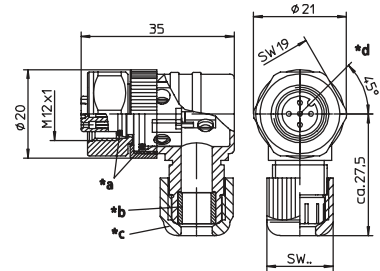

- \*a O-Ring
- \*b gasket
- \*c cap nut
- \*d insert 90° rotatable




#### Female, 4- and 5-Pole

Field attachable connector, M12 female right angle connector, 4- and 5-pole with stainless steel hexagon threaded joint, assembling with screw terminals.

– especially designed for use in food processing equipment –

#### RKCWN

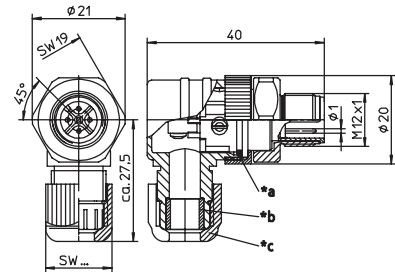


- \*a O-Ring
- \*b gasket
- \*c cap nut


### Pin Assignments

#### Face Views / M12, Male / Female

##### 4 pole



##### 5 pole





# Be Certain with Belden

## M12 Field Attachable Connectors (Stainless Steel Hardware)

RSCWN | RKCWN

### Technical Data

#### Environmental

Degree of protection IP 67 / NEMA 6P  
 Operating temperature range -25°C (-13°F) / +85°C (+185°F)

#### Mechanical

Housing / Molded body PBT  
 Insert PBT  
 Contact CuZn, pre-coppered, CuSnZn  
 8-poles pre-nickeled, gold-plated  
 Receptacle shell stainless steel  
 O-ring FKM  
 Mode of connection Screw terminals  
 Connectable conductor 4-5 poles max. 0.75 mm<sup>2</sup>  
 8 poles max. 0.50 mm<sup>2</sup>

#### Electrical

Contact resistance ≤ 5 mΩ  
 Nominal current at 40°C 4-5 poles 4 A  
 8 poles 2 A  
 Nominal voltage 4 poles 240 V  
 5 poles 60 V  
 8 poles 30 V  
 Rated voltage 4 poles 250 V  
 5 poles 63 V  
 8 poles 36 V  
 Test voltage 4 poles 2.0 kV eff. / 60 s  
 5 poles 1.5 kV eff. / 60 s  
 8 poles 0.9 kV eff. / 60 s  
 Insulation resistance > 109 Ω  
 Pollution degree 3

Part Number		Pins	Cable Diameter Range	Characteristics
Male	Female			
RSCWN 4/7	RKCWN 4/7	4	Ø 3.0-6.5 mm /SW 15	
RSCWN 4/9	RKCWN 4/9		Ø 4.0-8.0 mm /SW 19	
RSCWN 5/7	RKCWN 5/7	5	Ø 3.0-6.5 mm /SW 15	
RSCWN 5/9	RKCWN 5/9		Ø 4.0-8.0 mm /SW 19	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)