
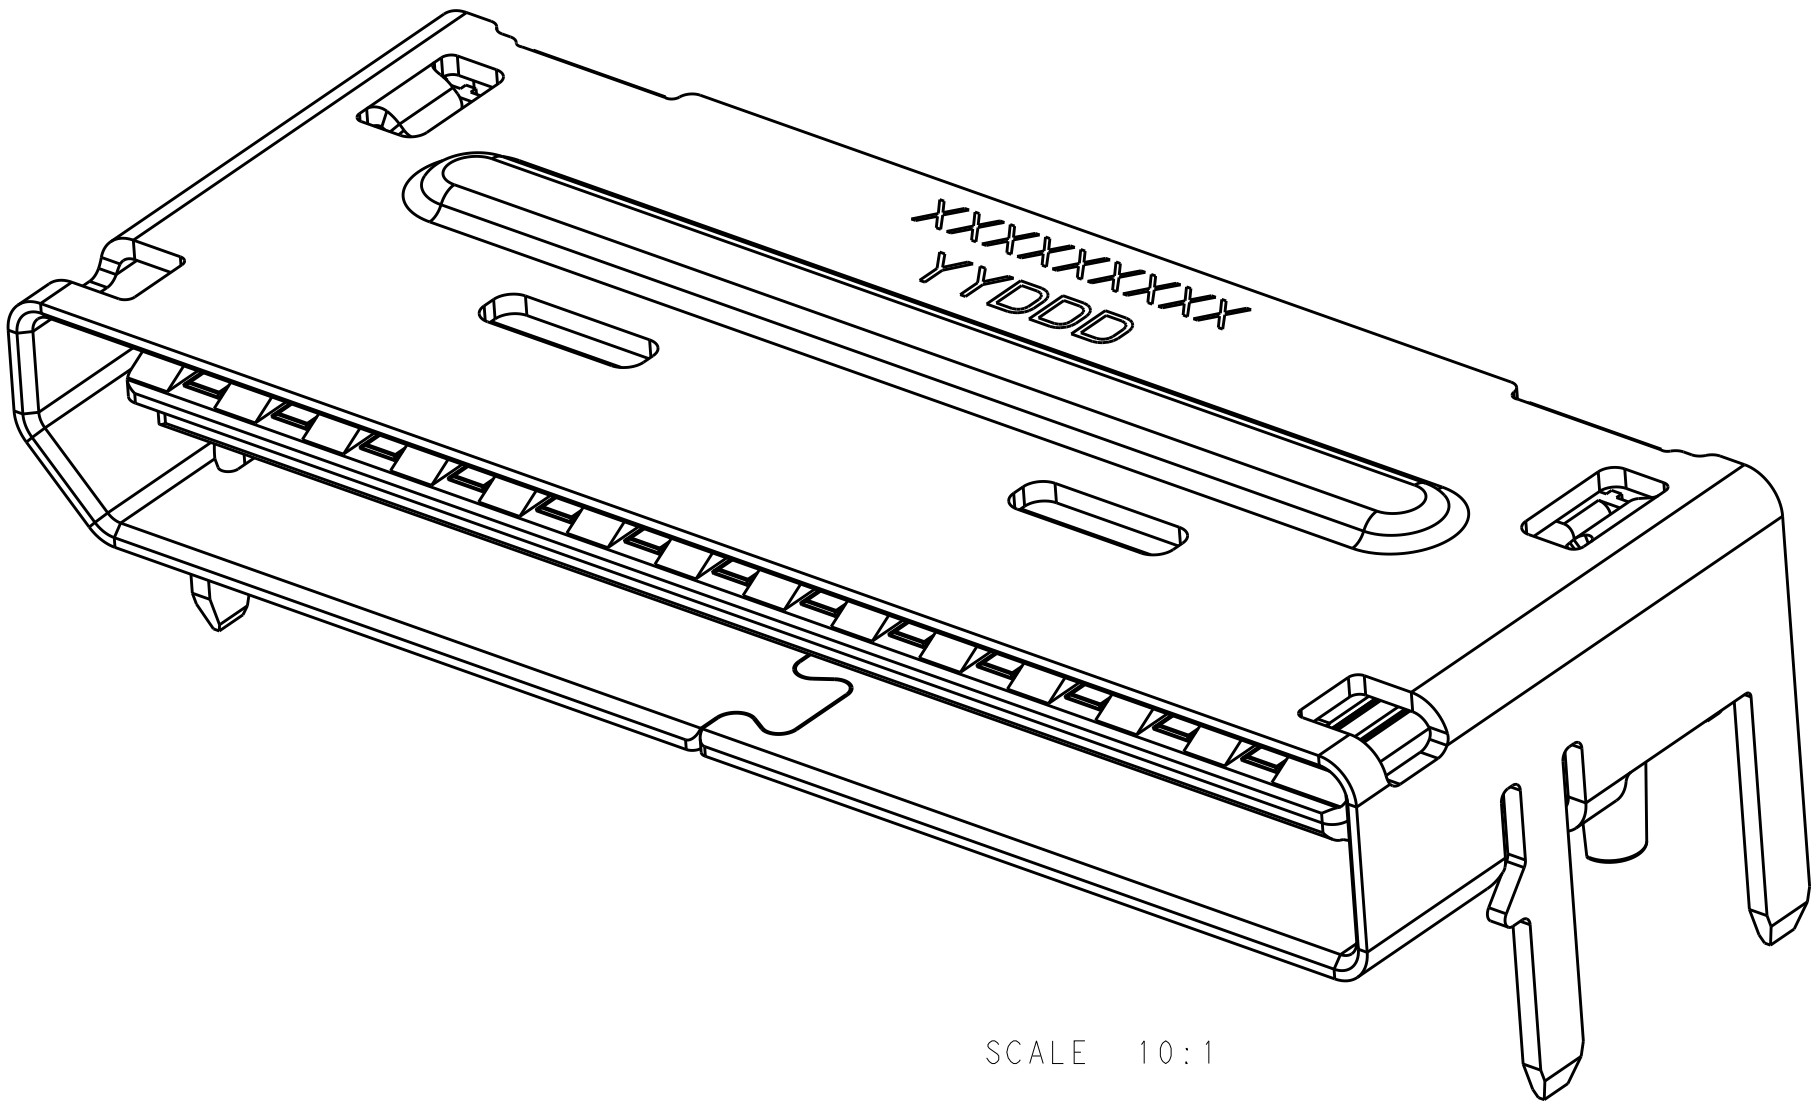



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	15NOV2017	LL	SH

- 1 MATERIALS:
HOUSING: GLASS FILLED THERMOPLASTIC, 94V-0
CONTACTS: HIGH PERFORMANCE COPPER ALLOY
SHIELD: STAINLESS STEEL.
- 2 FINISH:
CONTACTS: 0.00076 MIN GOLD ON CONTACT AREA, 0.00254 MIN
TIN ON SOLDER TAILS, ALL OVER 0.002 MIN NICKEL UNDERPLATE
ON ENTIRE CONTACT.
SHIELD: MATTE TIN OVER 0.00127 MIN. NICKEL.
- 3


 PART NUMBER AND DATE CODE MARKED IN APPROXIMATE AREA AS SHOWN.
- 4 SOLDER TAIL COPLANARITY IS 0.10 MAX.

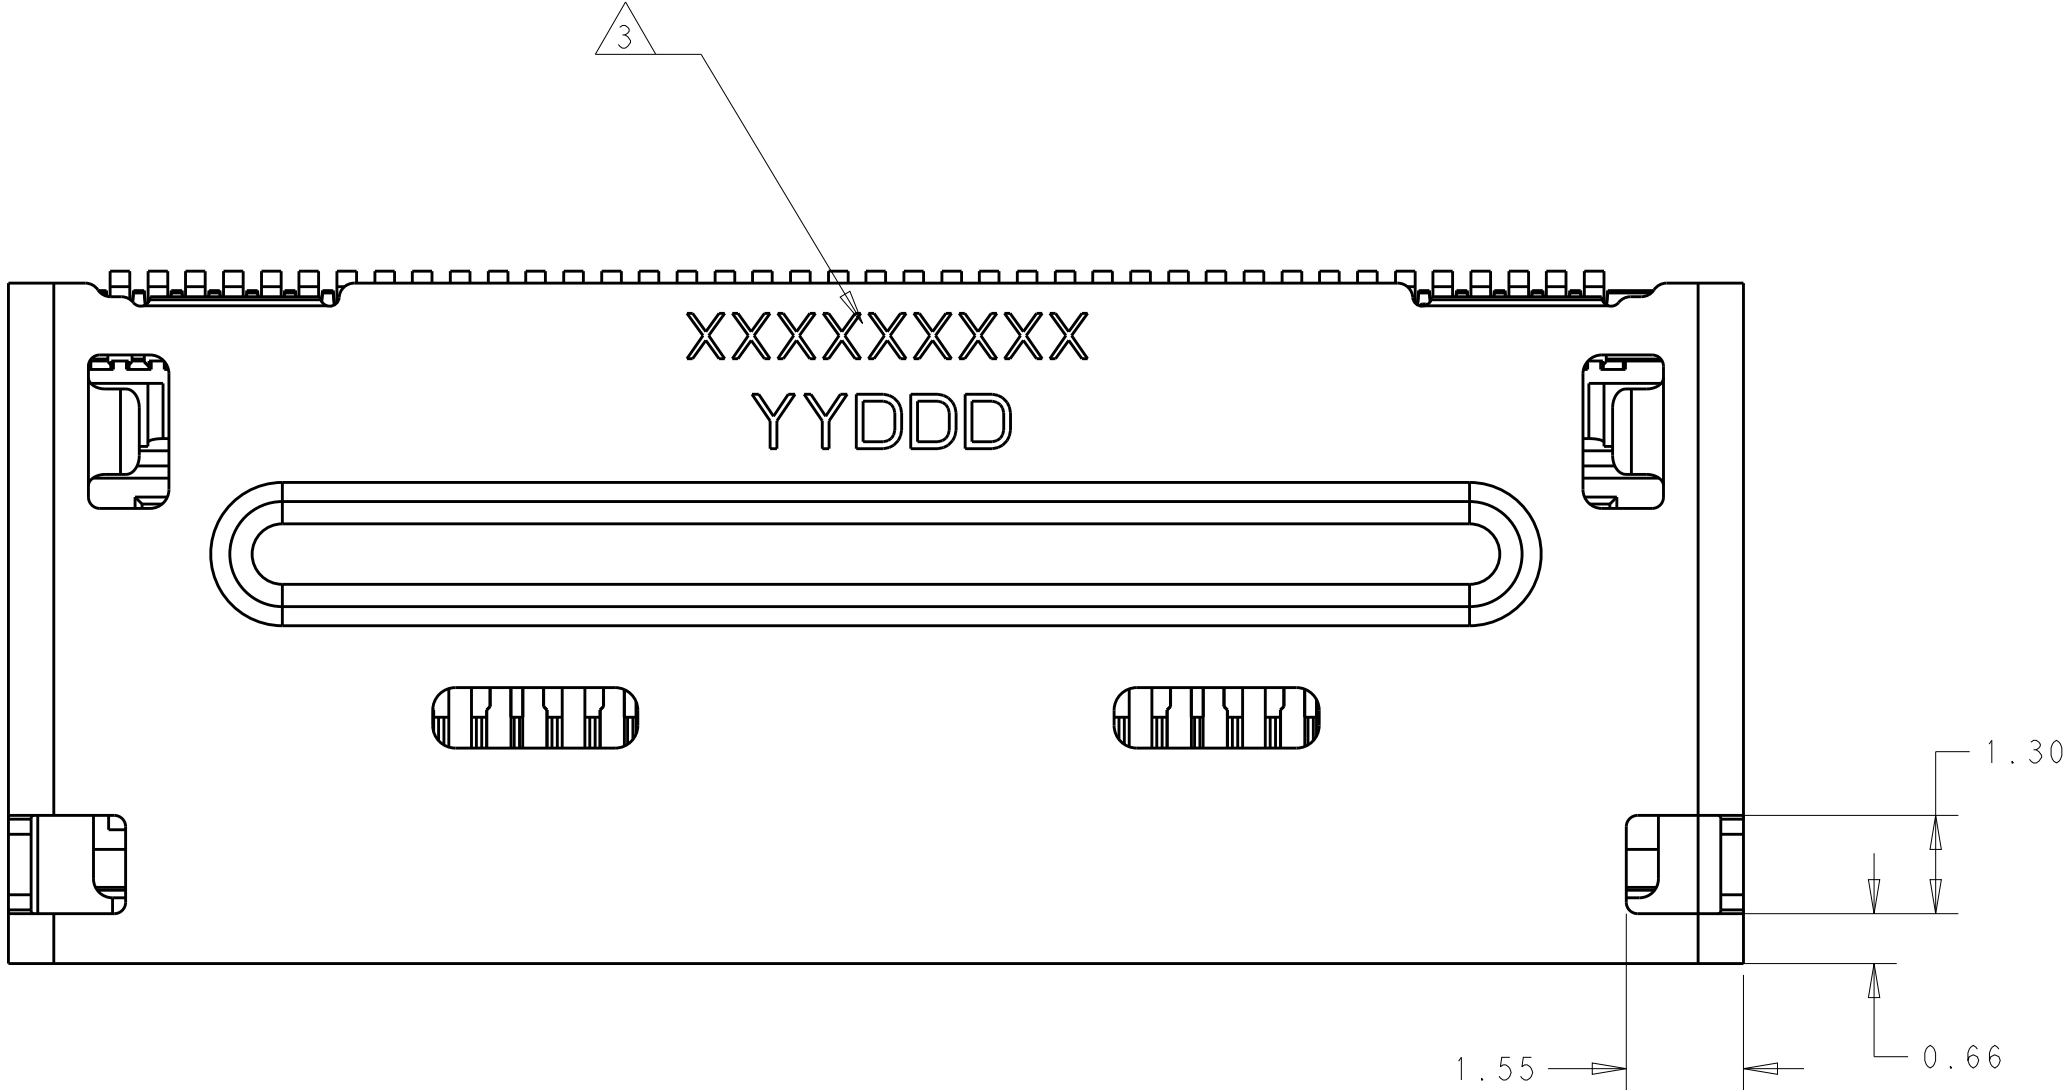


SCALE 10:1

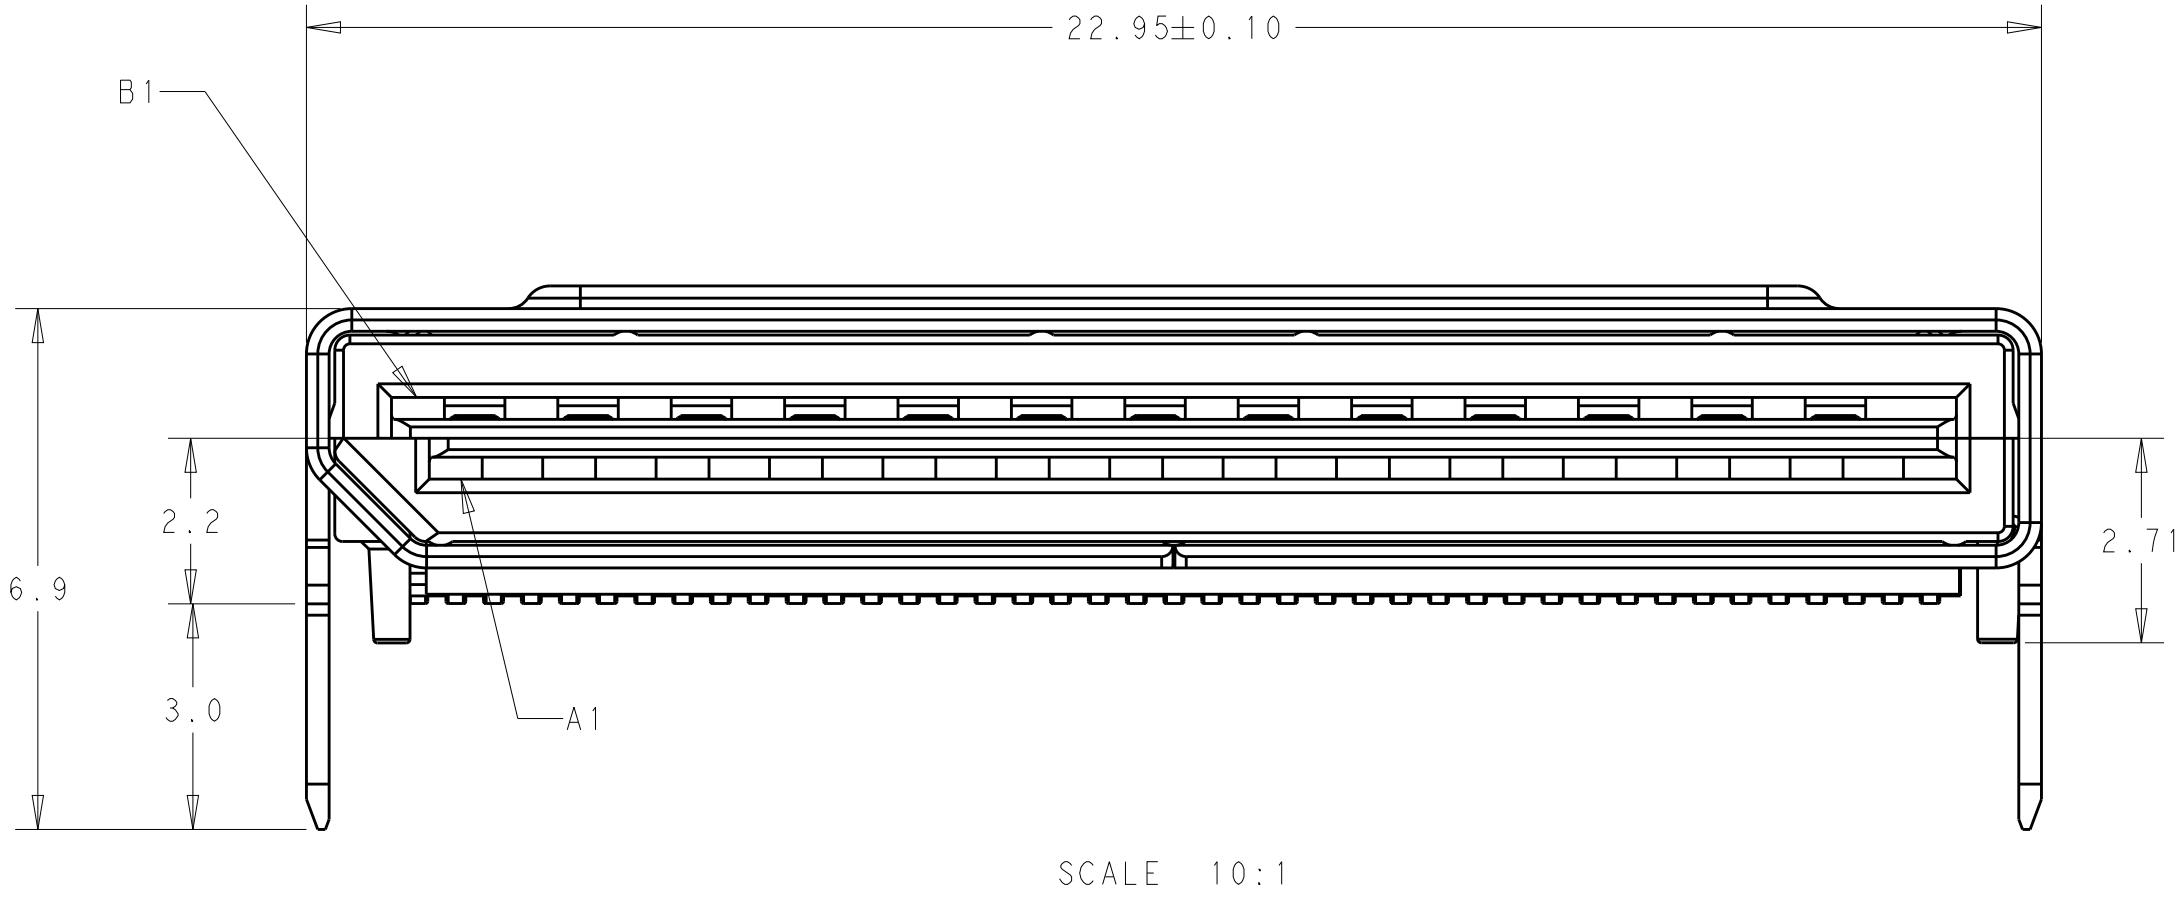

SCALE 10:1

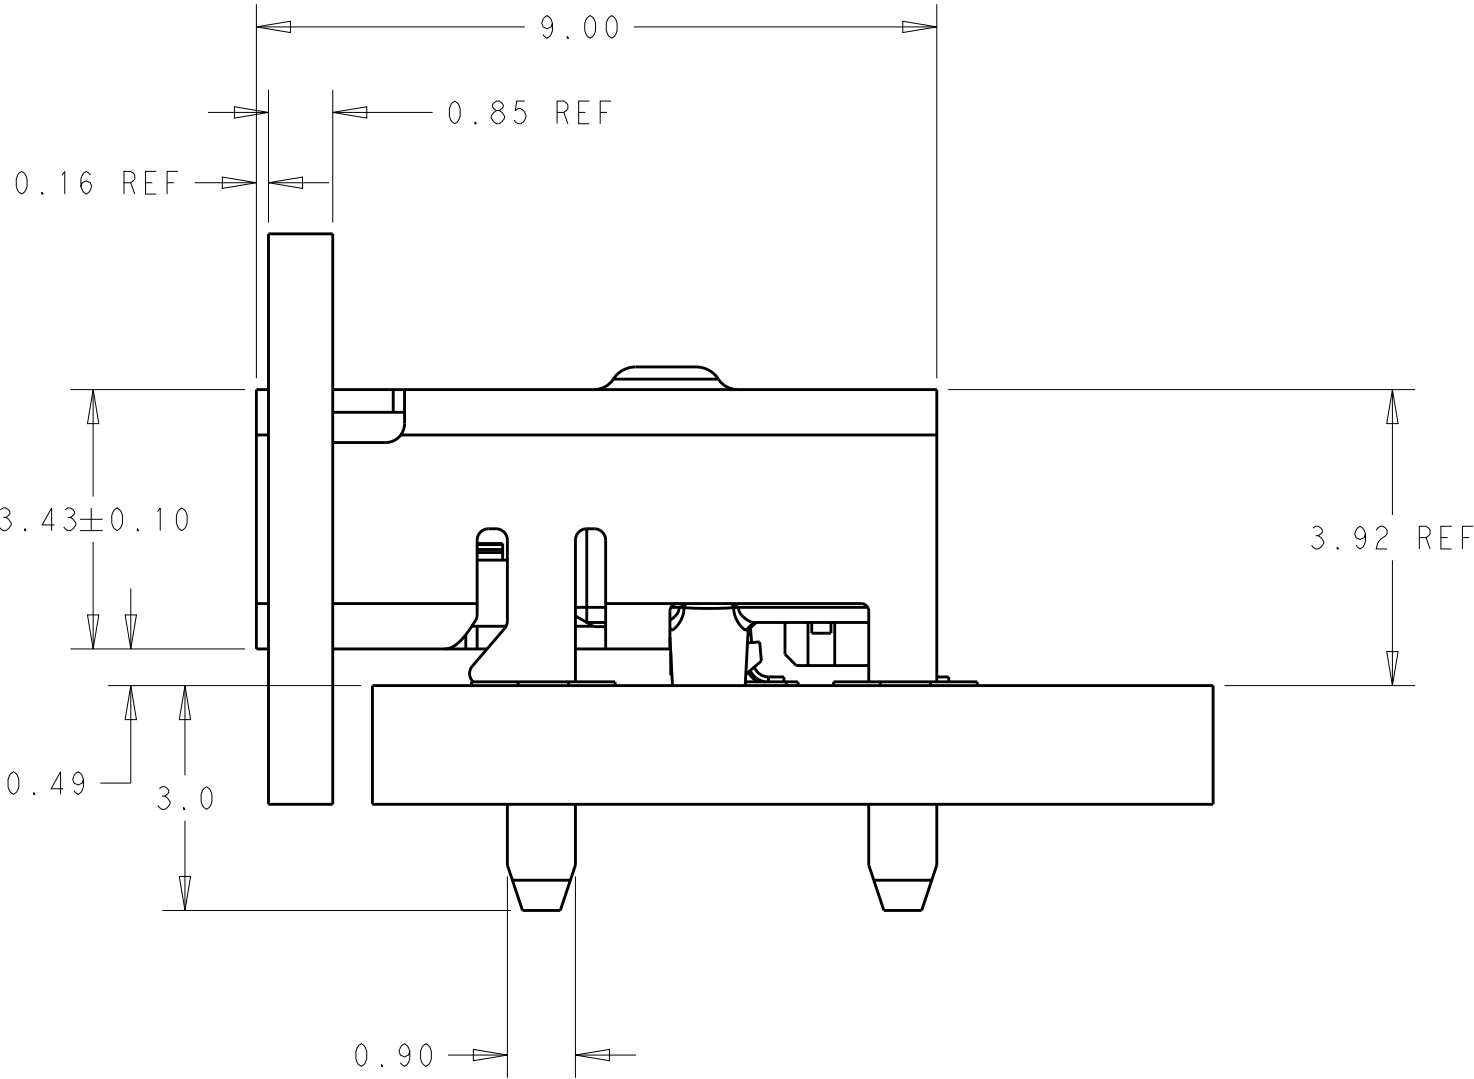


80 CIRCUIT TH ASSEMBLY
PART NUMBER: 2308577-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN VINDY LIU 08FEB2017	PART NUMBER 2308577-1	
DIMENSIONS:		CHK SEAN HAN 08FEB2017	 TE Connectivity	
mm		APVD SEAN HAN 08FEB2017		
		PRODUCT SPEC	NAME NANO PITCH I/O FIXED RIGHT ANGLE, 8X	
		108-60018		
		APPLICATION SPEC		
		114-60024		
MATERIAL SEE NOTES		FINISH SEE NOTES	SIZE A1	CAGE CODE -
			DRAWING NO. C=2308577	RESTRICTED TO -
			CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 5 REV A

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

80 CIRCUIT TAIL RECOMMENDED FOOTPRINT

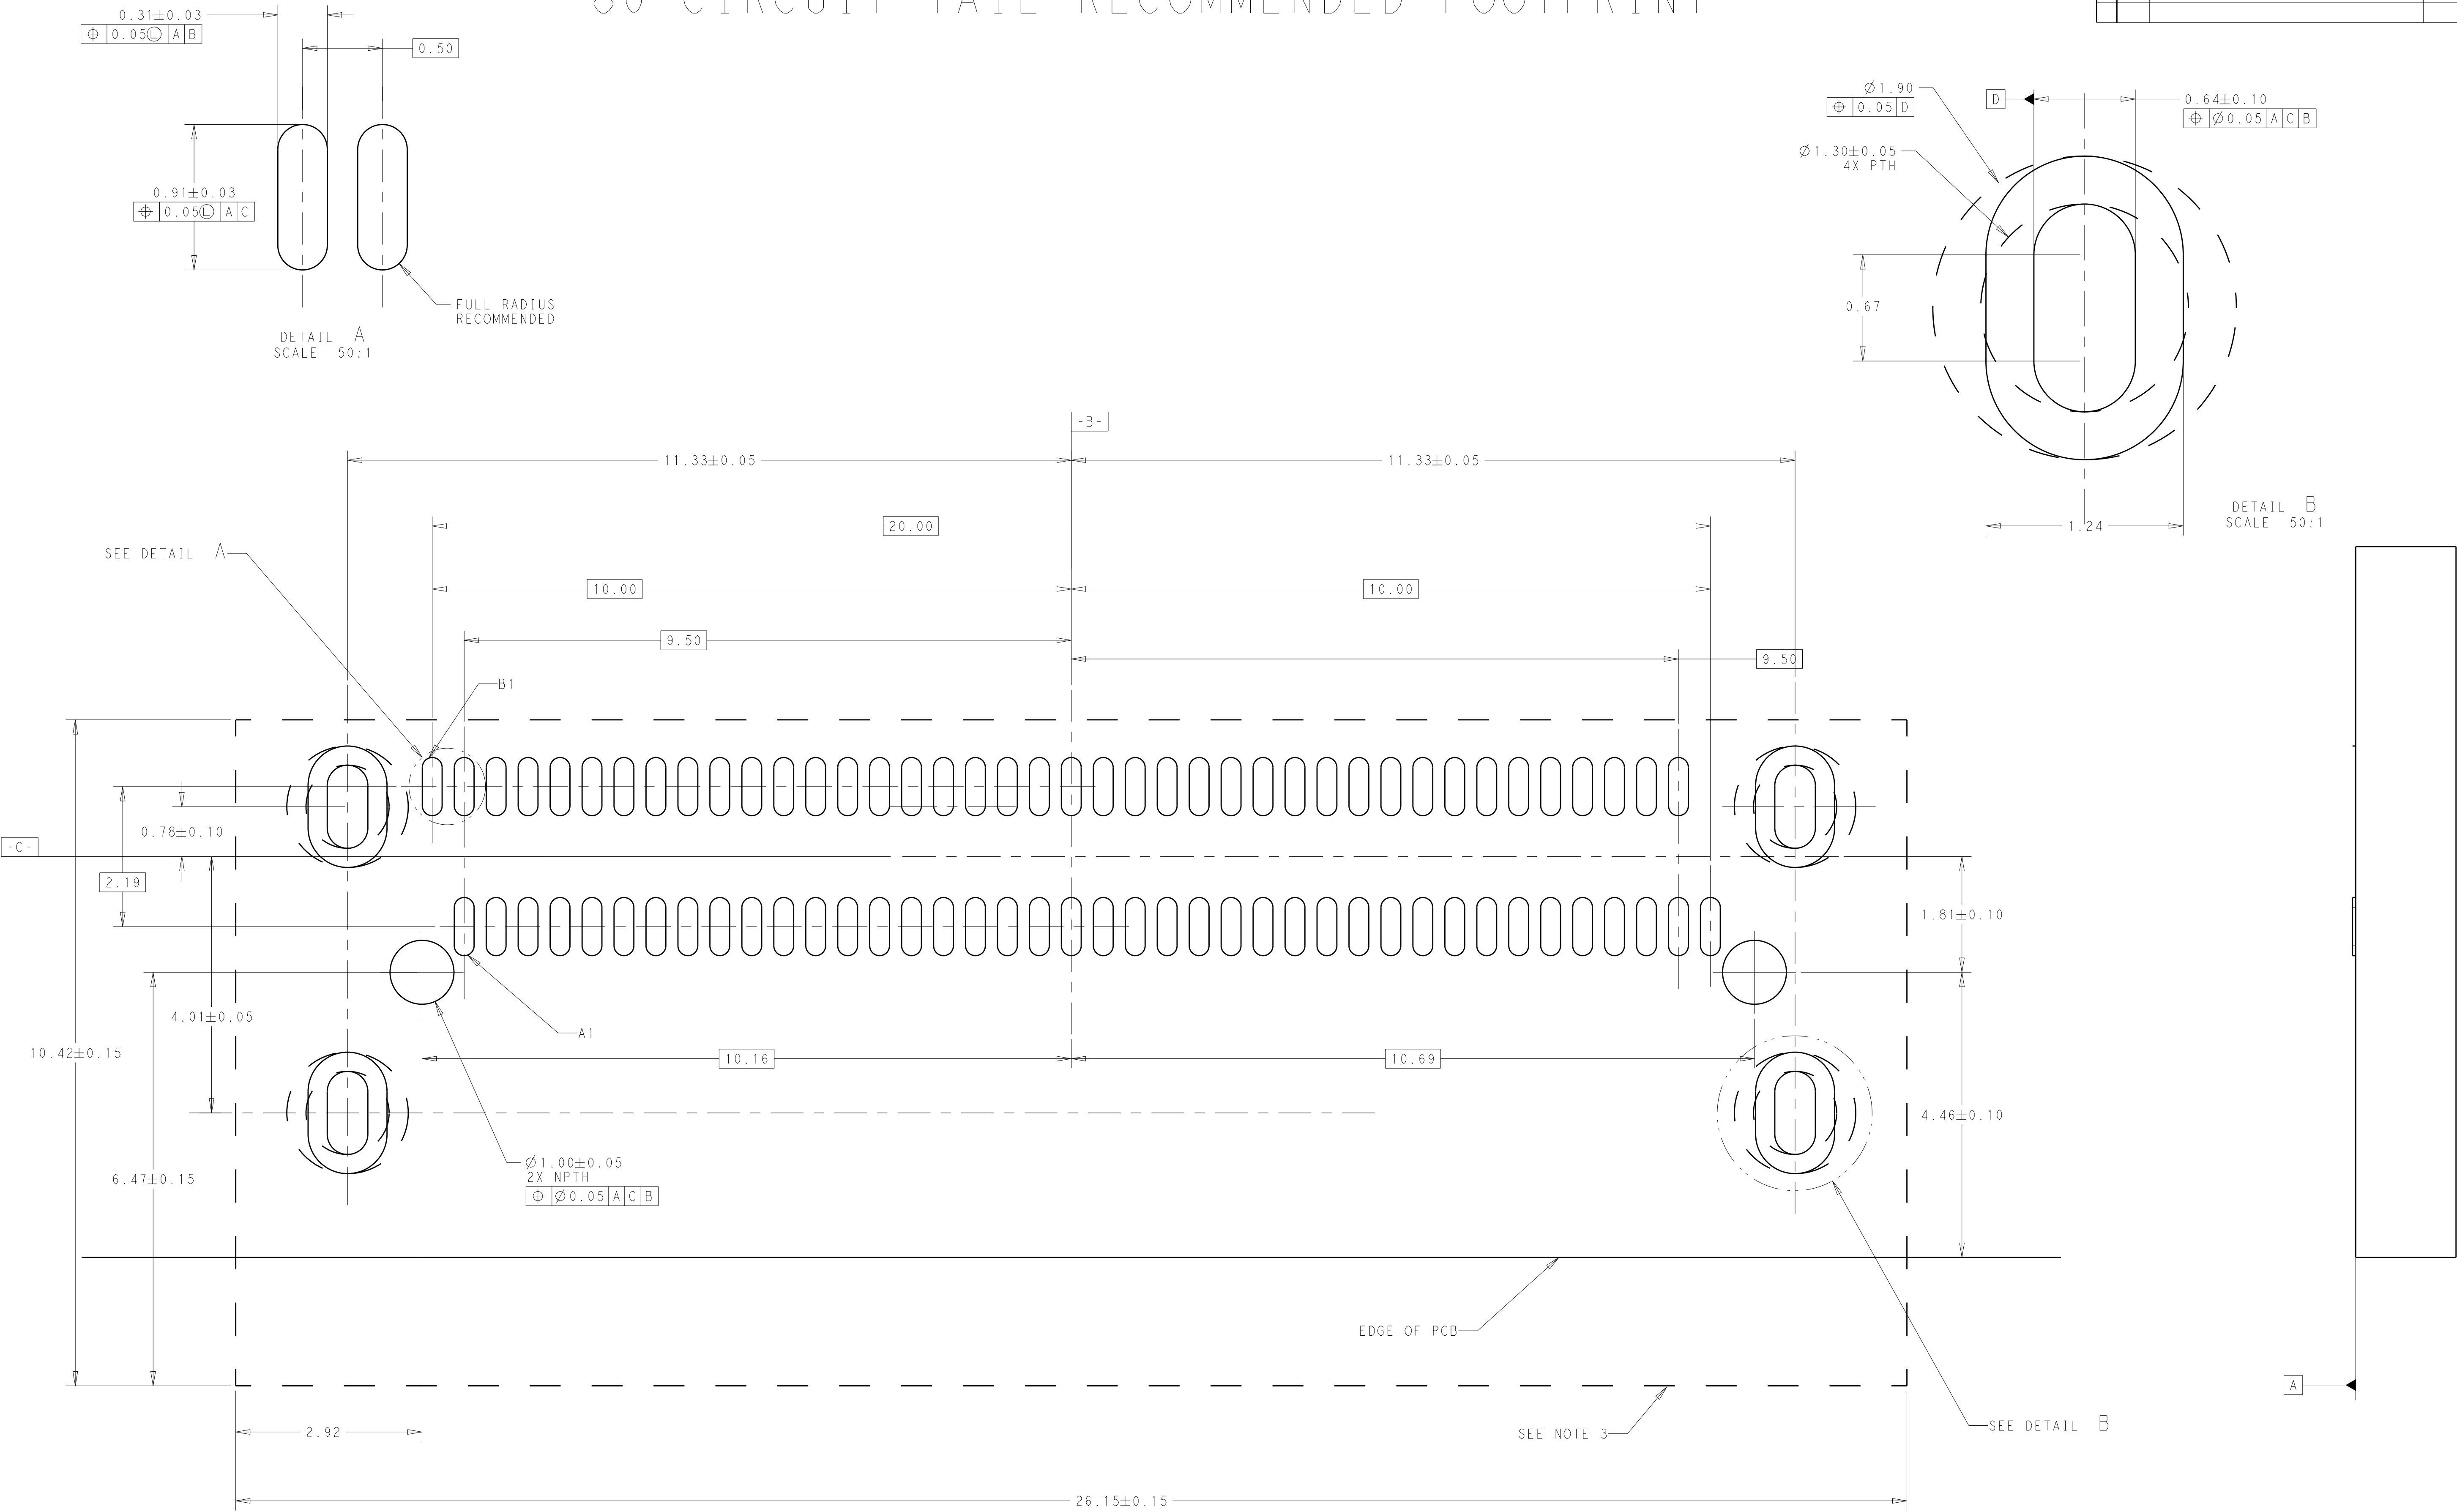

- NOTES:
1. MINIMUM RECOMMENDED SPACING IS 26.75MM.
 2. MINIMUM RECOMMENDED PCB THICKNESS: 1.57MM
 3. CONNECTOR KEEP OUT AREA.
 4. DATUM -A- ESTABLISHED FROM TOP SURFACE OF PCB.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: VINDY LIU 08FEB2017		
DIMENSIONS:		CHK: SEAN HAN 08FEB2017		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD: SEAN HAN 08FEB2017	NAME: NANO PITCH I/O FIXED RIGHT ANGLE, 8X	
	0 PLC	±	PRODUCT SPEC: 108-60018	
	1 PLC	±0.25	APPLICATION SPEC: 114-60024	
	2 PLC	±0.13	SIZE: A1	
	3 PLC	±	CAGE CODE: -	
MATERIAL: SEE NOTES	SEE NOTES	WEIGHT: -	DRAWING NO: C=2308577	
CUSTOMER DRAWING		RESTRICTED TO: -		SCALE: 4:1
		SHEET 3 OF 5		REV A

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

80 CIRCUIT SMT RECOMMENDED FOOTPRINT

D

C


B

A

C

B

A

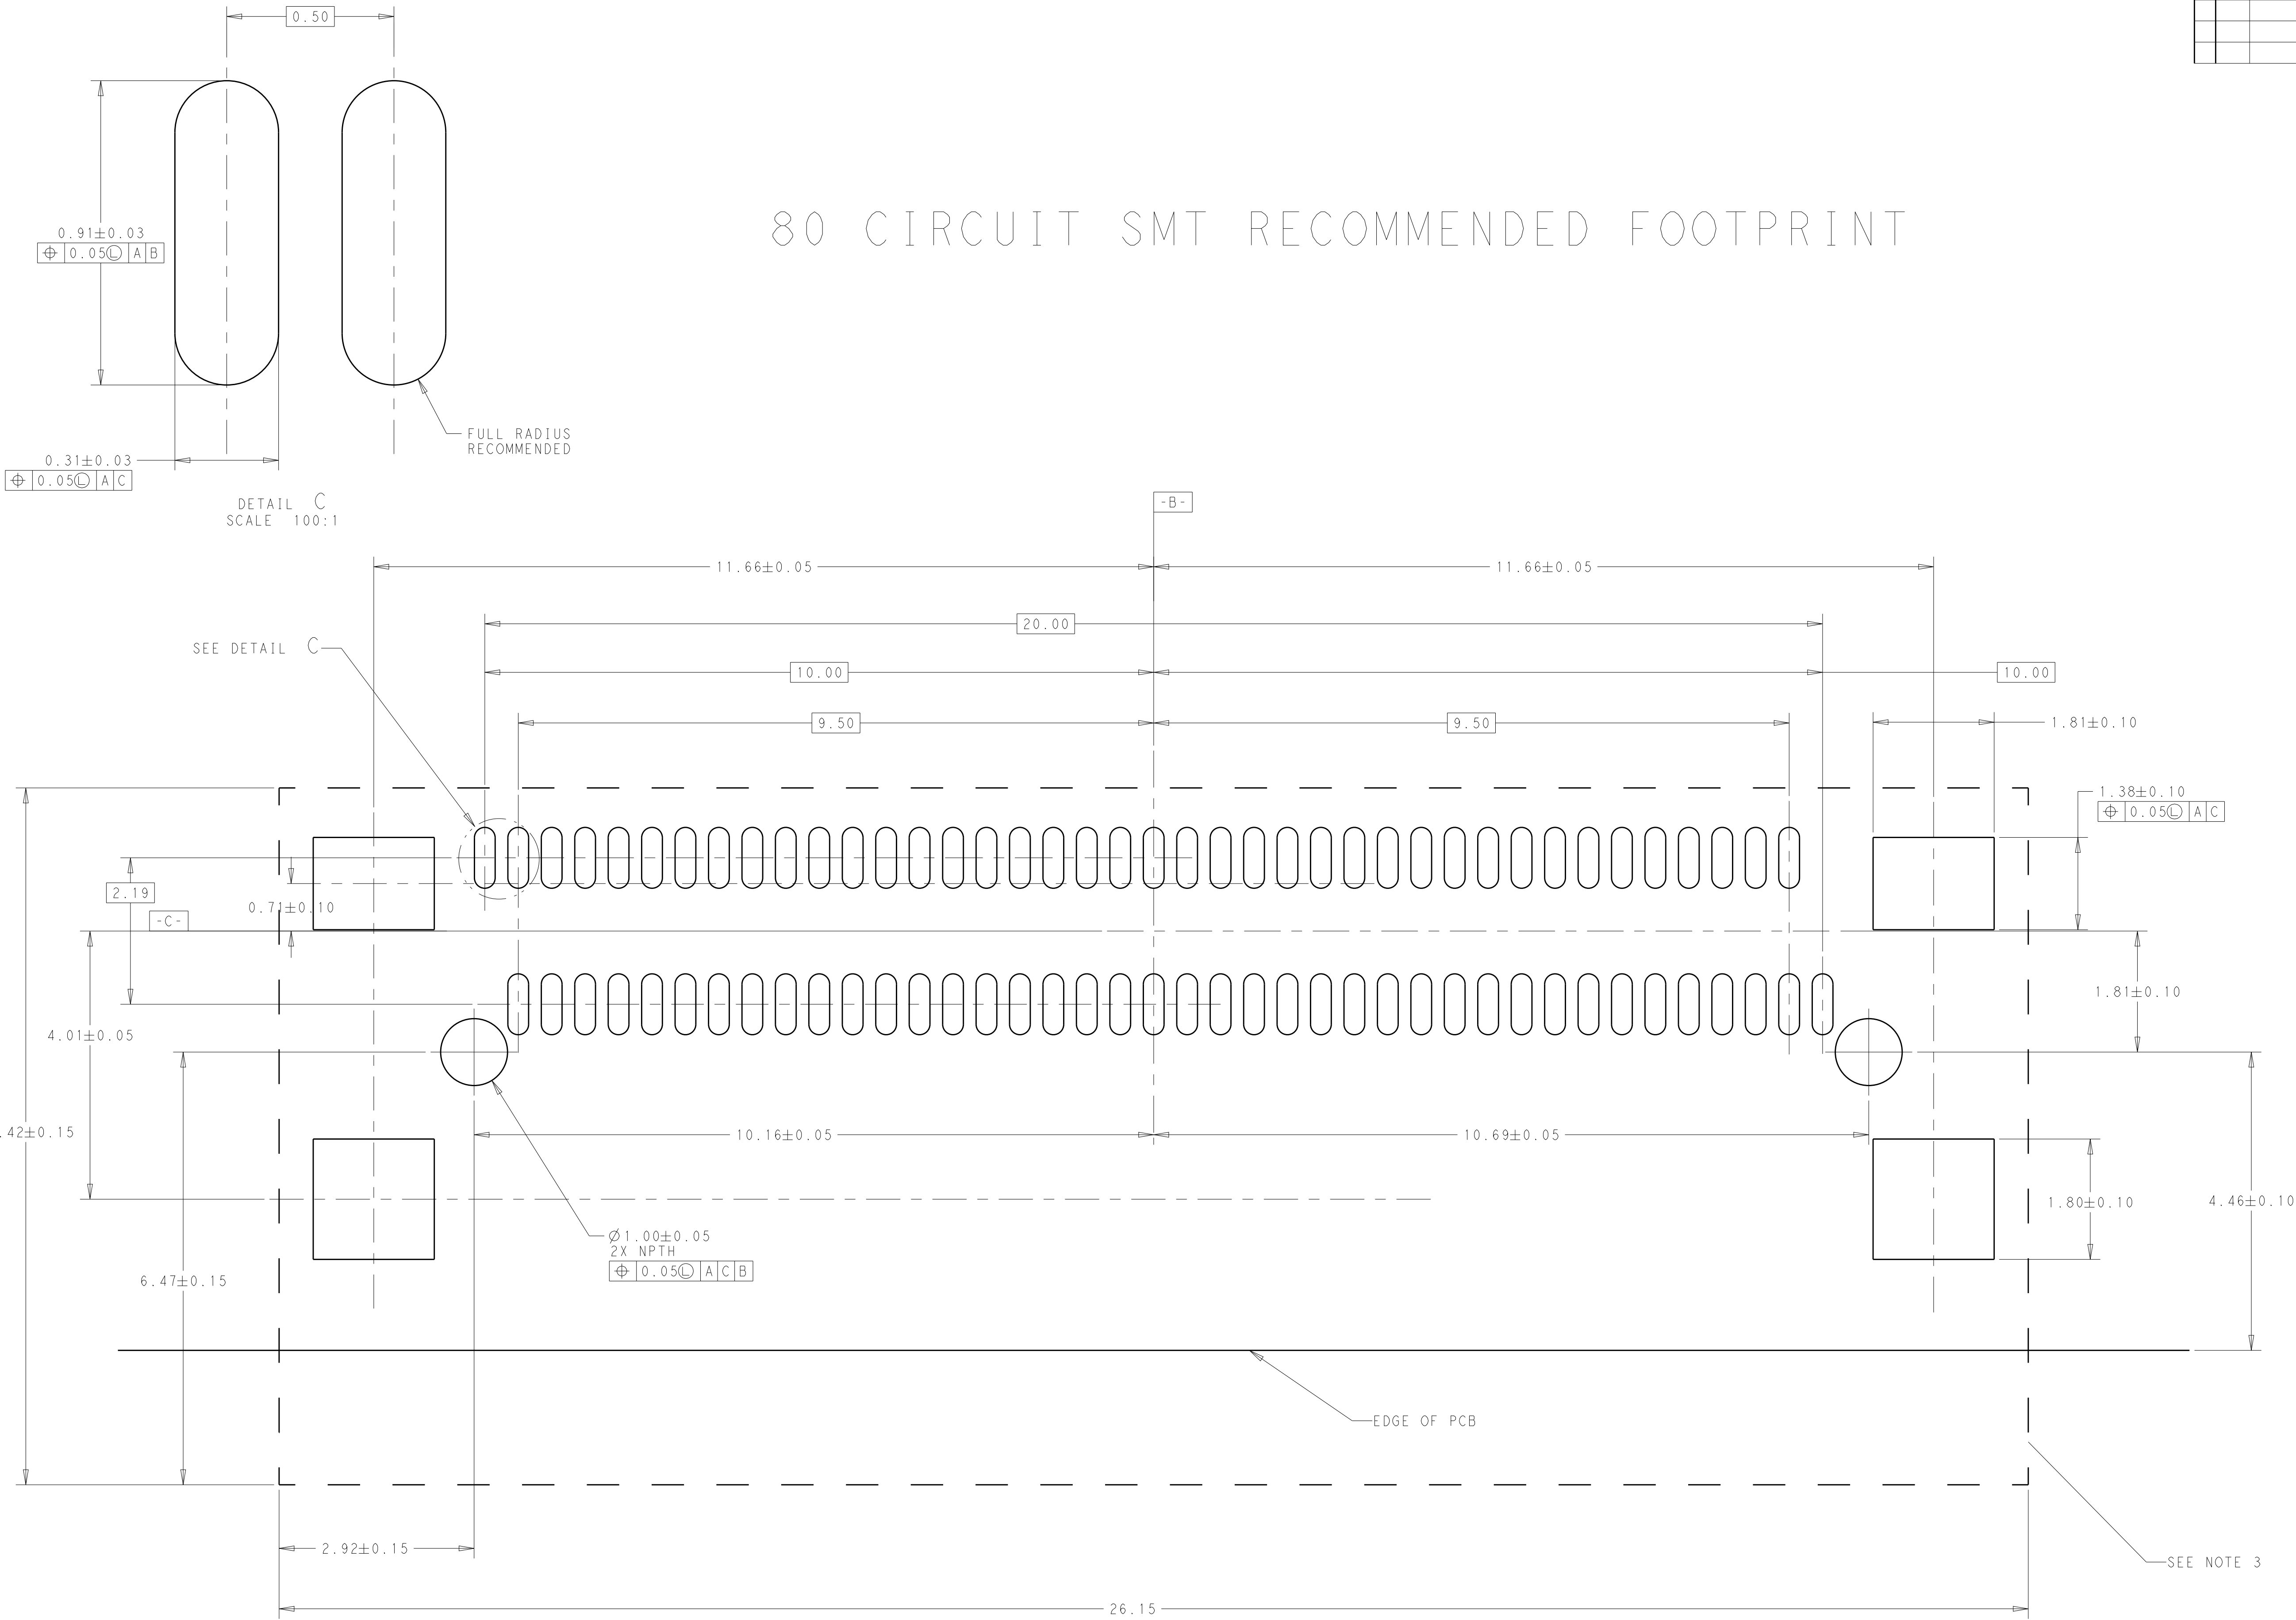


- NOTES:
- 1, MINIMUM RECOMMENDED SPACING IS 26.75MM.
 - 2, MINIMUM RECOMMENDED PCB THICKNESS: 1.57MM
 - 3, CONNECTOR KEEP OUT AREA.
 - 4, DATUM -A- ESTABLISHED FROM TOP SURFACE OF PCB.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: VINDY LIU 08FEB2017	TE Connectivity	
		CHK: SEAN HAN 08FEB2017		
DIMENSIONS:		APVD: SEAN HAN 08FEB2017	NAME: NANO PITCH I/O FIXED RIGHT ANGLE, 8X	
mm		PRODUCT SPEC: 108-60018		
		APPLICATION SPEC: 114-60024	SIZE: A1	
		FINISH: SEE NOTES		
MATERIAL: SEE NOTES		WEIGHT: -	CAGE CODE: -	
		CUSTOMER DRAWING		
		SCALE: 4:1	SHEET: 4 OF 5	
		REV: A		

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

80 CIRCUIT PANEL OPENING

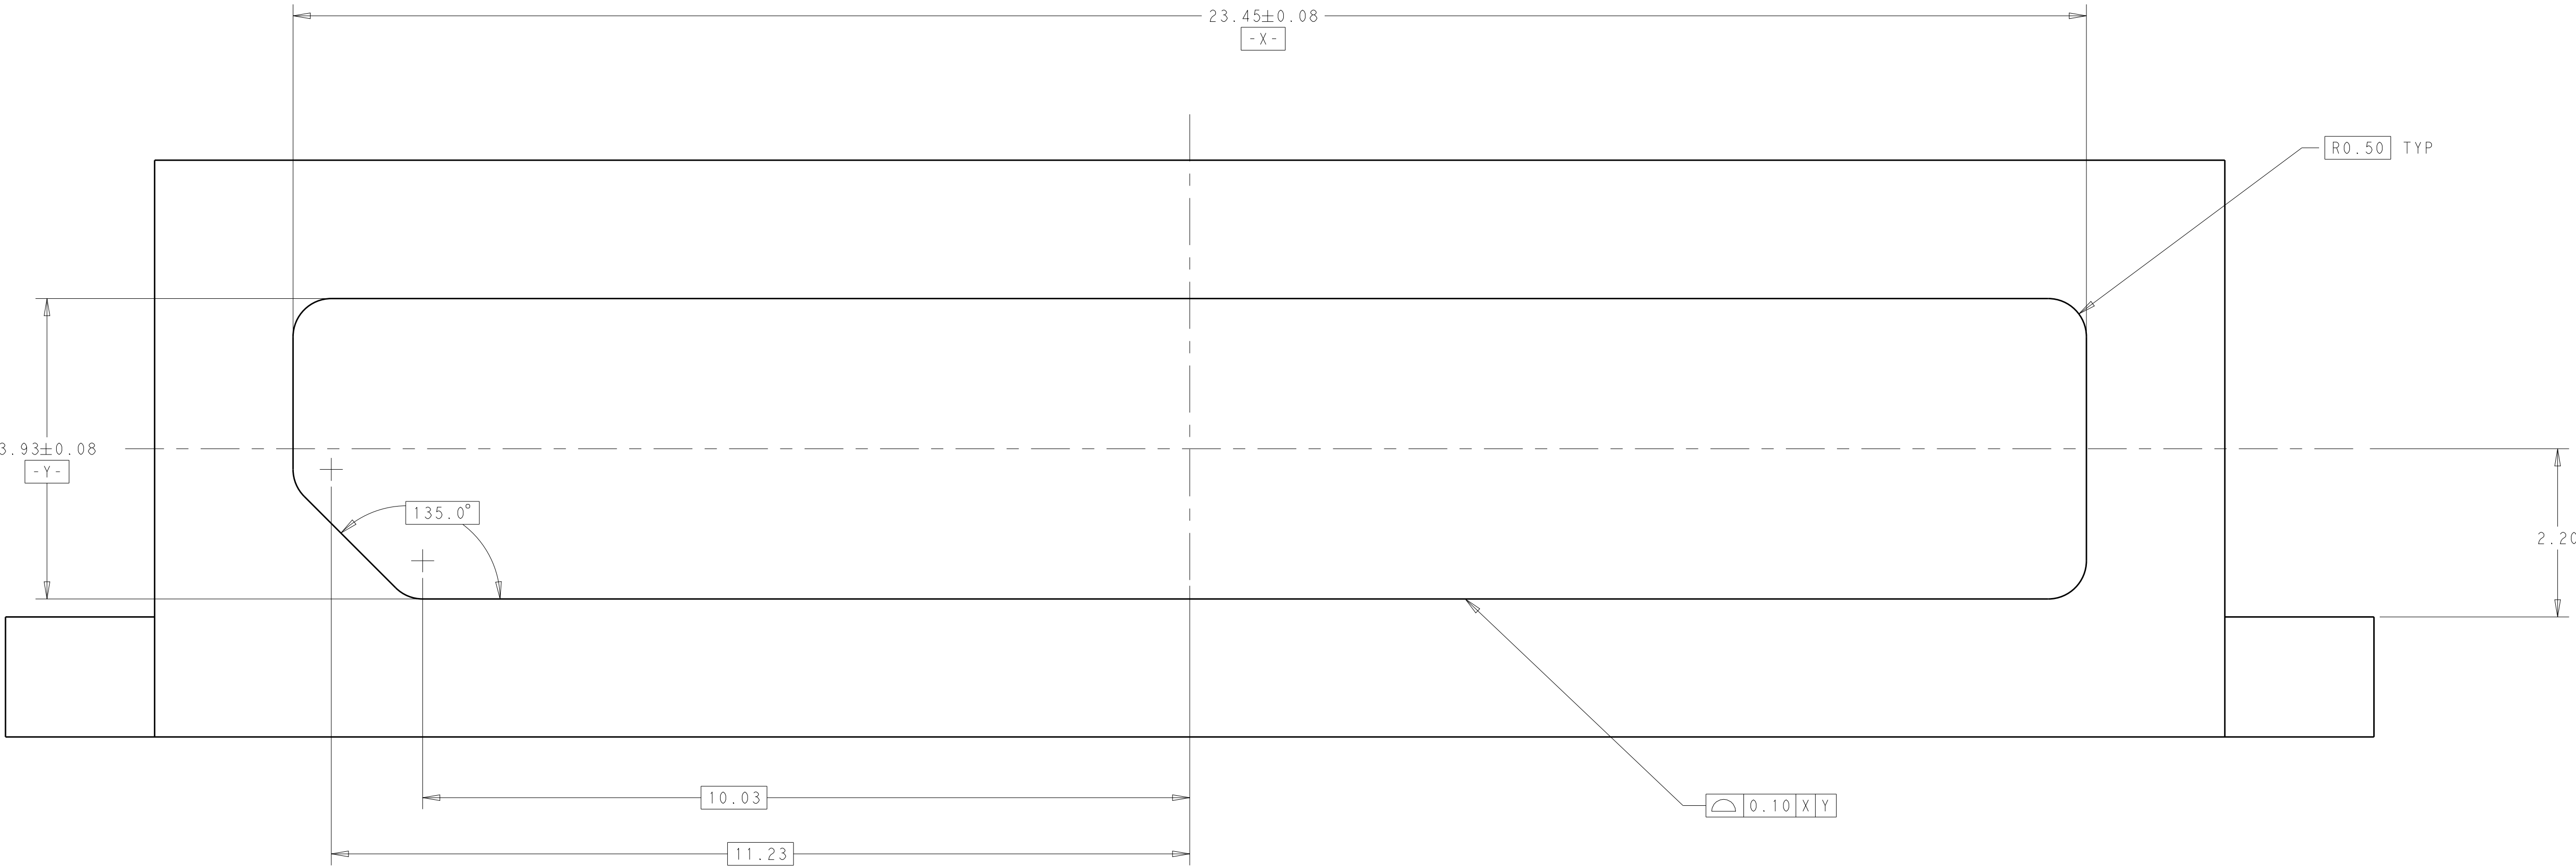

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN VINDY LIU 08FEB2017		
		CHK SEAN HAN 08FEB2017		
DIMENSIONS:		APVD SEAN HAN 08FEB2017	NAME NANO PITCH I/O FIXED RIGHT ANGLE, 8X	
mm		PRODUCT SPEC		
	0 PLC	±	SIZE A1	
	1 PLC	±0.25		
	2 PLC	±0.13		
	3 PLC	±		
ANGLES		APPLICATION SPEC	CAGE CODE -	
FINISH		114-60024		
MATERIAL SEE NOTES		WEIGHT -	DRAWING NO. 2308577	
		CUSTOMER DRAWING		
			SCALE 4:1	SHEET 5 OF 5
			REV A	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru