



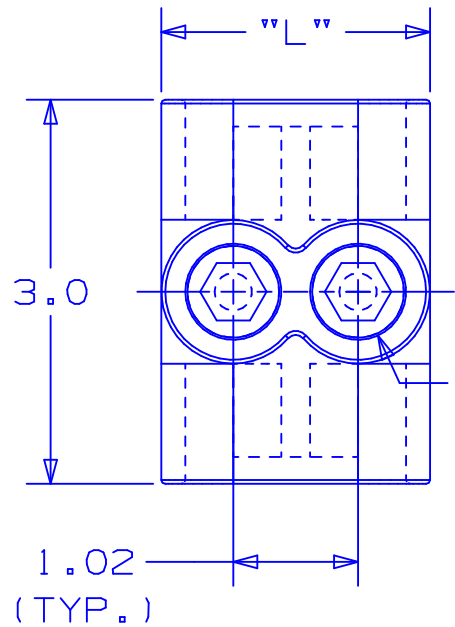


CLAMPING SCREW  
ACCESS PORT  
(TYP)

.88 DIA.  
(TYP.)

CONDUCTOR  
PORT  
(TYP)

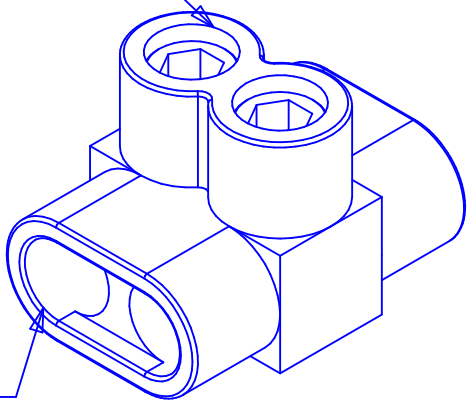

TWO PORT CONNECTOR BLOCK SHOWN  
WITH PLASTIC CLOSURE PLUGS  
REMOVED. SEE TABLE FOR DIMENSIONS  
OF PARTS WITH ADDITIONAL PORTS.

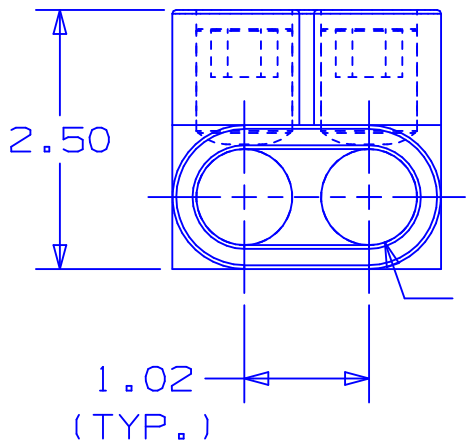

.88 DIA.  
(TYP.)

1.02  
(TYP.)

NOTES:

1. UL 486B LISTED. DUAL RATED CU9AL FOR ALUMINUM OR COPPER CONDUCTORS. MEETS OR EXCEEDS ANSI C119.4
2. WIRE RANGE: 350 MCM-#10 AWG STR, #10 AWG SOL. ONLY ONE CONDUCTOR PER PORT ALLOWED.
3. STRIP LENGTH: 1.00 +.06/-0
4. HEX KEY SIZE: 3/8", TIGHTENING TORQUE 375 IN-LB.
5. VOLTAGE RATING: 600 V. MAX. BUILDING WIRE, 1000 V. MAX. IN SIGNS & FIXTURES.
6. TEMPERATURE RATING: 90° C.
7. CONNECTOR BLOCK BODY, AND CLAMPING SCREWS ARE MADE FROM ALUMINUM. PORTS IN CONNECTOR BLOCK ARE PREFILLED WITH AN OXIDE-INHIBITING COMPOUND.
8. INSULATION MATERIAL IS CLEAR PVC.
9. CLAMPING SCREW ACCESS PORTS AND ALL WIRE ENTRY PORTS ARE PROVIDED WITH REMOVABLE PLASTIC CLOSURE PLUGS.
10. ALL DIMENSIONS SHOWN ARE NOMINAL.
11. PACKAGE QTY:   -4 = 4 PCS.  
                          -3 = 3 PCS.  
                          -2 = 2 PCS.

| PART NUMBER | # CONDUCTOR PORTS | DIM "L" |
|-------------|-------------------|---------|
| PCSB350-2-4 | 2                 | 2.22    |
| PCSB350-3-4 | 3                 | 3.24    |
| PCSB350-4-3 | 4                 | 4.25    |
| PCSB350-5-3 | 5                 | 5.28    |
| PCSB350-6-2 | 6                 | 6.30    |
| PCSB350-7-2 | 7                 | 7.31    |
| PCSB350-8-2 | 8                 | 8.33    |



LISTED  
509D

C41247\_03

|     |      |      |     |                                                                                                                          |       |      |     |  |                                                                                                      |
|-----|------|------|-----|--------------------------------------------------------------------------------------------------------------------------|-------|------|-----|--|------------------------------------------------------------------------------------------------------|
| --  | --   | --   | --  | WIDTH DIM WAS: 3.13; REVISED NOTE 9.                                                                                     | --    | --   | --  |  | <b>PANDUIT</b> CORP.      TINLEY PARK, ILLINOIS<br>MULTI-TAP INSULATED CONNECTORS<br>PCSB 350 SERIES |
| 03  | 6/04 | JHNU |     | CHANGED DIM "L" IN TABLE: 2.22 WAS 2.25<br>3.24 WAS 3.25, 5.28 WAS 5.25, 6.30 WAS 6.25<br>7.31 WAS 7.25, & 8.33 WAS 8.25 |       |      |     |  |                                                                                                      |
| 02  | 9/99 | ES   | RLS | NOTE 4 WAS HEX KEY SIZE: 5/16",<br>TIGHTENING TORQUE 275 IN-LB.                                                          | 07932 | LCA  | TRO |  |                                                                                                      |
| 01  | 8/99 | ES   | RLS | ADDED 509D TO UL SYMBOL,<br>UPDATED NOTES 2, 4 & 5.                                                                      | 07875 | JCJ  | TRO |  |                                                                                                      |
| REV | DATE | BY   | CHK | DESCRIPTION                                                                                                              | ECN # | CUST | PM  |  | DRAWN BY   MS   CHK'D   RLS   SCALE   N/A   DRAWING NO.   C41247                                     |

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)