

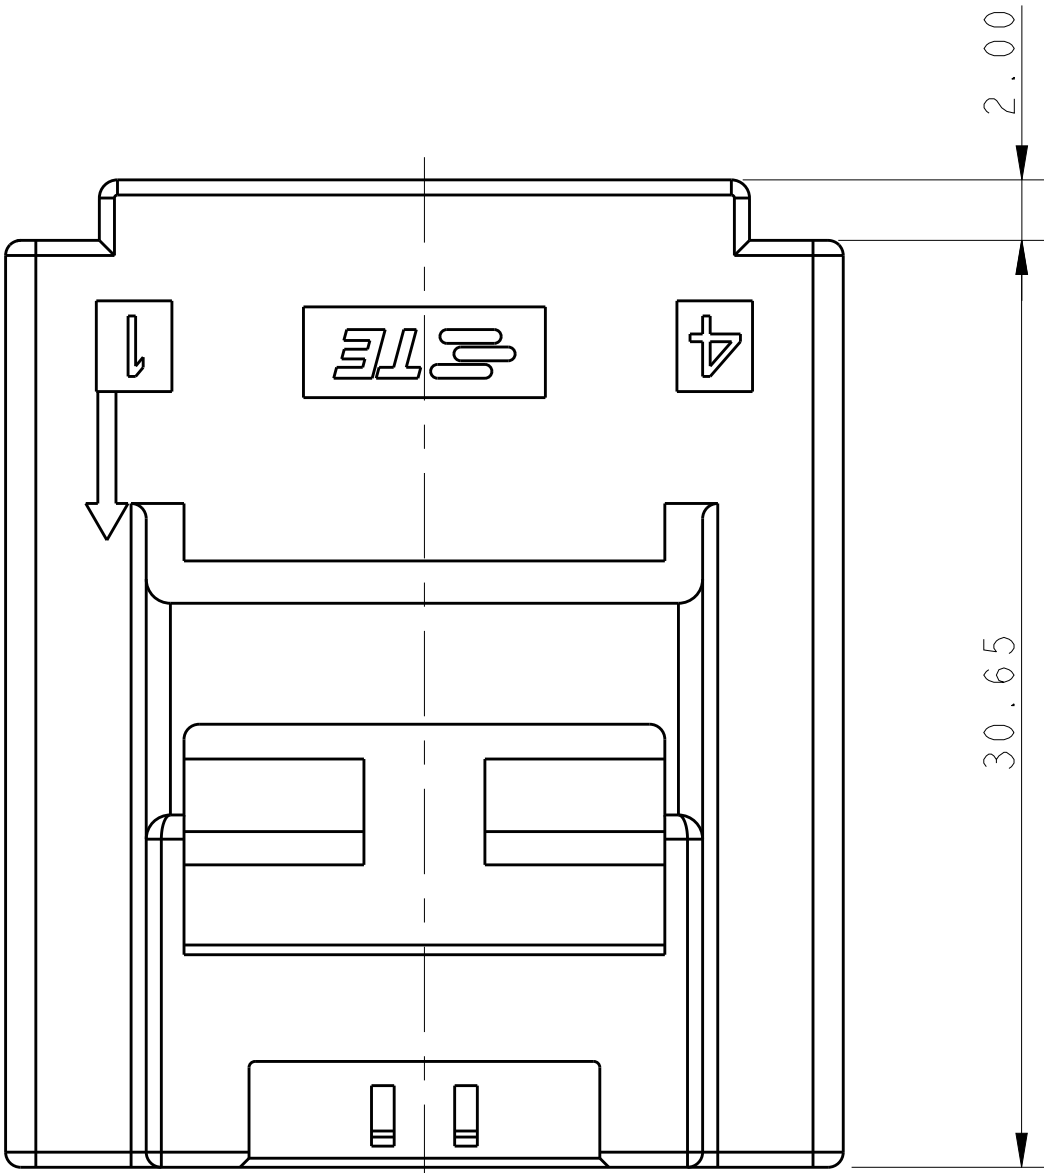
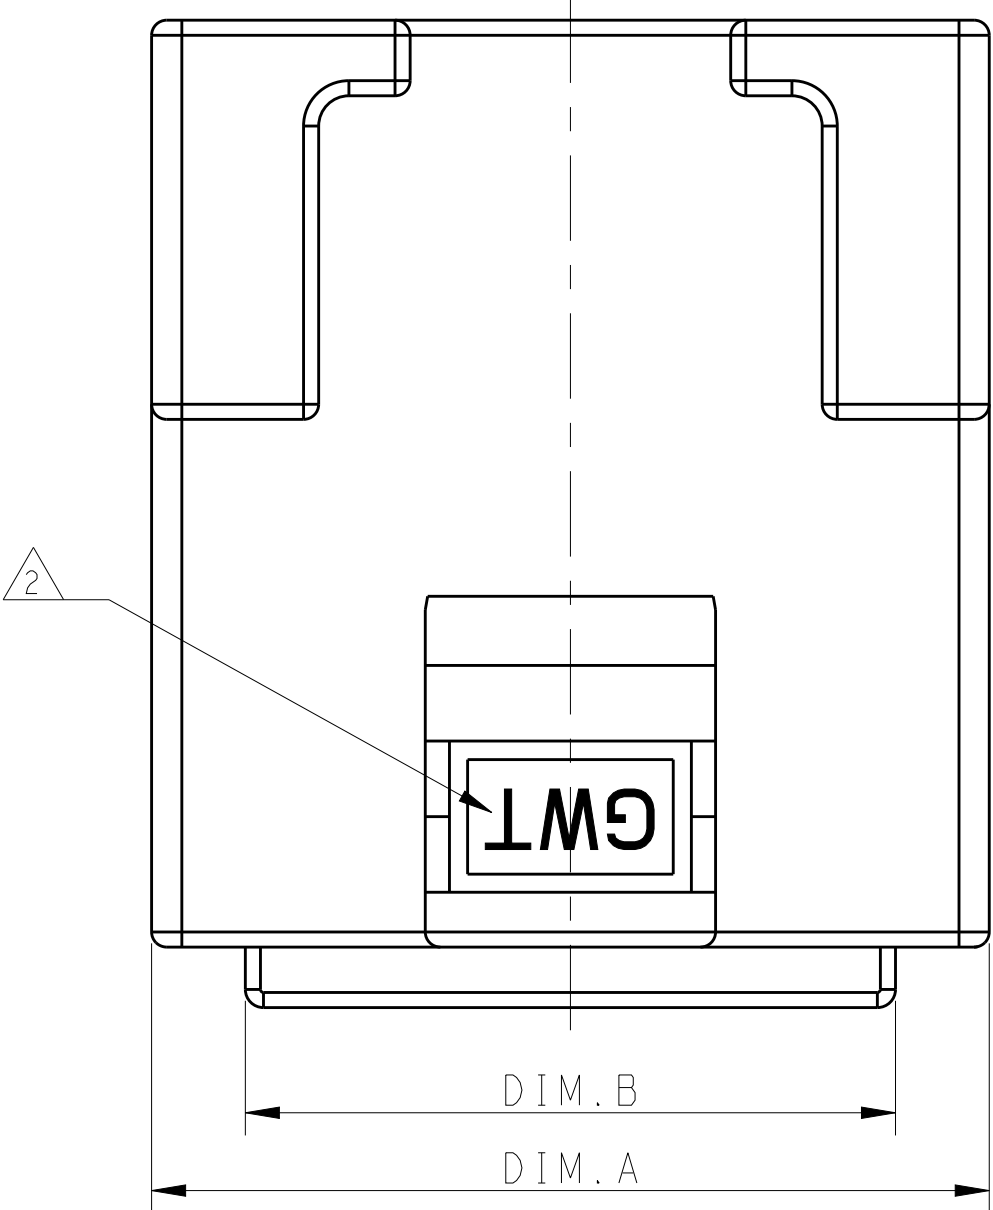
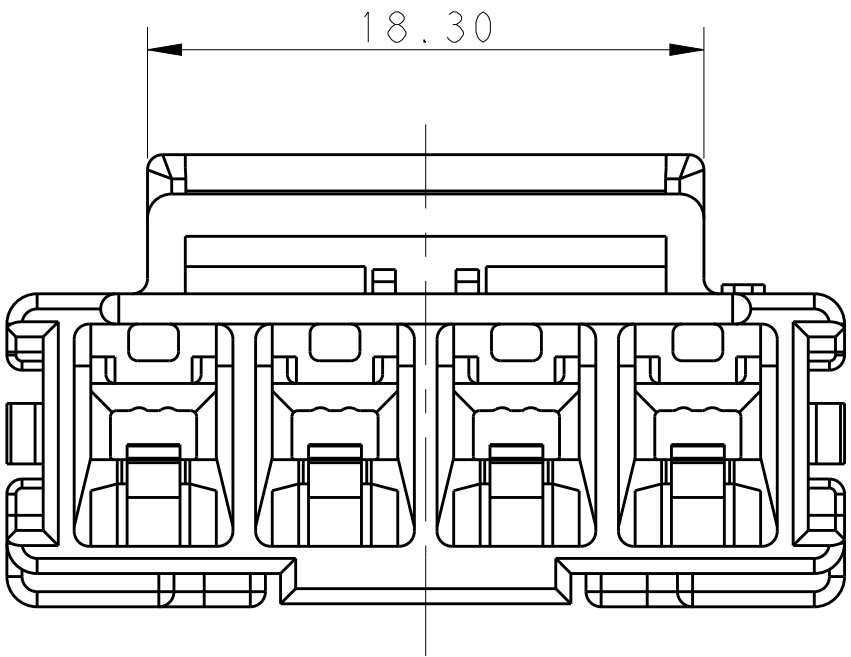


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			B	REVISED PER ECR-16-003314	18JUL2016	BW	GJ
			-	-	-	-	-

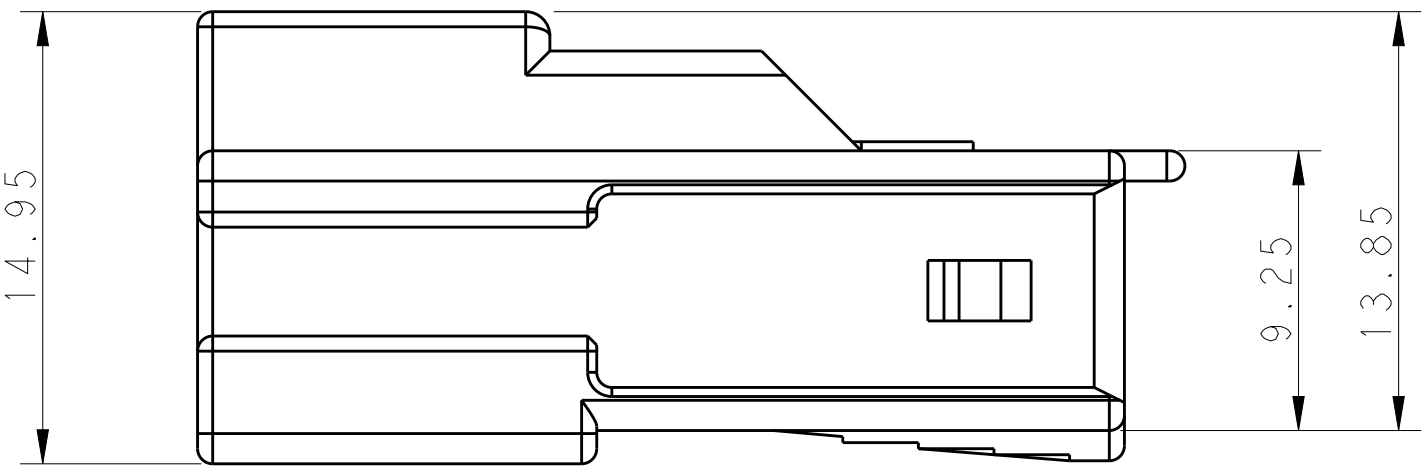

POS.	DIM.A	DIM.B	DIM.C
1*5	33.70	27.50	31.30
1*4	27.70	21.50	25.30
1*3	21.70	15.50	19.30
1*2	15.70	9.50	13.30








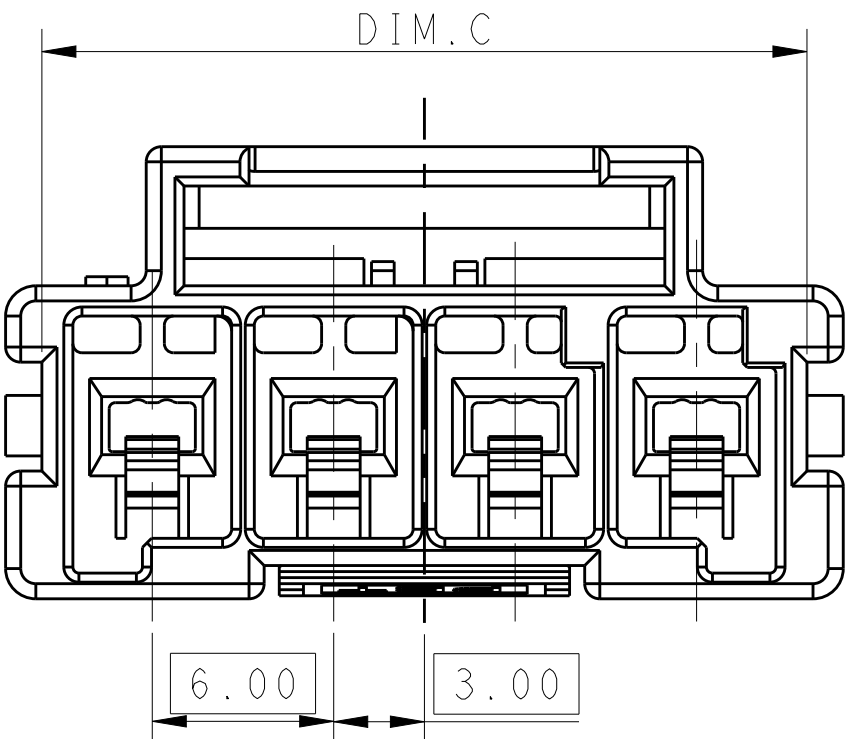


1. MATERIAL:
LEVEL A:PA6 GLASS FILLED,COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF
NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION
DETAILED IN IEC 60335-1, SECTION 30 (GWT),UL 94V-0
LEVEL B:PBT GLASS FILLED,HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN
A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026
AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY,
UL 94V-0
2. MATERIAL MARK:
LEVEL A:GWT,LEVEL B:HWT
3. APPLICABLE CONTACT P/N
TAB CONTACT:1971238/1971780/82/84/86/88-*,2238067-*
4. MATING CONN, P/N
PLUG HSG:*-2232265-
TPA (LOCK PLATE):*-1971777-*

5. This product has not completed validation testing.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TOMMY WU		26MAR2013		 TE Connectivity	
		CHK	HAPYE WU		26MAR2013			
DIMENSIONS:	mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	YUHHONG MAO		26MAR2013	
		0 PLC ±0.35		PRODUCT SPEC		NAME		
		1 PLC ±0.25		108-106118		CAP HOUSING,FREE HANGING,SINGLE ROW		
		2 PLC ±0.25		APPLICATION SPEC		POWER TRIPLE LOCK		
		3 PLC ±0.25		114-106118		-		
		4 PLC ±0.25				SIZE		
ANGLES ±0.25		FINISH		WEIGHT		CAGE CODE		
MATERIAL		-		-		DRAWING NO		
-		-		-		RESTRICTED TO		
				A100779		C=2232358		
				Customer Drawing		SCALE		
						SHEET		
						1 OF 2		
						REV B		

LOC		DIST		REVISIONS					
-		-		P	LTR	DESCRIPTION	DATE	DWN	APVD
				-	-	SEE SHEET 1	-	-	-

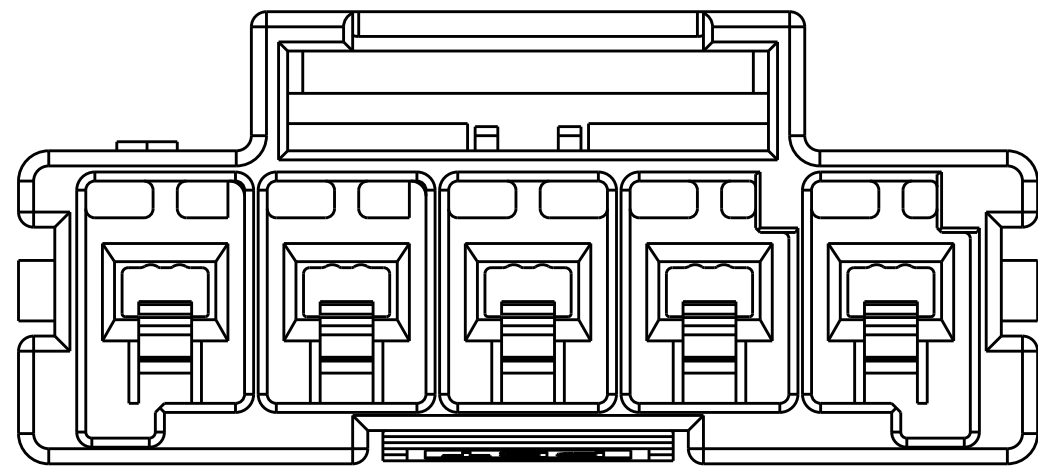
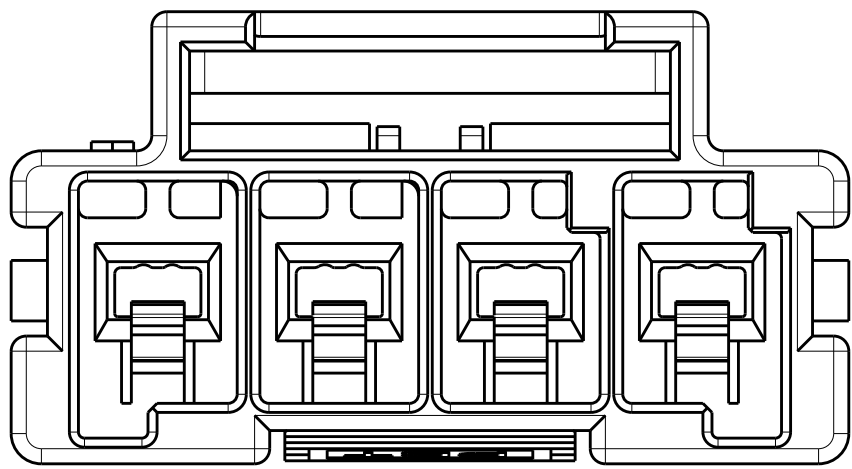
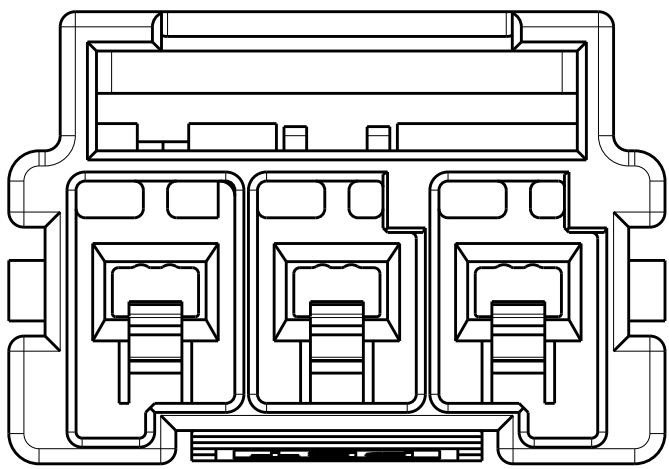
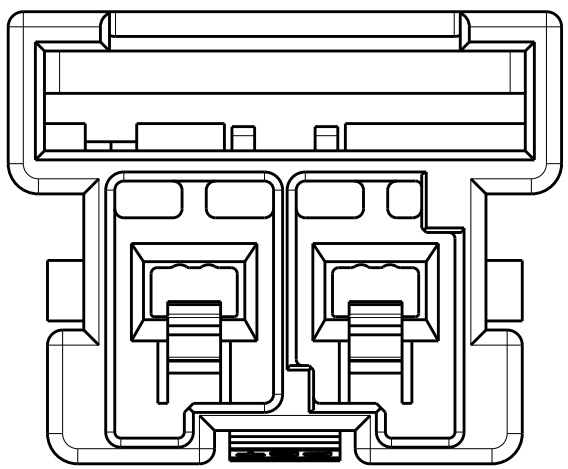
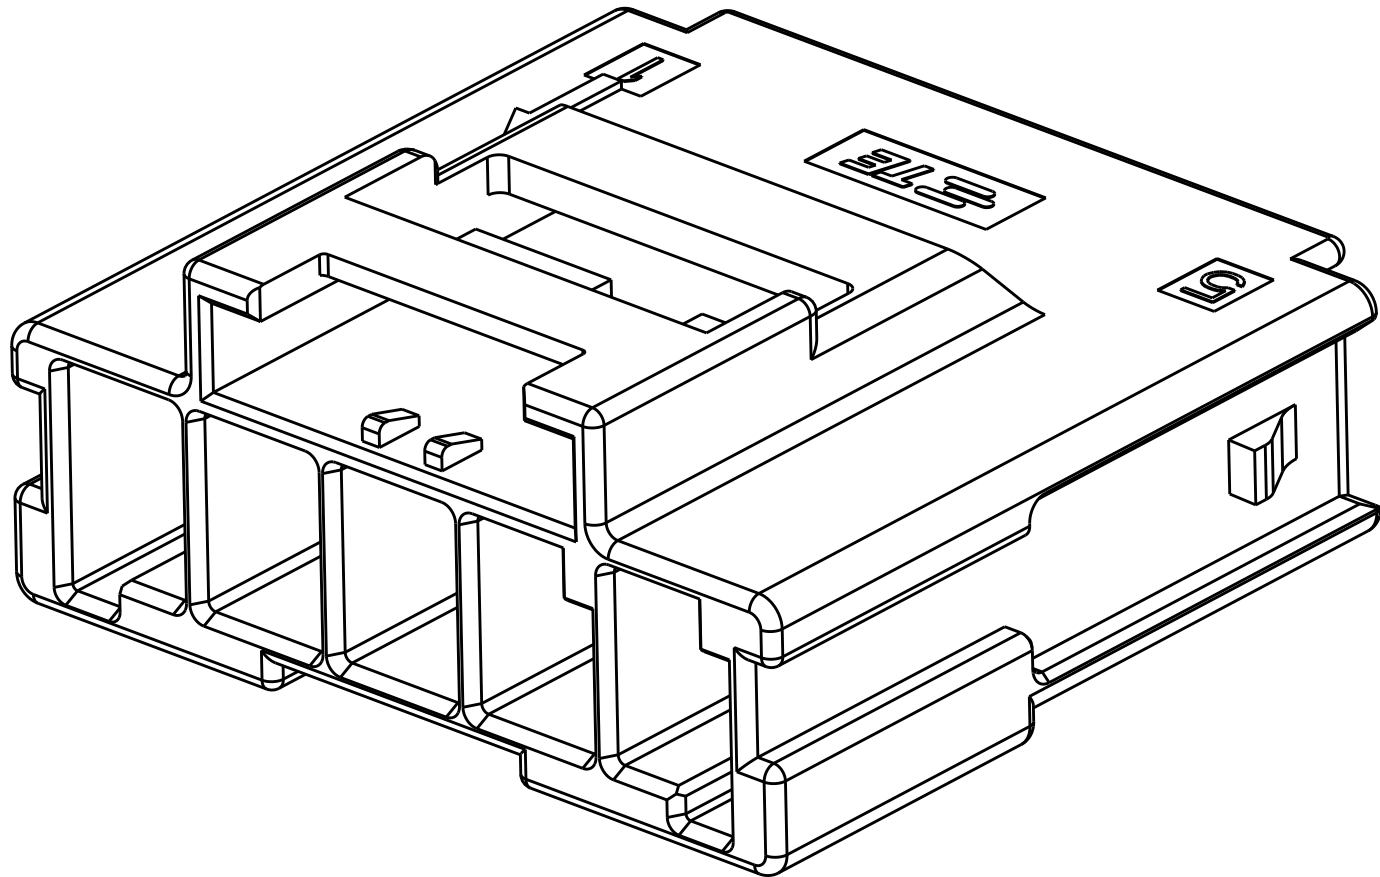
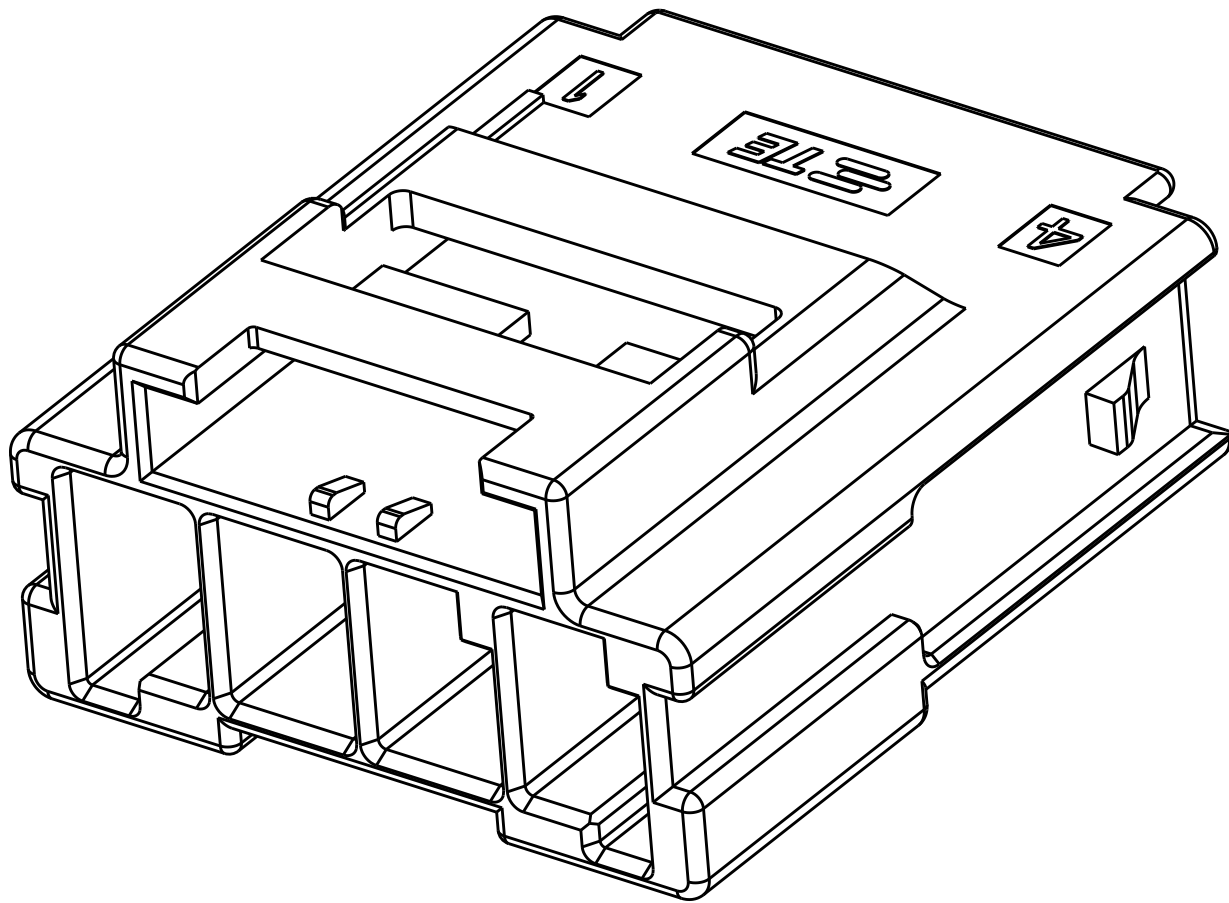
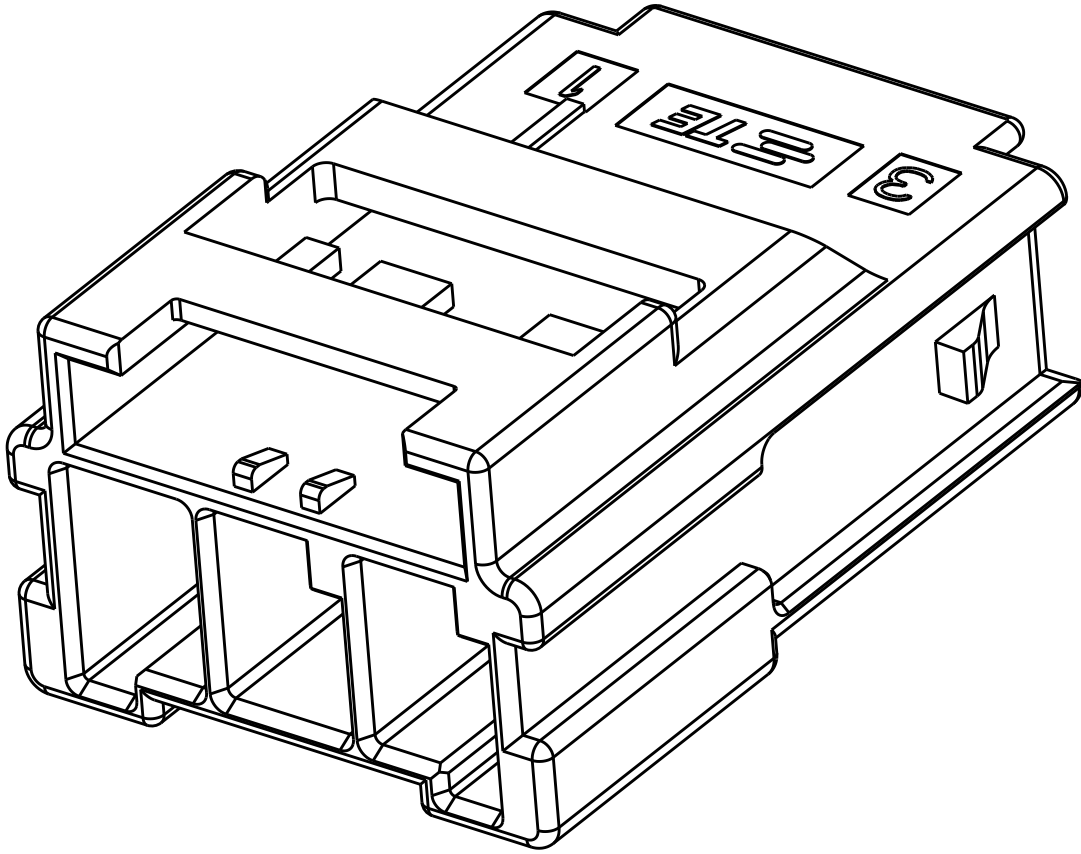
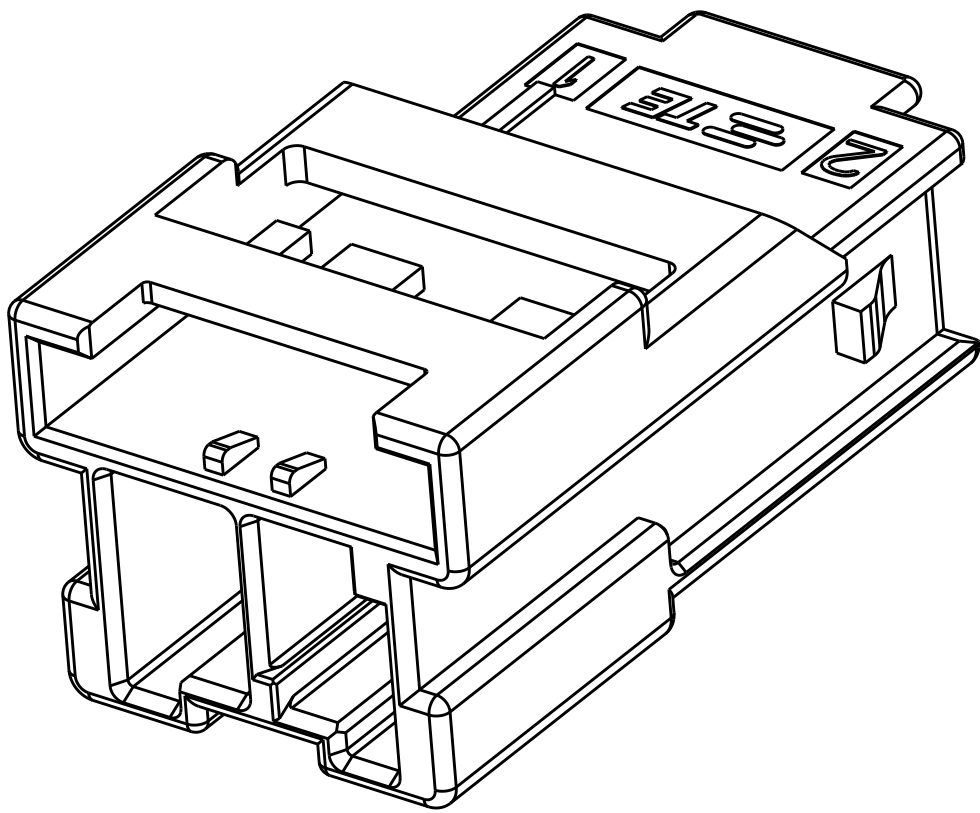


1*2 POSITIONS

1*3 POSITIONS

1*4 POSITIONS

1*5 POSITIONS

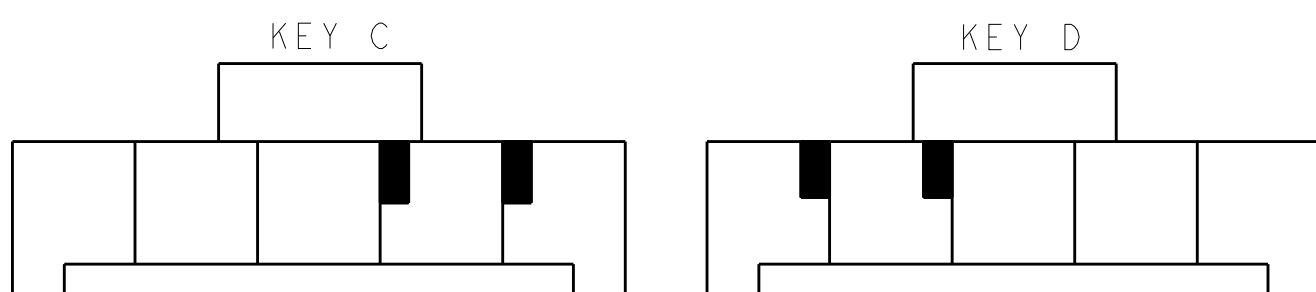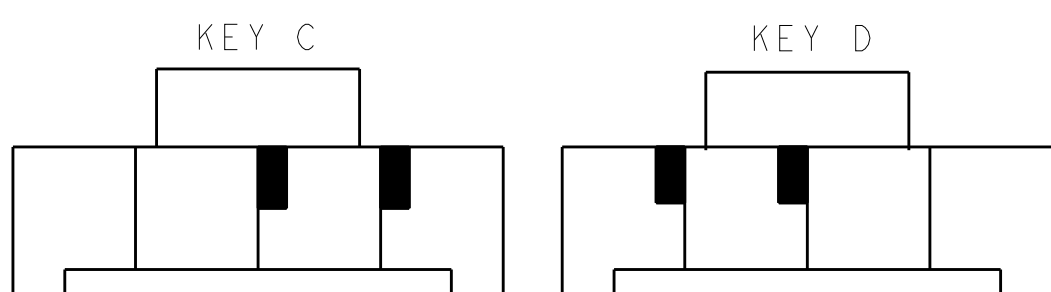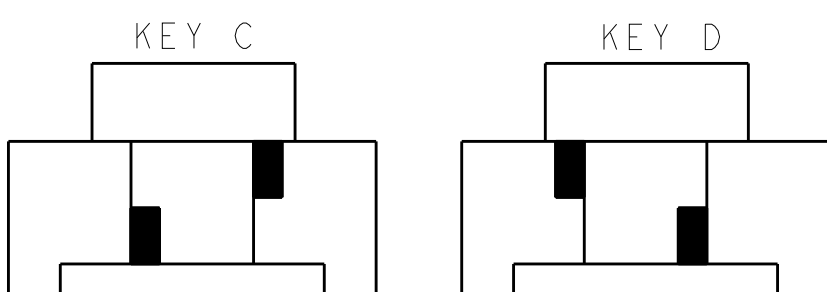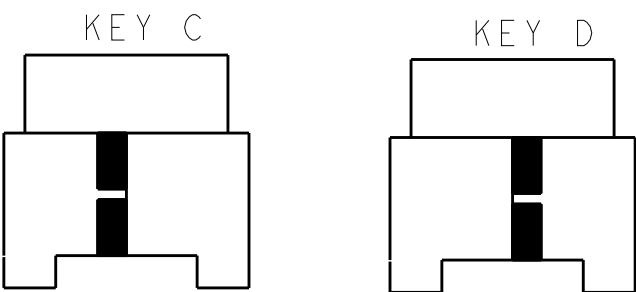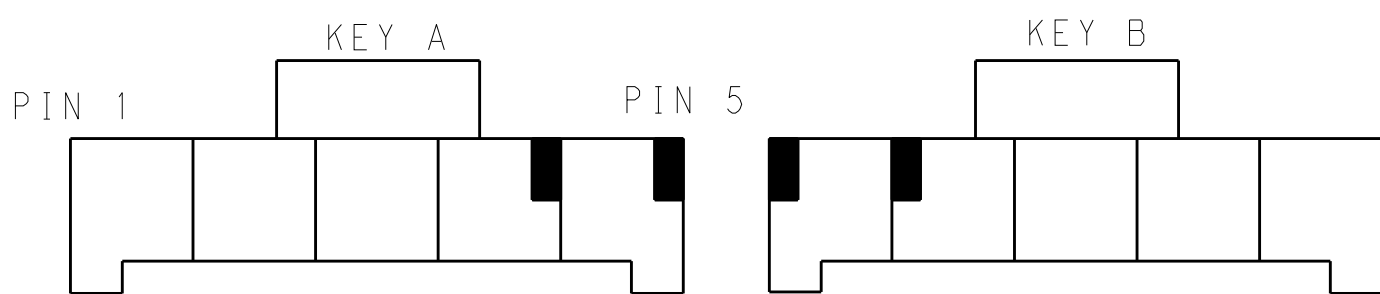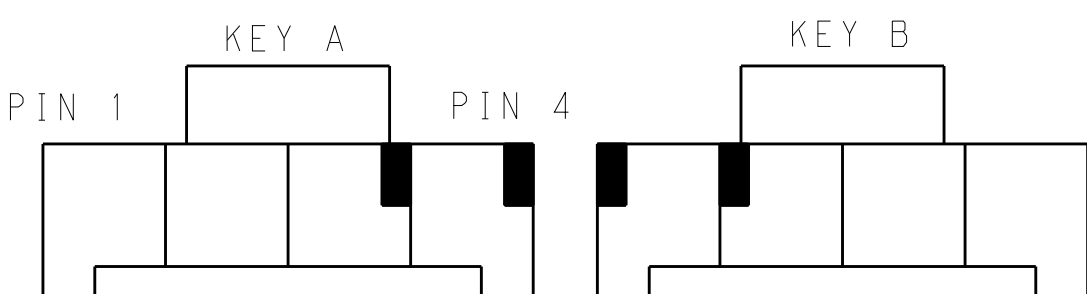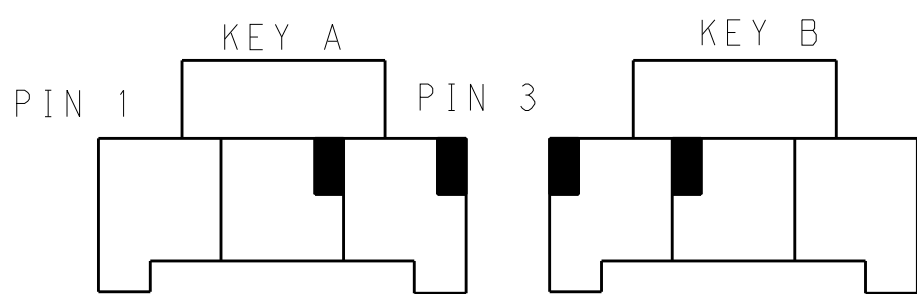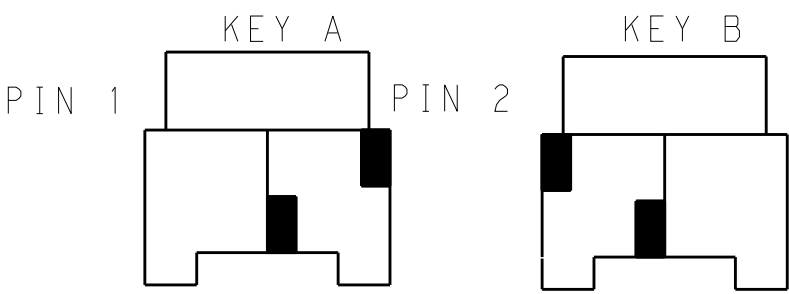

KEYING FOR 1*2 POS.

KEYING FOR 1*3 POS.

KEYING FOR 1*4 POS.

KEYING FOR 1*5 POS.

1*5	LEVEL A	DARK GREY	KEY A	5-2232358-7
		BROWN	KEY B	6-2232358-7
		GREEN	KEY C	7-2232358-7
		ORANGE	KEY D	8-2232358-7
1*4	LEVEL A	DARK GREY	KEY A	5-2232358-4
		BROWN	KEY B	6-2232358-4
		GREEN	KEY C	7-2232358-4
		ORANGE	KEY D	8-2232358-4
1*3	LEVEL B	BLACK	KEY A	1-2232358-3
		DARK GREY	KEY A	5-2232358-3
		BROWN	KEY B	6-2232358-3
		GREEN	KEY C	7-2232358-3
1*2	LEVEL A	ORANGE	KEY D	8-2232358-3
		DARK GREY	KEY A	5-2232358-2
		BROWN	KEY B	6-2232358-2
		GREEN	KEY C	7-2232358-2
POS.	MATERIAL	COLOR	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
TOMMY_WU
26MAR2013

CHK
HAPYE_WU
26MAR2013

APVD
YUHHONG_MAO
26MAR2013

DIMENSIONS:

mm

0 PLC ±.035
1 PLC ±0.25
2 PLC ±.035
3 PLC ±.035
4 PLC ±.035
ANGLES ±.035
FINISH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC
108-106118
APPLICATION SPEC
114-106118
WEIGHT
Customer Drawing

NAME
CAP HOUSING, FREE HANGING, SINGLE ROW
POWER TRIPLE LOCK

SIZE
A100779

CAGE CODE
C=2232358

DRAWING NO
2232358

RESTRICTED TO
-

SCALE
-

SHEET
2

OF
2

REV
B

TE Connectivity

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru