

## Sensor/actuator box - SACB-8/16-L-C SCO P - 1452851

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Sensor/actuator box, Connection method: M12-SPEEDCON-socket Plastic, Number of slots: 8, Number of positions: 5, Slot assignment: Double, Status indication: Yes, pnp; Master cable connection: Pluggable screw connection 180°, Shielding: No

### Product Features

- ✓ Safety in the field, thanks to molded housing and high degree of protection
- ✓ Flexible, distributed bundling of signals in one master cable
- ✓ Convenient: increased machine availability thanks to quick and easy diagnostics
- ✓ Save space: distributor box with double occupancy for two sensors in one slot
- ✓ Save time, thanks to installation with SPEEDCON fast locking system
- ✓ Flexible: distributor box with connector hood for on-site assembly



### Key commercial data

|                                      |           |
|--------------------------------------|-----------|
| Packing unit                         | 1 PCE     |
| Weight per Piece (excluding packing) | 240.0 GRM |
| Custom tariff number                 | 85444290  |
| Country of origin                    | Poland    |

### Technical data

#### General

|                                          |         |
|------------------------------------------|---------|
| Rated voltage                            | 24 V DC |
| Max. operating voltage $U_{max}$         | 30 V DC |
| Current carrying capacity per I/O signal | 2 A     |
| Current carrying capacity per slot       | 4 A     |
| Total rated current                      | 10 A    |
| Number of positions                      | 5       |
| Number of slots                          | 8       |
| Inflammability class according to UL 94  | V0      |

# Sensor/actuator box - SACB-8/16-L-C SCO P - 1452851

## Technical data

### General

|                                   |                     |
|-----------------------------------|---------------------|
| Sensor/actuator connection system | M12-SPEEDCON-socket |
|-----------------------------------|---------------------|

### Ambient conditions

|                                 |                  |
|---------------------------------|------------------|
| Degree of protection            | IP65             |
|                                 | IP67             |
| Ambient temperature (operation) | -25 °C ... 80 °C |

### Local diagnostics function

|                   |                               |
|-------------------|-------------------------------|
| Local diagnostics | Supply voltage Green LED      |
|                   | Status display I/O Yellow LED |

### Master cable data/connection data

|                                              |                            |
|----------------------------------------------|----------------------------|
| Connection method                            | Pluggable screw connection |
| Conductor cross section min. (signal)        | 0.14 mm <sup>2</sup>       |
| Conductor cross section max. (signal)        | 1.5 mm <sup>2</sup>        |
| Conductor cross section AWG min. (signal)    | 26                         |
| Conductor cross section AWG max. (signal)    | 16                         |
| Stripping length (signal)                    | 7 mm                       |
| Conductor cross section min. (energy)        | 0.14 mm <sup>2</sup>       |
| Conductor cross section max. (energy)        | 1.5 mm <sup>2</sup>        |
| Conductor cross section AWG min. (energy)    | 26                         |
| Conductor cross section AWG max. (energy)    | 16                         |
| External cable diameter min.                 | 7 mm                       |
| External cable diameter max.                 | 12 mm                      |
| Stripping length                             | 50 mm (Master cable)       |
| Tightening torque, cover screw               | 1 Nm                       |
| Tightening torque, union nut                 | 2.5 Nm                     |
| Tightening torque slot sensor/actuator cable | 0.4 Nm                     |

### Insulation material

|                                                          |             |
|----------------------------------------------------------|-------------|
| Housing material                                         | PBT         |
| Material of the moulding mass                            | PUR         |
| Contact material                                         | Cu alloy    |
| Contact surface material                                 | Gold-plated |
| Contact carrier material                                 | PA          |
| Material of contact, master cable side                   | CU alloy    |
| Material of contact surface, master cable side           | Sn          |
| Material of the contact carrier on the master cable side | PA          |
| Material of threaded sleeve                              | PBT         |

## Sensor/actuator box - SACB-8/16-L-C SCO P - 1452851

### Technical data

#### Insulation material

|                  |                      |
|------------------|----------------------|
| Material, O-ring | NBR                  |
| Sealing material | NBR (Connector hood) |

#### Pin assignment

|                                          |                       |
|------------------------------------------|-----------------------|
| Slot/position = Wire color or connection | 1 / 4 (A) = WH        |
|                                          | 1 / 2 (B) = GY/PK     |
|                                          | 2 / 4 (A) = GN        |
|                                          | 2 / 2 (B) = RD/BU     |
|                                          | 3 / 4 (A) = YE        |
|                                          | 3 / 2 (B) = WH/GN     |
|                                          | 4 / 4 (A) = GY        |
|                                          | 4 / 2 (B) = BN/GN     |
|                                          | 5 / 4 (A) = PK        |
|                                          | 5 / 2 (B) = WH/YE     |
|                                          | 6 / 4 (A) = RD        |
|                                          | 6 / 2 (B) = YE/BN     |
|                                          | 7 / 4 (A) = BK        |
|                                          | 7 / 2 (B) = WH/GY     |
|                                          | 8 / 4 (A) = VT        |
|                                          | 8 / 2 (B) = GY/BN     |
|                                          | 1-4 / 1 (+ 24 V) = BN |
|                                          | 1-8 / 3 (0 V) = BU    |
|                                          | 1-8 / 5 (PE) = GN/YE  |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27250313 |
| eCl@ss 4.1 | 27250313 |
| eCl@ss 5.0 | 27250313 |
| eCl@ss 5.1 | 27250314 |
| eCl@ss 6.0 | 27279219 |
| eCl@ss 7.0 | 27279219 |
| eCl@ss 8.0 | 27279219 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 4.0 | EC002585 |
| ETIM 5.0 | EC002585 |

## Sensor/actuator box - SACB-8/16-L-C SCO P - 1452851

### Classifications

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31261501 |
| UNSPSC 7.0901 | 31261501 |
| UNSPSC 11     | 31261501 |
| UNSPSC 12.01  | 31261501 |
| UNSPSC 13.2   | 31261501 |

### Approvals

#### Approvals

#### Approvals

UL Recognized / cUL Recognized / GOST / cULus Recognized

#### Ex Approvals

#### Approvals submitted

#### Approval details

|                                                                                                   |      |
|---------------------------------------------------------------------------------------------------|------|
| UL Recognized  |      |
| Nominal voltage UN                                                                                | 24 V |

|                                                                                                    |      |
|----------------------------------------------------------------------------------------------------|------|
| cUL Recognized  |      |
| Nominal voltage UN                                                                                 | 24 V |

|                                                                                          |  |
|------------------------------------------------------------------------------------------|--|
| GOST  |  |
|------------------------------------------------------------------------------------------|--|

## Sensor/actuator box - SACB-8/16-L-C SCO P - 1452851

### Approvals

cULus Recognized  US

### Accessories

#### Accessories

##### Cable by the meter

Master cable ring - SACB-16X0,5/ 3X1,0-50,0 PUR - 1503373



Master cable for sensor/actuator boxes, with PE conductor, unshielded, material PUR/PP, 19-pos., 16 x 0.50 mm<sup>2</sup> and 3 x 1.00 mm<sup>2</sup>, length: 50 m

Master cable ring - SACB-16X0,5/ 3X1,0-200,0 PUR - 1559893



Master cable for sensor/actuator boxes, with PE conductor, unshielded, material PUR/PP, 19-pos., 16 x 0.50 mm<sup>2</sup> and 3 x 1.00 mm<sup>2</sup>, length: 200 m on drum

Master cable ring - SACB-16X0,5/ 3X1,0-50,0 VPUR - 1430938



Master cable for sensor/actuator boxes, with PE conductor, unshielded, material PUR/PP, 19-pos., 16 x 0.50 mm<sup>2</sup> and 3 x 1.00 mm<sup>2</sup>, length: 50 m

### Device marking

Contact marker – zack marker strip - SS-ZB 17,5 WH - 0804963



Contact marker – zack marker strip, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Snap into flat marker groove, Lettering field: 17.5 x 8 mm

## Sensor/actuator box - SACB-8/16-L-C SCO P - 1452851

### Accessories

Contactor marker – zack marker strip - SS-ZB 17,5 YE - 0804976



Contactor marker – zack marker strip, Strip, yellow, Unlabeled, Can be labeled with: Plotter, Mounting type: Snap into flat marker groove, Lettering field: 17.5 x 8 mm

---

### Labeled device marker

Contactor marker – zack marker strip - SS-ZB 17,5 WH CUS - 0824468



Contactor marker – zack marker strip, Can be ordered: Strip, white, Labeled according to customer specifications, Mounting type: Snap into flat marker groove, Lettering field: 17.5 x 8 mm

Contactor marker – zack marker strip - SS-ZB 17,5 YE CUS - 0824469



Contactor marker – zack marker strip, Can be ordered: Strip, yellow, Labeled according to customer specifications, Mounting type: Snap into flat marker groove, Lettering field: 17.5 x 8 mm

---

### Protective cap

Screw plug - PROT-MS SCO - 1553129



M12 screw plug with SPEEDCON quick locking for unoccupied M12 sockets of the sensor/actuator cables, boxes and flush-type connectors

---

### Screwdriver tools

## Sensor/actuator box - SACB-8/16-L-C SCO P - 1452851

### Accessories

Tool - SACC BIT M12-D20 - 1208445



Nut for assembling SACC M12 connectors for free assembly, excluding M12 connectors with QUICKON fast connection technology, for 4 mm hexagonal drive

---

Philips screwdriver - SZK PZ2 VDE - 1206463



Screwdriver, PZ crosshead, VDE insulated, size: PZ 2 x 100 mm, 2-component grip, with non-slip grip

---

Tool - SAC BIT HOOD-W 24 - 1212486



Nut for assembling pressure nuts with 24 mm wrench size, for 4 mm hexagonal drive

---

Adapter insert - TSD-M SAC-BIT ADAPTER - 1212600



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

---

### Torque tool

Torque screwdriver - TSD 04 SAC - 1208429



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

# Sensor/actuator box - SACB-8/16-L-C SCO P - 1452851

## Accessories

Torque screwdriver - TSD-M 1,2NM - 1212224



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

Torque screwdriver - TSD 25 SAC - 1212315



Torque screwdriver, with preset torque of 2.5 Nm and 4 mm hexagonal drive for the pressure nut of the connector hood


Torque screwdriver - TSD-M 3NM - 1212225



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 1.2 - 3 Nm


## Drawings

Schematic diagram



M12 slot, socket, 5-pos.


Circuit diagram

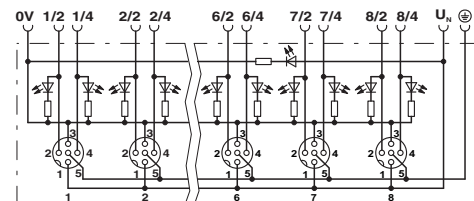



## Sensor/actuator box - SACB-8/16-L-C SCO P - 1452851

Dimensioned drawing

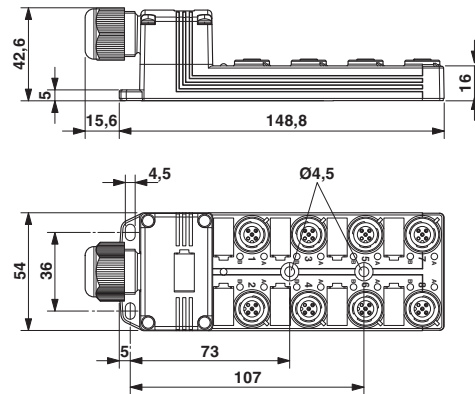

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)