


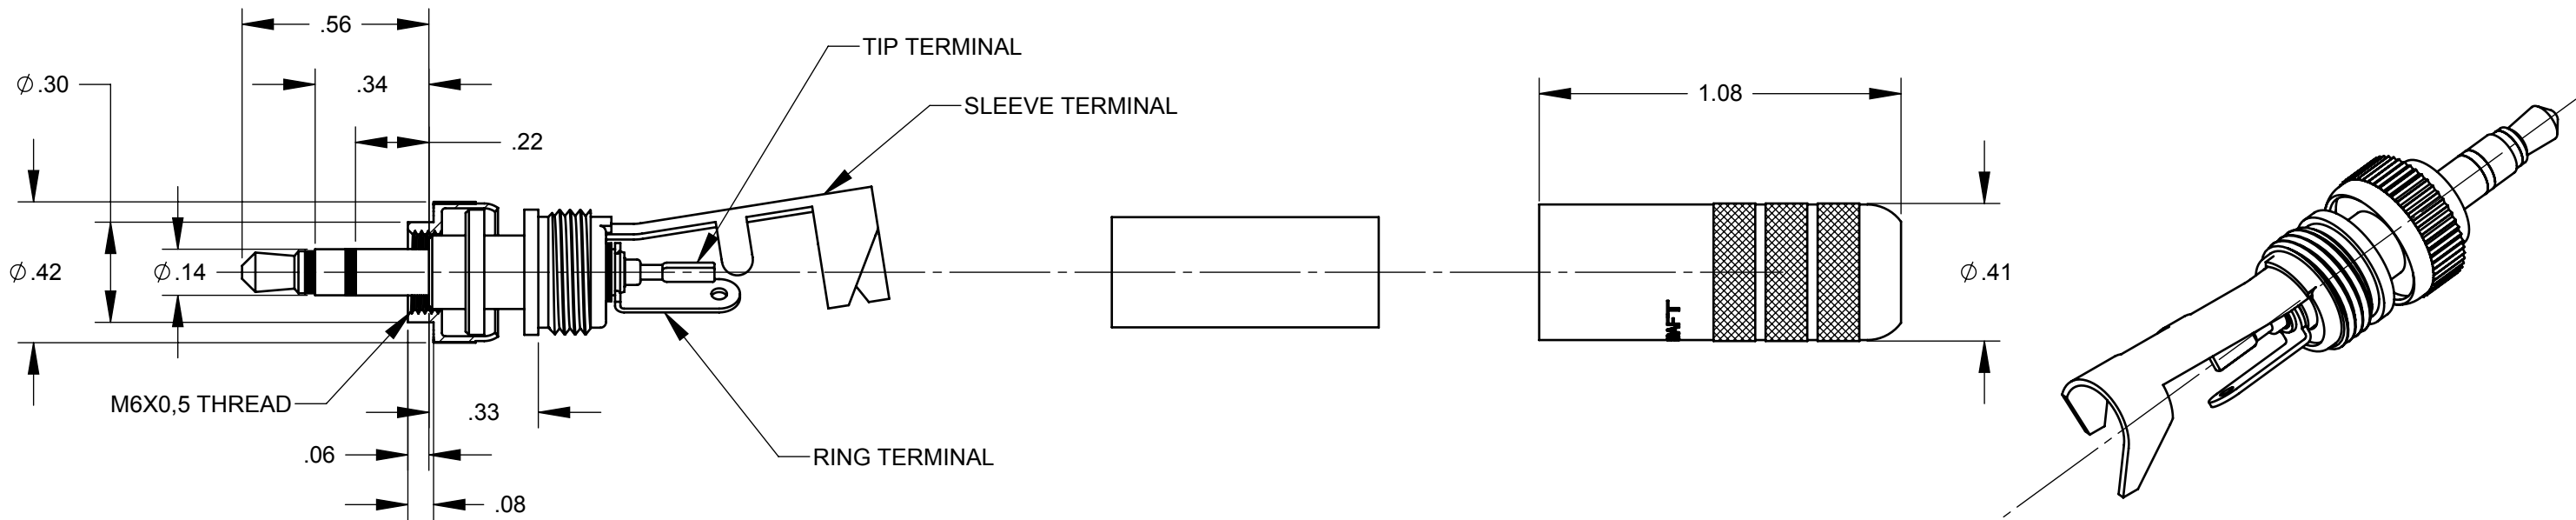

SPECIFICATION:

1. CONTACT RESISTANCE: 20 MILIOHMS MAX
2. DIELECTRIC WITHSTANDING VOLTAGE: 250 VAC MIN
3. INSULATION RESISTANCE @ 500 VDC: 2,000 MEGAOHMS MIN
4. MAX WORKING VOLTAGE: 250 VAC; 140VDC
5. CURRENT CARRY @ WORKING VOLTAGE: 4 AMPS
6. INSERT/WITHDRAWAL FORCE: TYPICAL 2.5/2 LBS
7. TEMPERATURE RANGE: -20°C TO 85°C (OPERATING)
8. THERMAL SHOCK: MIL-STD-202, METHOD 107G
9. VIBRATION: MIL-STD-202, METHOD 201
10. LIFE: 5,000 CYCLES
11. CABLE SIZE: .250 DIA MAX
12. THESE PRODUCTS ARE RoHS COMPLIANT.

MATERIAL:

1. TIP ROD: COPPER ALLOY, TIN OR GOLD PLATED
2. RING: COPPER ALLOY, TIN OR GOLD PLATED
3. SLEEVE: COPPER ALLOY, TIN OR GOLD PLATED
4. HANDLE: COPPER ALLOY, NICKEL PLATED OR BLACK EPOXY PAINT
5. CABLE CLAMP: C.R.S., TIN PLATED
6. TUBULAR INSULATOR: CLEAR PLASTIC

"A" DIA CABLE HOLE
SEE PART NUMBER TABLE

PART NUMBER	HANDLE	PLUG	"A"
35HDLNN	NICKEL	TIN	.29 DIA
35HDLBN	BLACK	TIN	.29 DIA
35HDLNAU	NICKEL	GOLD	.29 DIA
35HDLBAU	BLACK	GOLD	.29 DIA
35HDLNNS	NICKEL	TIN	.18 DIA
35HDLBNS	BLACK	TIN	.18 DIA
35HDLNAUS	NICKEL	GOLD	.18 DIA
35HDLBAUS	BLACK	GOLD	.18 DIA

CUSTOMER DRAWING

						THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.										
					UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS IN INCHES - TWO PLACE DECIMALS ±0.02 - THREE PLACE DECIMALS ±0.005	SIZE	WIDTH		MULT		LBS/M		TEMPER			
0E	UPDATE	01/05/10	ZS	SRC		FINISH					MATERIAL					
0D	UPDATE	10/10/08	ZS	SRC		SPEC No.					SPEC No.					
0C	STEP LOCK NUT	10/10/08	ZS	SRC		FIRST USED ON			SCALE			Switchcraft®				
0B	UPDATE	04/29/08	ZS	SRC		DATE DRAWN			BY	CHKD	APVD					
0A	RELEASE	12/20/07	ZS	SRC		12/20/07			ZS	12/20/07	12/20/07					
										SRC	SRC					
REV	ECO NUMBER	DATE	BY	APVD	NAME					PART No.			REV			
REVISIONS					DO NOT SCALE DRAWING	3,5 MM STEREO PLUG, RoHS					35HD SERIES			0E		

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru