


AX61400

4U 14-slot Rackmount Chassis

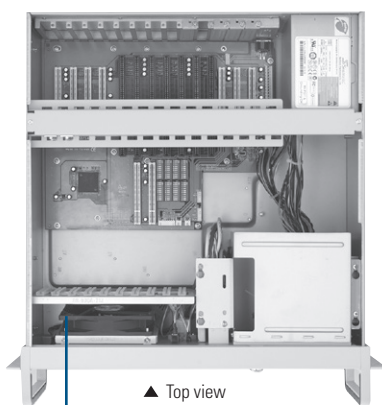

▲ Top view

Default 1 x 12 cm fan

Features

- Three 5.25" and max. two 3.5" HDD drive bays
- One 12cm ball-bearing fan
- Supports 14-slot backplane or ATX MB
- Single PS/2 size power supply supported



Specifications

Standard Color	Beige
Construction	Heavy-duty steel
Drive Capacity	Exposed 3 x 5.25" HDD drive bay and 1 x 3.5" HDD drive bay; internal 1 x 3.5" HDD drive bay
Cooling	1 x 12 cm ball-bearing fan (78 CFM/each) with a removable filter
Front Panel Indicators	1 x power on/off; 1 x HDD
Front Panel Controls	1 x power on/off; 1 x system reset
Front Panel Connectors	2 x USB; 1 x PS2 mini-DIN keyboard
Pre-punched Panel	1 x 25-pin; 1 x DIN 5-pin keyboard
Hold-down Clamp	height adjustable clamps with rubber cushions
System Board	SBCs or 12" x 9.6" ATX MB or IMB series

Expansion Interface	14-slot backplane
Speaker	1 x 0.4W speaker
Operating Temperature	0°C ~ +40°C (+32°F ~ +104°F)
RangeDimensions	482.6 mm (19") (W) x 450 mm (17.7") (D) x 177 mm (7") (H)
Weight (net/gross)	15 kg (33.07 lb)/16.3 kg (35.94 lb)

Power Supply Specifications

Items	Watt	Input	Specifications Output	MTBF
PS302-XP2	ATX 300W (PFC)	AC 100-340V (Auto)	+5V @ 16A	100,000 hours
			+12V1 @ 17A	
			+12V2 @ 17A	
			-12V @ 0.3A	
			+5VSB @ 2.5A	
			+3.3V @ 19A	
PS400-XP2	ATX 400W (PFC)	AC 90-264V (Auto)	+5V @ 20A	100,000 hours
			+12V1 @ 16A	
			+12V2 @ 16A	
			-12V @ 0.5A	
			+3.3V @ 20A	
			+5VSB @ 2.5A	
			+5V @ 24A	
			+12V @ 34A	
PS500-XP2	ATX 500W (PFC)	AC 90-264V (Auto)	+12V1 @ 17A	100,000 hours
			+12V2 @ 17A	
			-12V @ 0.8A	
			+3.3V @ 24A	
			+5VSB @ 2.5A	

Ordering Information

AX61400T(W)B/X400	14-slot version, with one 12 cm fan, ATX 400W power supply
AX61400T(W)B/X300	14-slot version, with one 12 cm fan, ATX 300W power supply
AX61400T(W)M/X400	MB version, with one 12 cm fan, ATX 400W power supply
AX61400T(W)M/X300	MB version, with one 12 cm fan, ATX 300W power supply

*Specifications and certifications are based on options and may vary.

** T-Black color; W-Beige color

Backplane Options


PICMG 1.0

Models	Slots per Segment (ISA/PCI/PCIe/CPU)	Segment
ATX6022/13L	8/4/0/1	Single
ATX6022/14G	1/12/0/1	Single
ATX6022/14GP7	6/7/0/1	Single
ATX6022/14	9/4/0/1	Single

PICMG 1.3

Models	Slots per Segment (ISA/PCI/PCIe/CPU)	Segment
FAB100	4/4/5/1	Single
FAB101	0/13/0/1	Single
FAB112	0/10/2/1	Single
FAB113	0/4/8/1	Single
FAB114	0/8/4/1	Single
FAB118	0/7/6/1	Single
FAB119	0/10/2/1	Single

Dimensions

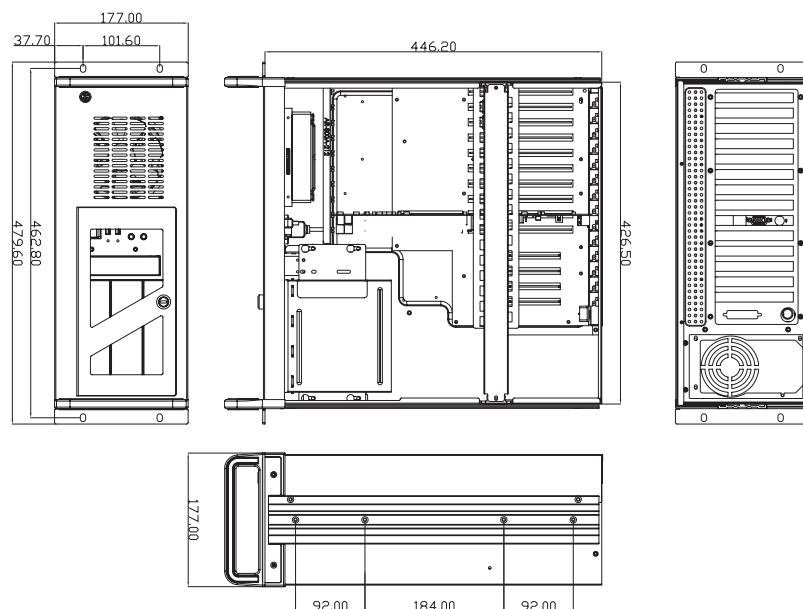

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru