

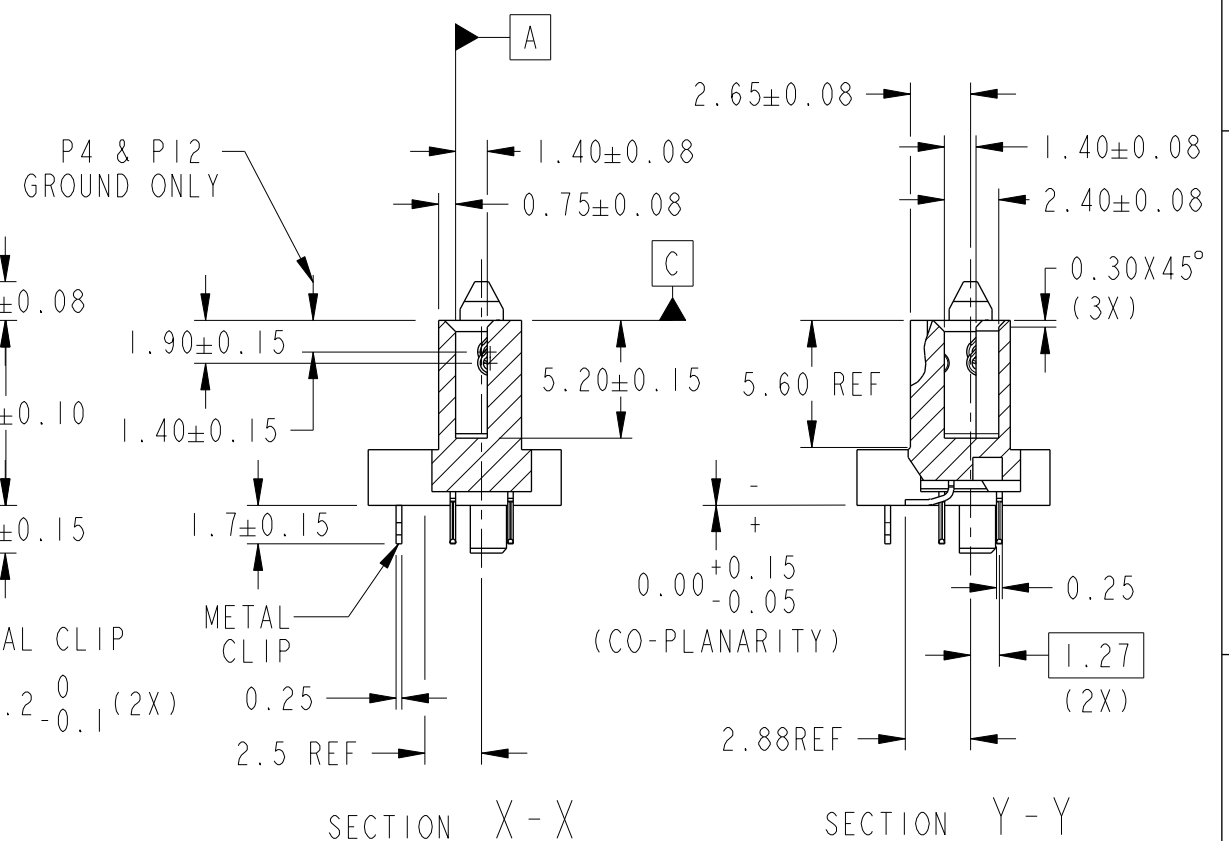
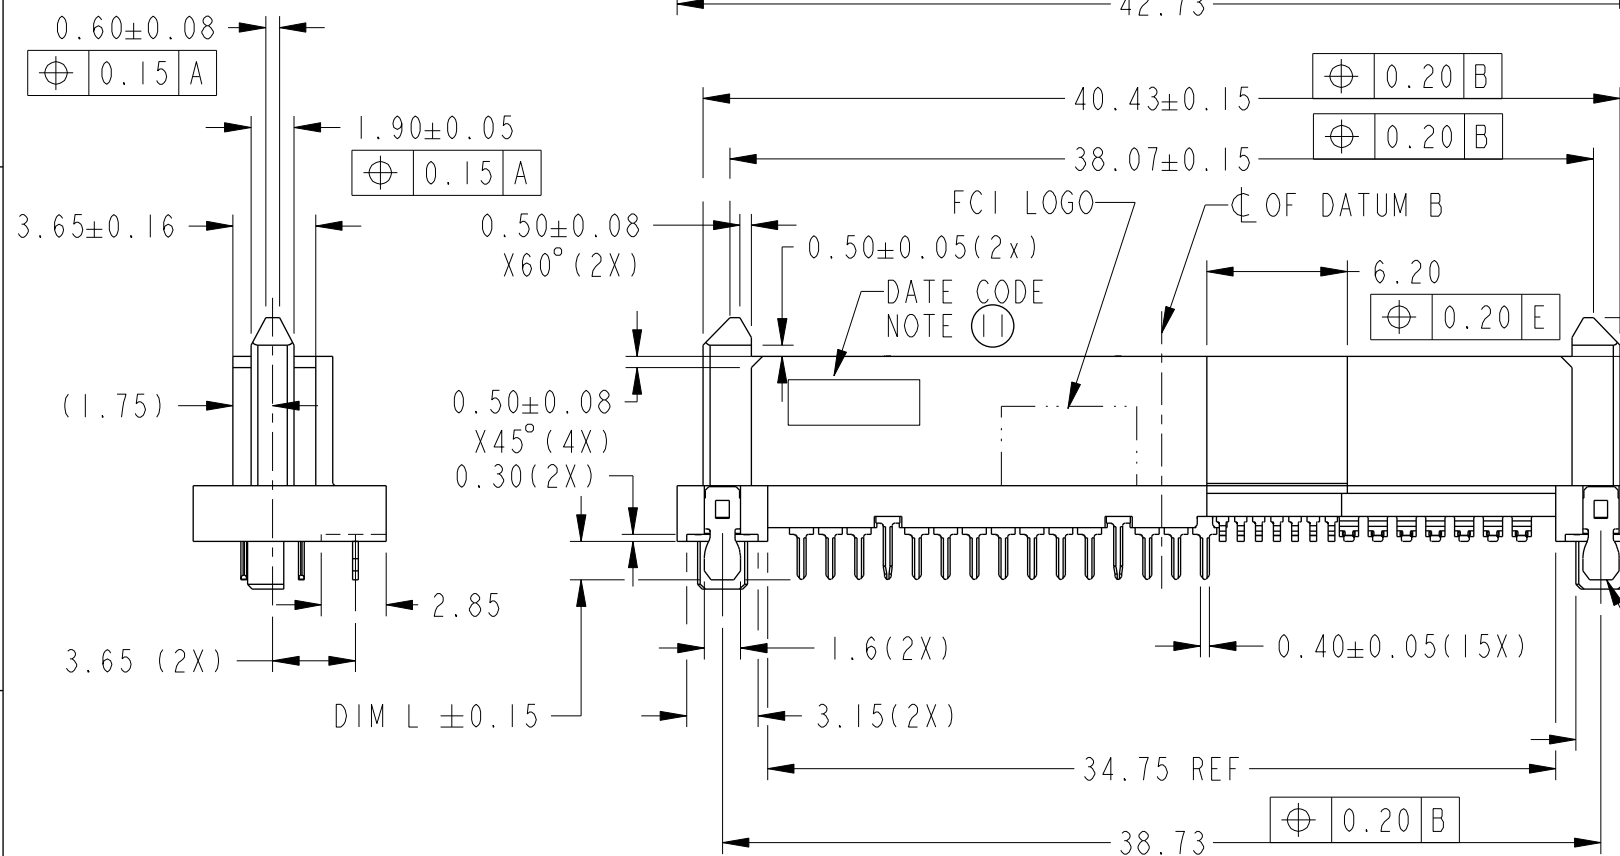
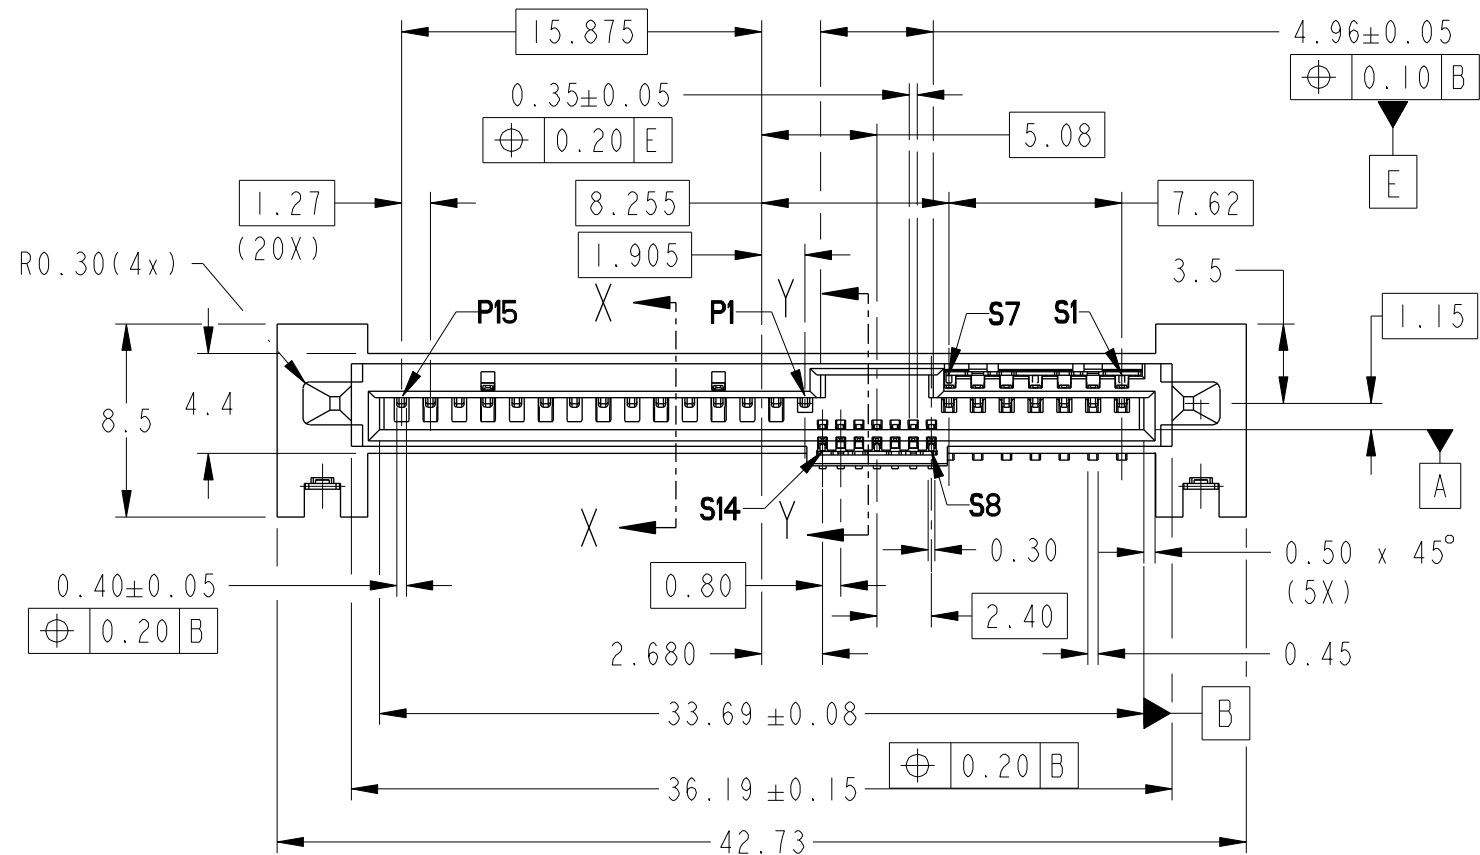



PRODUCT NO
SEE TABLE


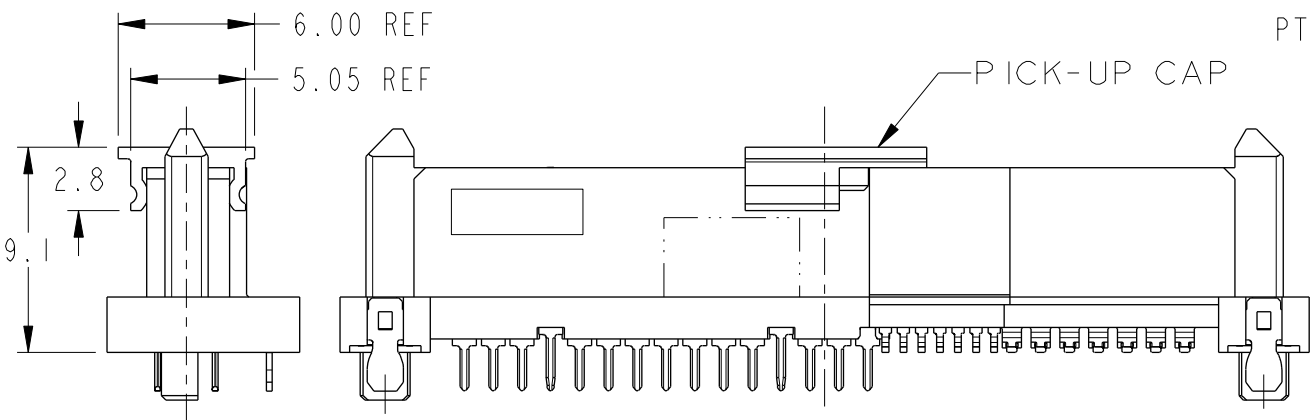


spec ref -				dr M Srinivasan		2013/06/19		projection  MM 		size A3		scale 3:1			
tolerance std ISO 1101				eng Noorhazelinda		2017/04/10				ecn no ELX-M-26592-1					
TOLERANCES UNLESS OTHERWISE SPECIFIED				chr -		-				rel level Released					
				appr Koon-Poh Tay		2017/05/17		product family SAS							
surface ISO 1302 		linear		0.X ± -		Amphenol FCI title 12G SAS RECEPTACLE WIDE BASE HYBRID TYPE ASSY		dwg no 10120863		rev E					
		0.XX ±.20													
		0.XXX ± -													
angular		0° ±2°				cat. no. -		Product - Customer Drw				sheet 1 of 4			

PRODUCT NO	DIM L	PICK-UP CAP	RECOMMENDED P.C. BOARD THICKNESS	TYPE OF CLIP	PACKAGING
	(SOLDER TAIL)				
10120863-001LF	1.70	NO	1.57mm (0.062") / 2.36mm (0.093") / 3.43mm (0.135")	METAL BLADE 	TRAY
10120863-001CLF		YES			TAPE & REEL
10120863-001C-TRLF		YES			
10120863-002LF	2.10	NO	2.36mm (0.093") / 3.43mm (0.135")	METAL BLADE 	TRAY
10120863-002CLF		YES			TAPE & REEL
10120863-002C-TRLF		YES			

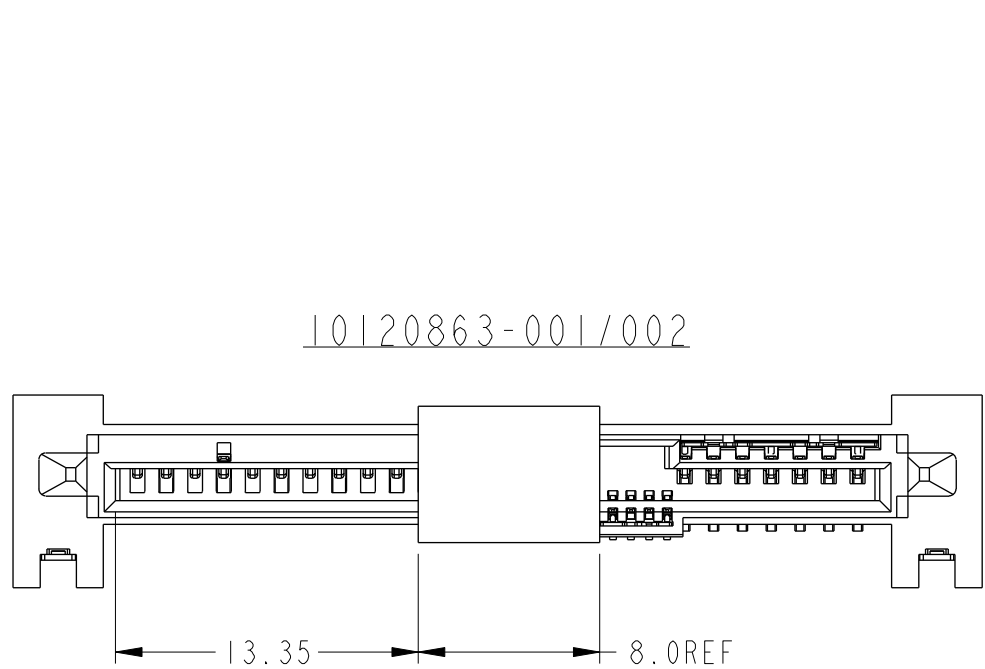


PART WITH PICK-UP CAP, SEE NOTE ④

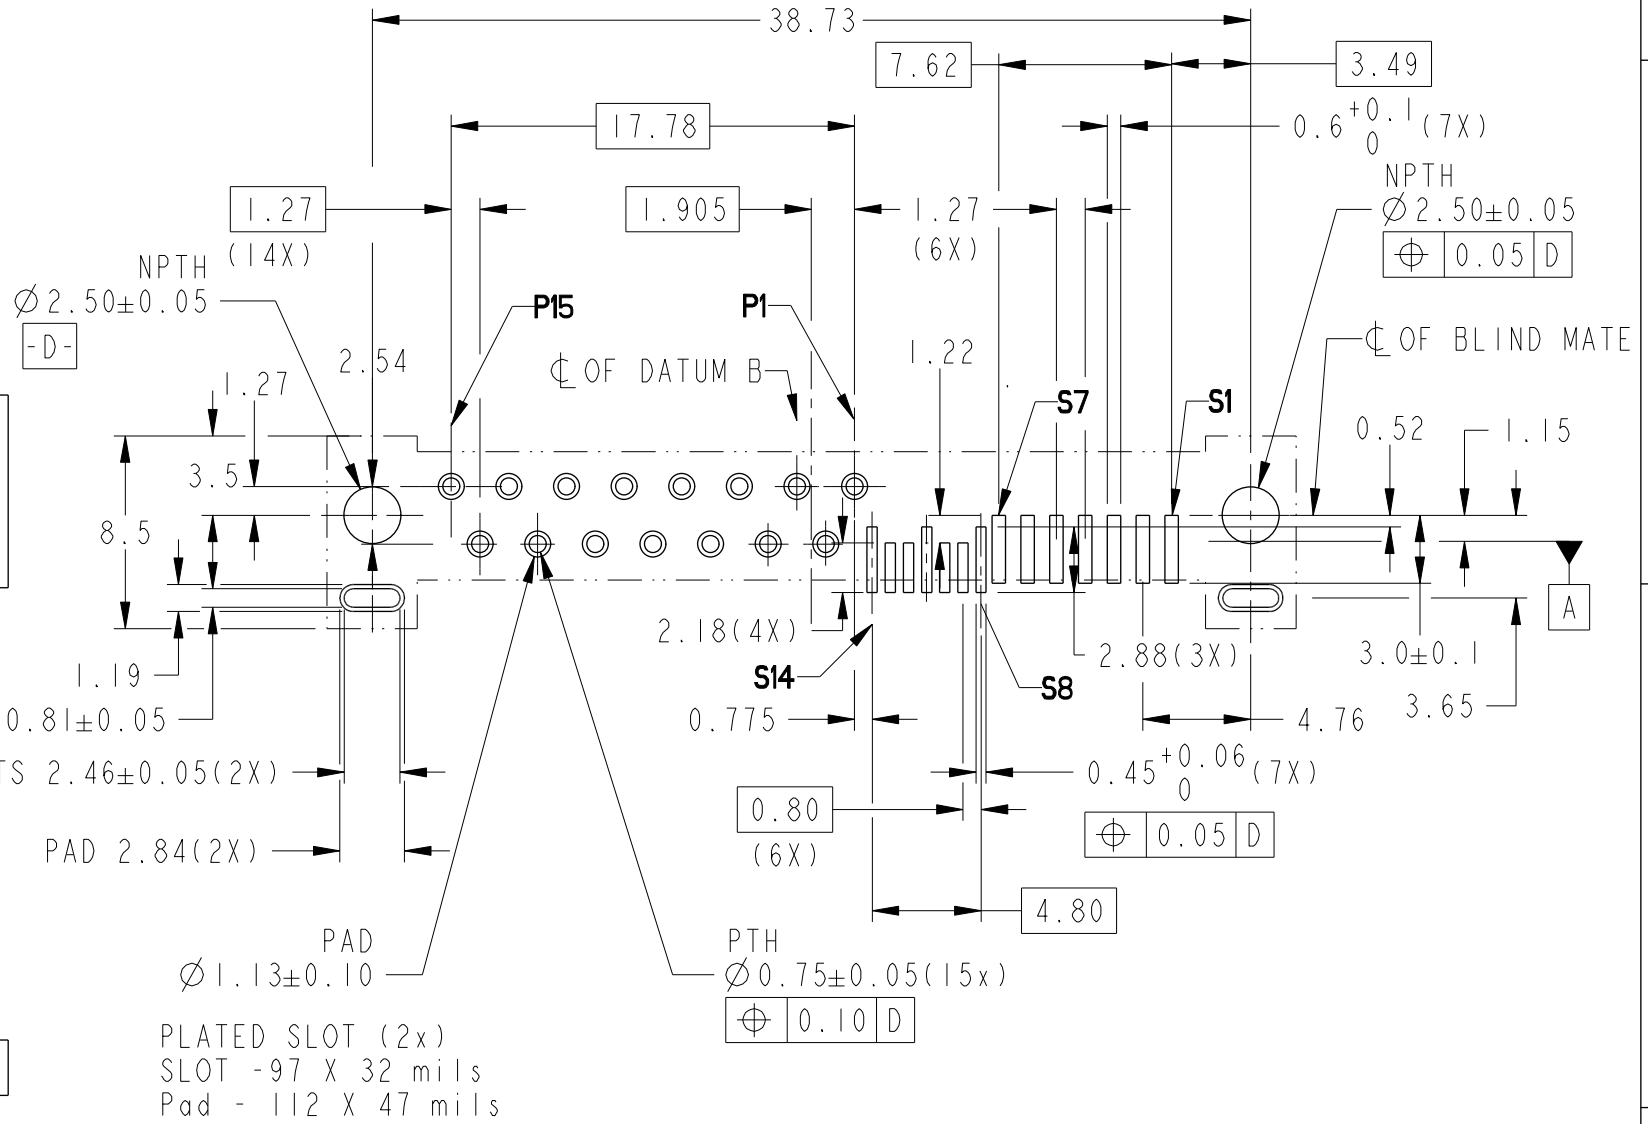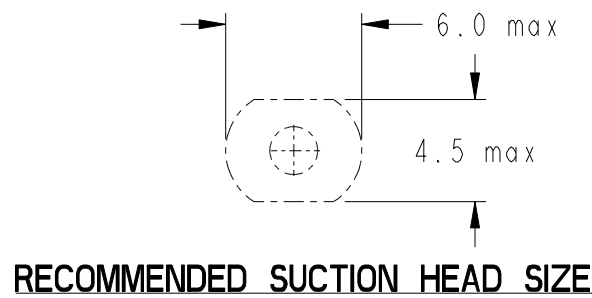


RECOMMENDED PCB LAYOUT

spec ref -				dr M Srinivasan		2013/06/19		projection		MM		size A3		scale 3:1	
tolerance std				eng Noorhazelinda		2017/04/10						ecn no ELX-M-26592-1			
ISO 1101				chr -		-									
TOLERANCES UNLESS OTHERWISE SPECIFIED				appr Koon-Poh Tay		2017/05/17						product family SAS			
surface		- 	linear	0.X	± -	Amphenol FCI		title 12G SAS RECEPTACLE WIDE BASE HYBRID TYPE ASSY				dwg no 10120863		rev E	
				0.XX	± .20										
				0.XXX	± -										
ISO 1302			angular	0°	±2°			cat. no. -		Product - Customer Drw				sheet 2 of 4	




PRODUCT NO	DIM L	PICK-UP CAP	RECOMMENDED P.C. BOARD THICKNESS	TYPE OF CLIP	PACKAGING
	(SOLDER TAIL)				
10120863-003LF	2.10	NO	2.36mm (0.093") / 3.43mm (0.135")	METAL BLADE A 	TRAY
10120863-003CLF		YES			TAPE & REEL
10120863-003C-TRLF		YES			
10120863-004LF	1.70	NO	1.57mm (0.062") / 2.36mm (0.093") / 3.43mm (0.135")	METAL BLADE B 	TRAY
10120863-004CLF		YES			TAPE & REEL
10120863-004C-TRLF		YES			




10120863-003
(WITH CLOSURE ON HOLD DOWN AREA)

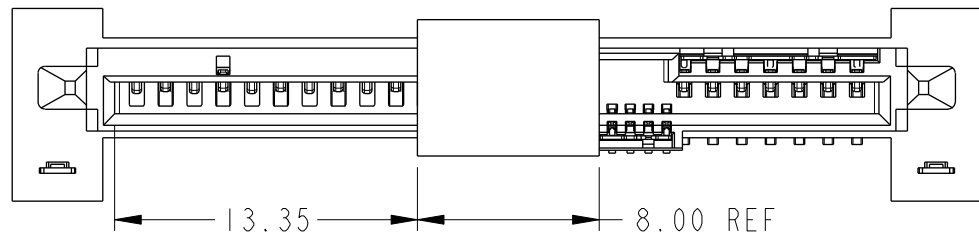

10120863-004
(WITH CLOSURE ON HOLD DOWN AREA) 

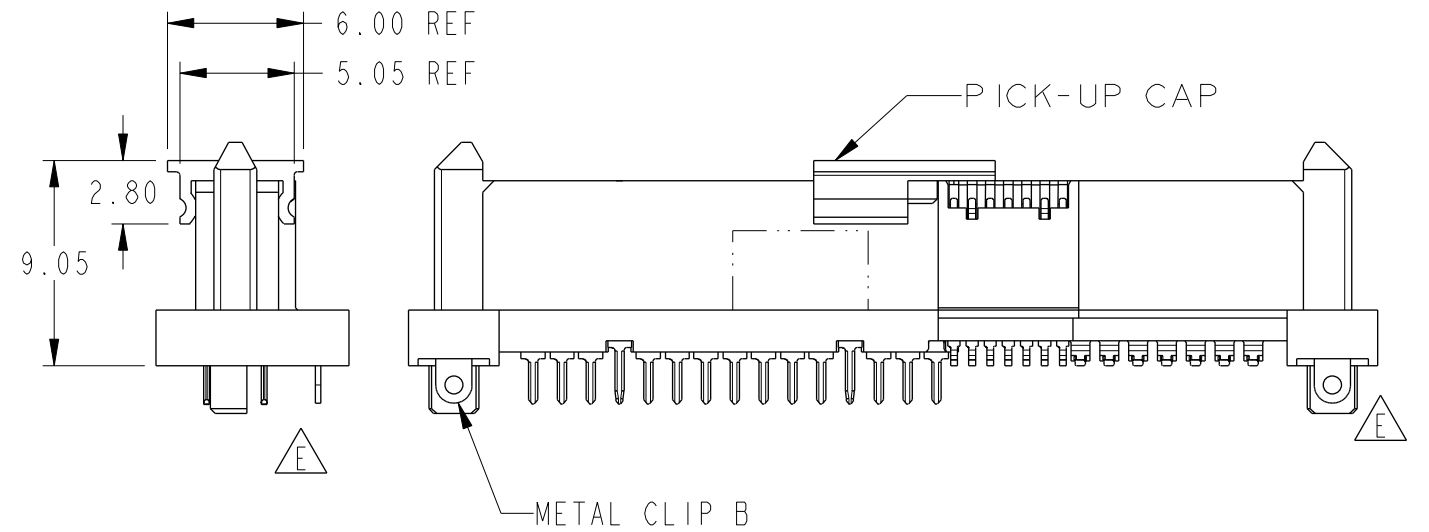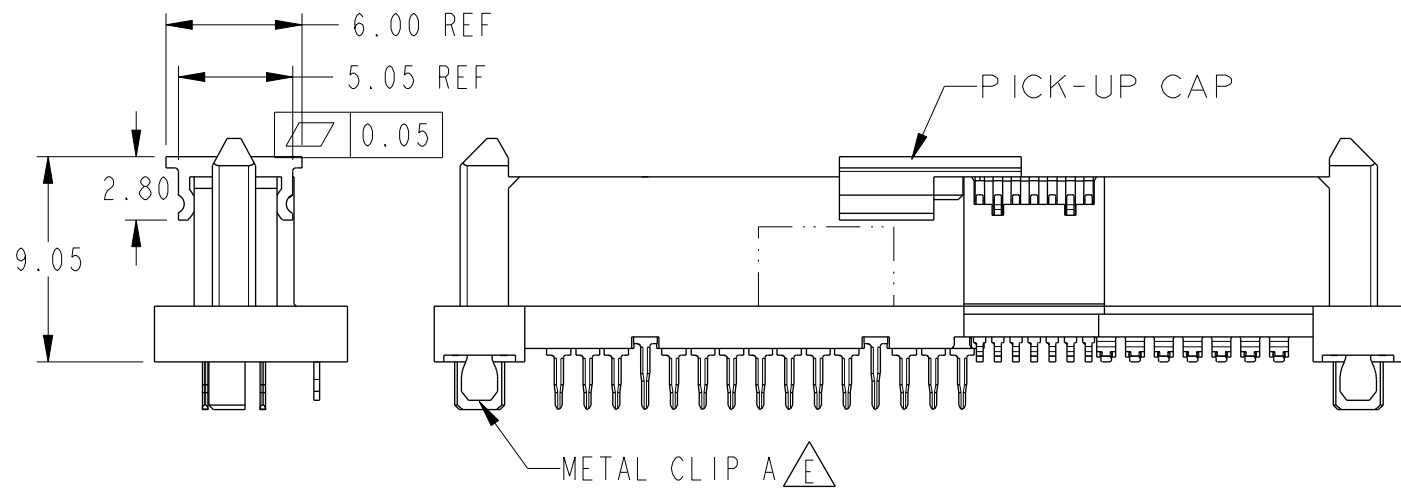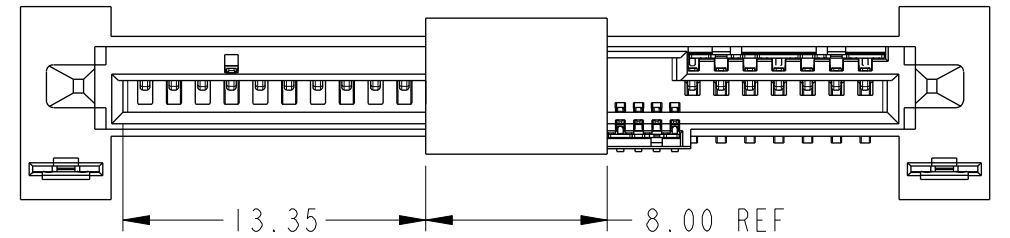

PART WITH PICK-UP CAP, SEE NOTE ④

spec ref	-	dr	M Srinivasan	2013/06/19	projection		MM	size	A3	scale	1:1
tolerance std	ISO 1101	eng	Noorhazlinda	2017/04/10	chr	-	-	ecn no	ELX-M-26592-1	rel level	Released
surface	ISO 1302	appr	Koon-Poh Tay	2017/05/17	product family	SAS		rel level	Released		
linear	0.X ± -	Amphenol FCI	12G SAS RECEPTACLE	dwg no	10120863	rev	E				
angular	0° ± 2°		WIDE BASE HYBRID TYPE ASSY								
		cat. no.	-	Product - Customer Drw	sheet 3 of 4						

PRODUCT NO
SEE TABLE

NOTES:

1 MATERIAL:

1)HOUSING: HIGH TEMP TERMOPLASTIC, UL 94V-0
COLOR: BLACK

2)TERMINAL: COPPER ALLOY

3)HOLD DOWN: COPPER ALLOY

2 FINISH

1)TERMINAL: 30μ" Au PLATING (CONTACT POINT) OVER
50μ" NICKEL

2)SOLDER TAIL: 75μ" min Sn OVER 50μ" NICKEL

3)HOLD DOWN: 75μ" min Sn OVER 50μ" NICKEL

3 PER SFF REV 1.3 EXCEPT 0.8mm PITCH BUMP AREA

4 PART WITH PICK-UP CAP, P/N XXXXXXXX-XXXC LF

5 THE STD PACKAGING IS IN TRAY

6 FOR TAPE & REEL PACKAGING, SUFFIX "-TR" ADDED AFTER
PRODUCT NUMBER (E.G. XXXXXXXX-XXXC-TRLF)

7 THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK
TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA-RED
OR VAPOUR PHASE REFLOW OVEN.


8 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND
OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004

9 PART NUMBERS ENDING IN "LF" MEANS FOR NOTE 8 LEAD FREE
IDENTIFICATION

10 A  SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW OR NOTE
WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION


11 DATE CODE LOCATION. DATE CODE NO. YYWW (E.G. 14225)

12 CORING AT NON FUNCTIONAL AREAS ARE SUBJECT TO CHANGE
WITHOUT NOTICES.

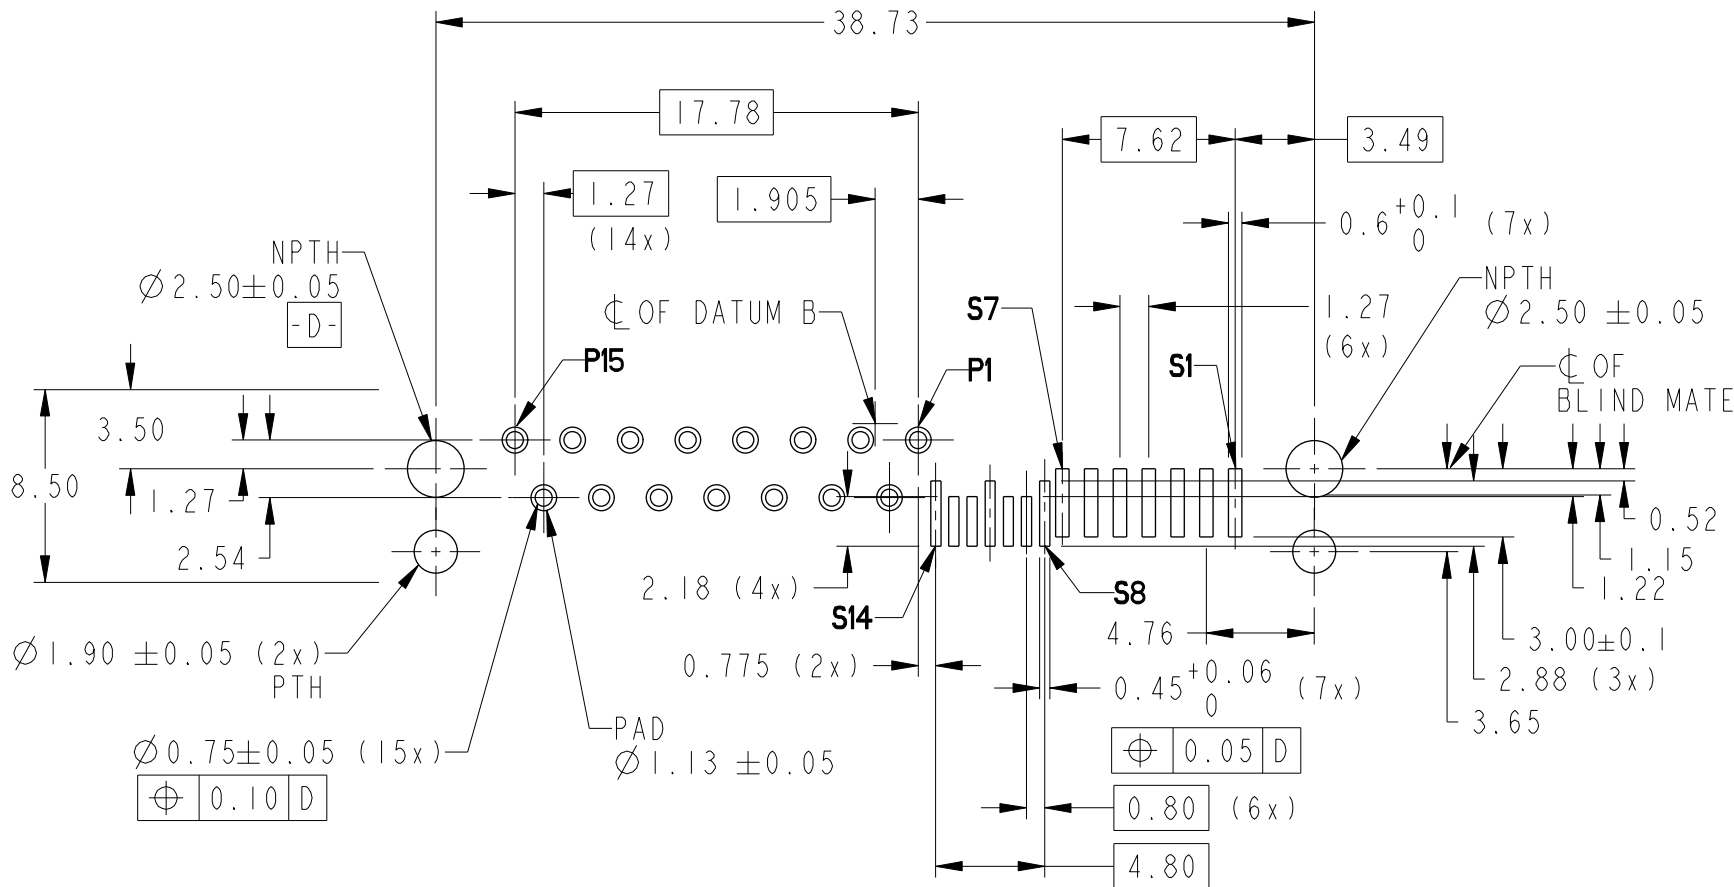

PLATED HOLES (15X)
FHS - 29.5 mils
Pad - 44.5 mils

RECOMMENDED PCB LAYOUT
(WITH ROUND SHAPE PTH FOR CLIP)

spec ref -				dr M Srinivasan		2013/06/19		projection		MM		size A3		scale 1:1			
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng Noorhazelinda		2017/04/10						ecn no ELX-M-26592-1			
ISO 1101						chr -		-									
ISO 1302						appr Koon-Poh Tay		2017/05/17		product family -						rel level Released	
surface - 		linear		0.X ± -		0.XX ±.20		0.XXX ± -		Amphenol FCI		title 12G SAS RECEPTACLE WIDE BASE HYBRID TYPE ASSY		dwg no 10120863		rev E	
ISO 1302		angular		0° ±2°				cat. no. -		Product - Customer Drw				sheet 4 of 4			

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru