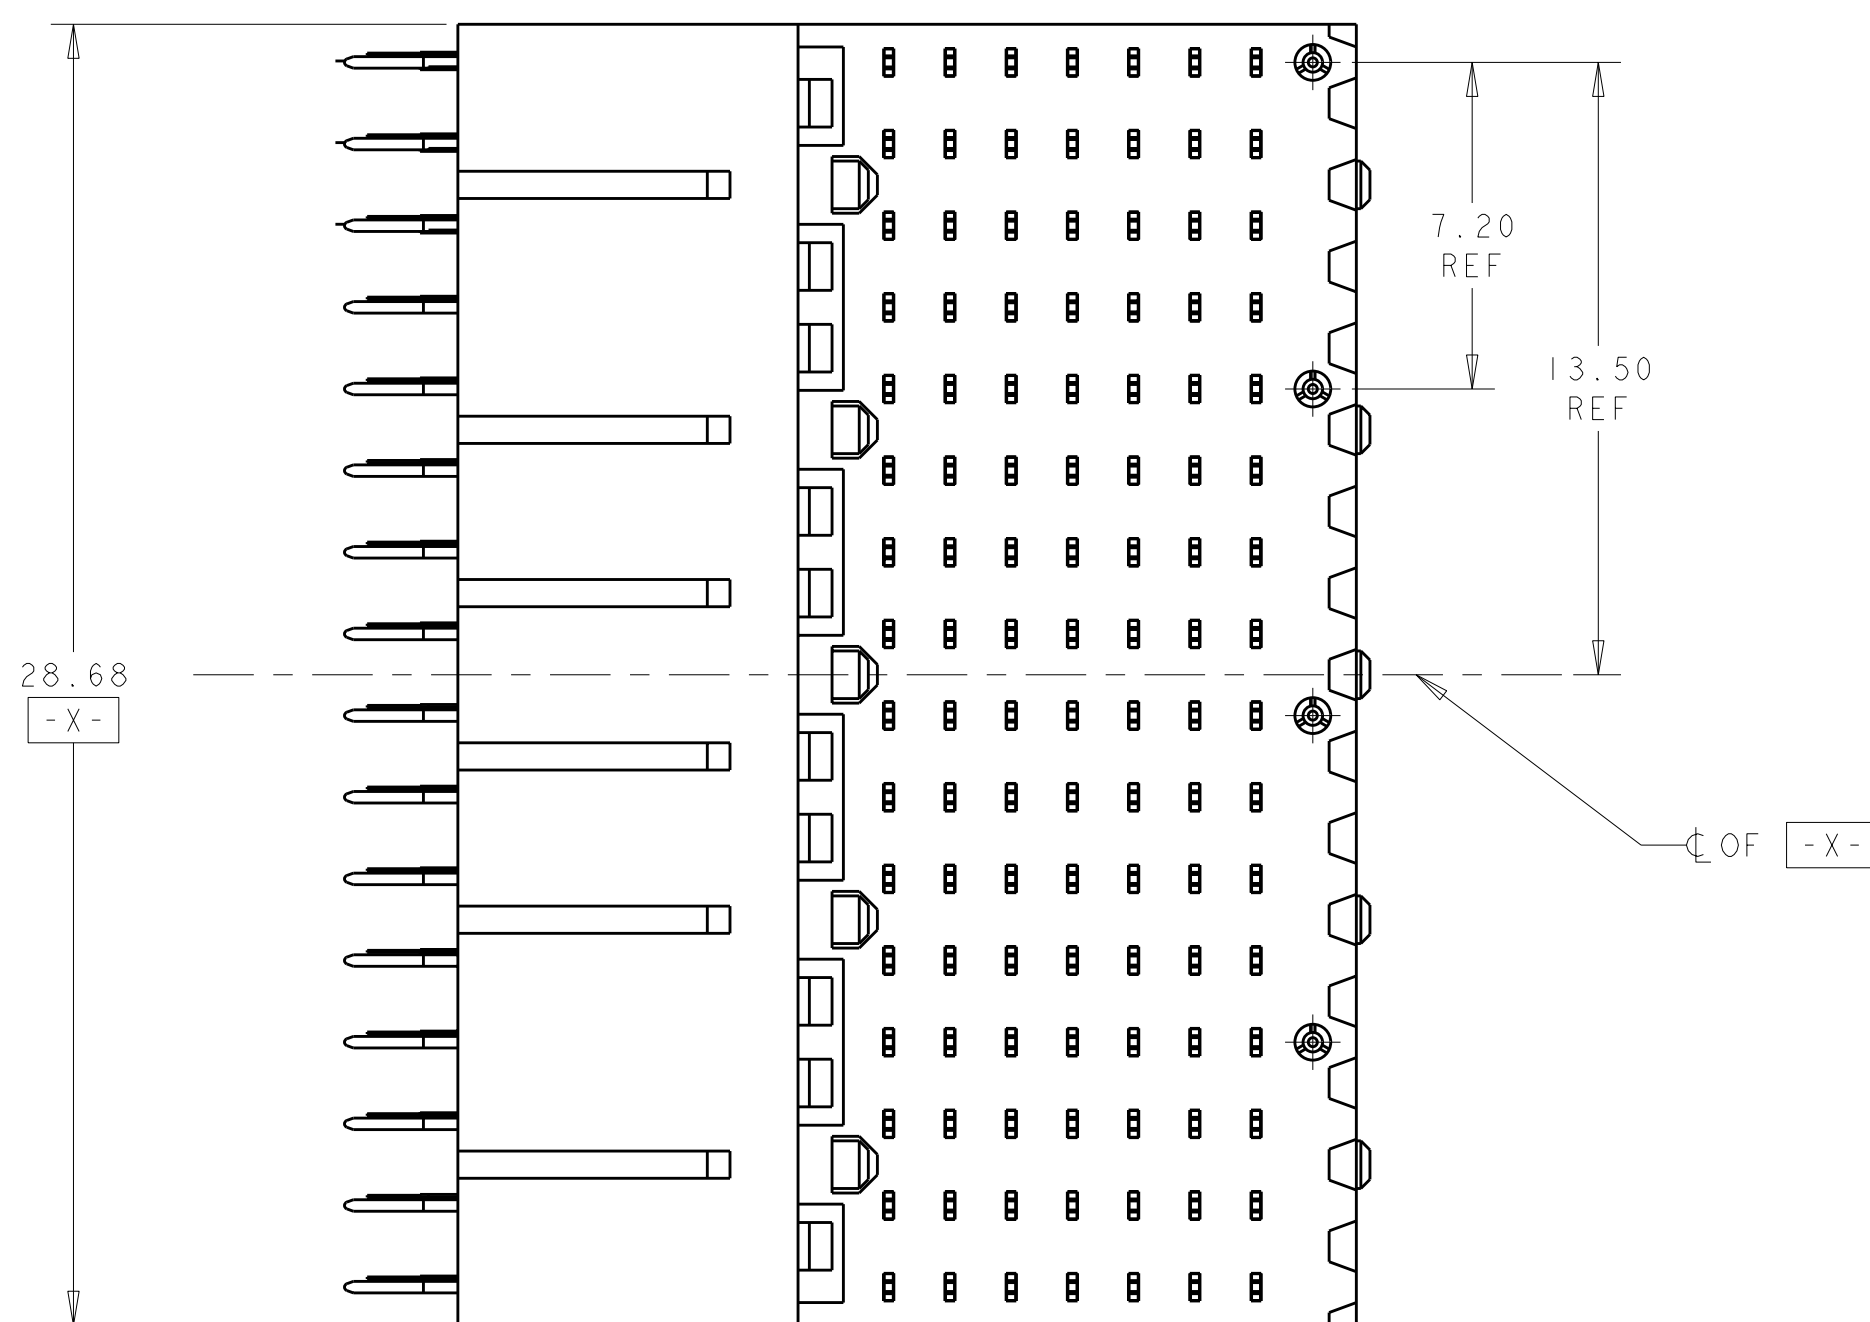
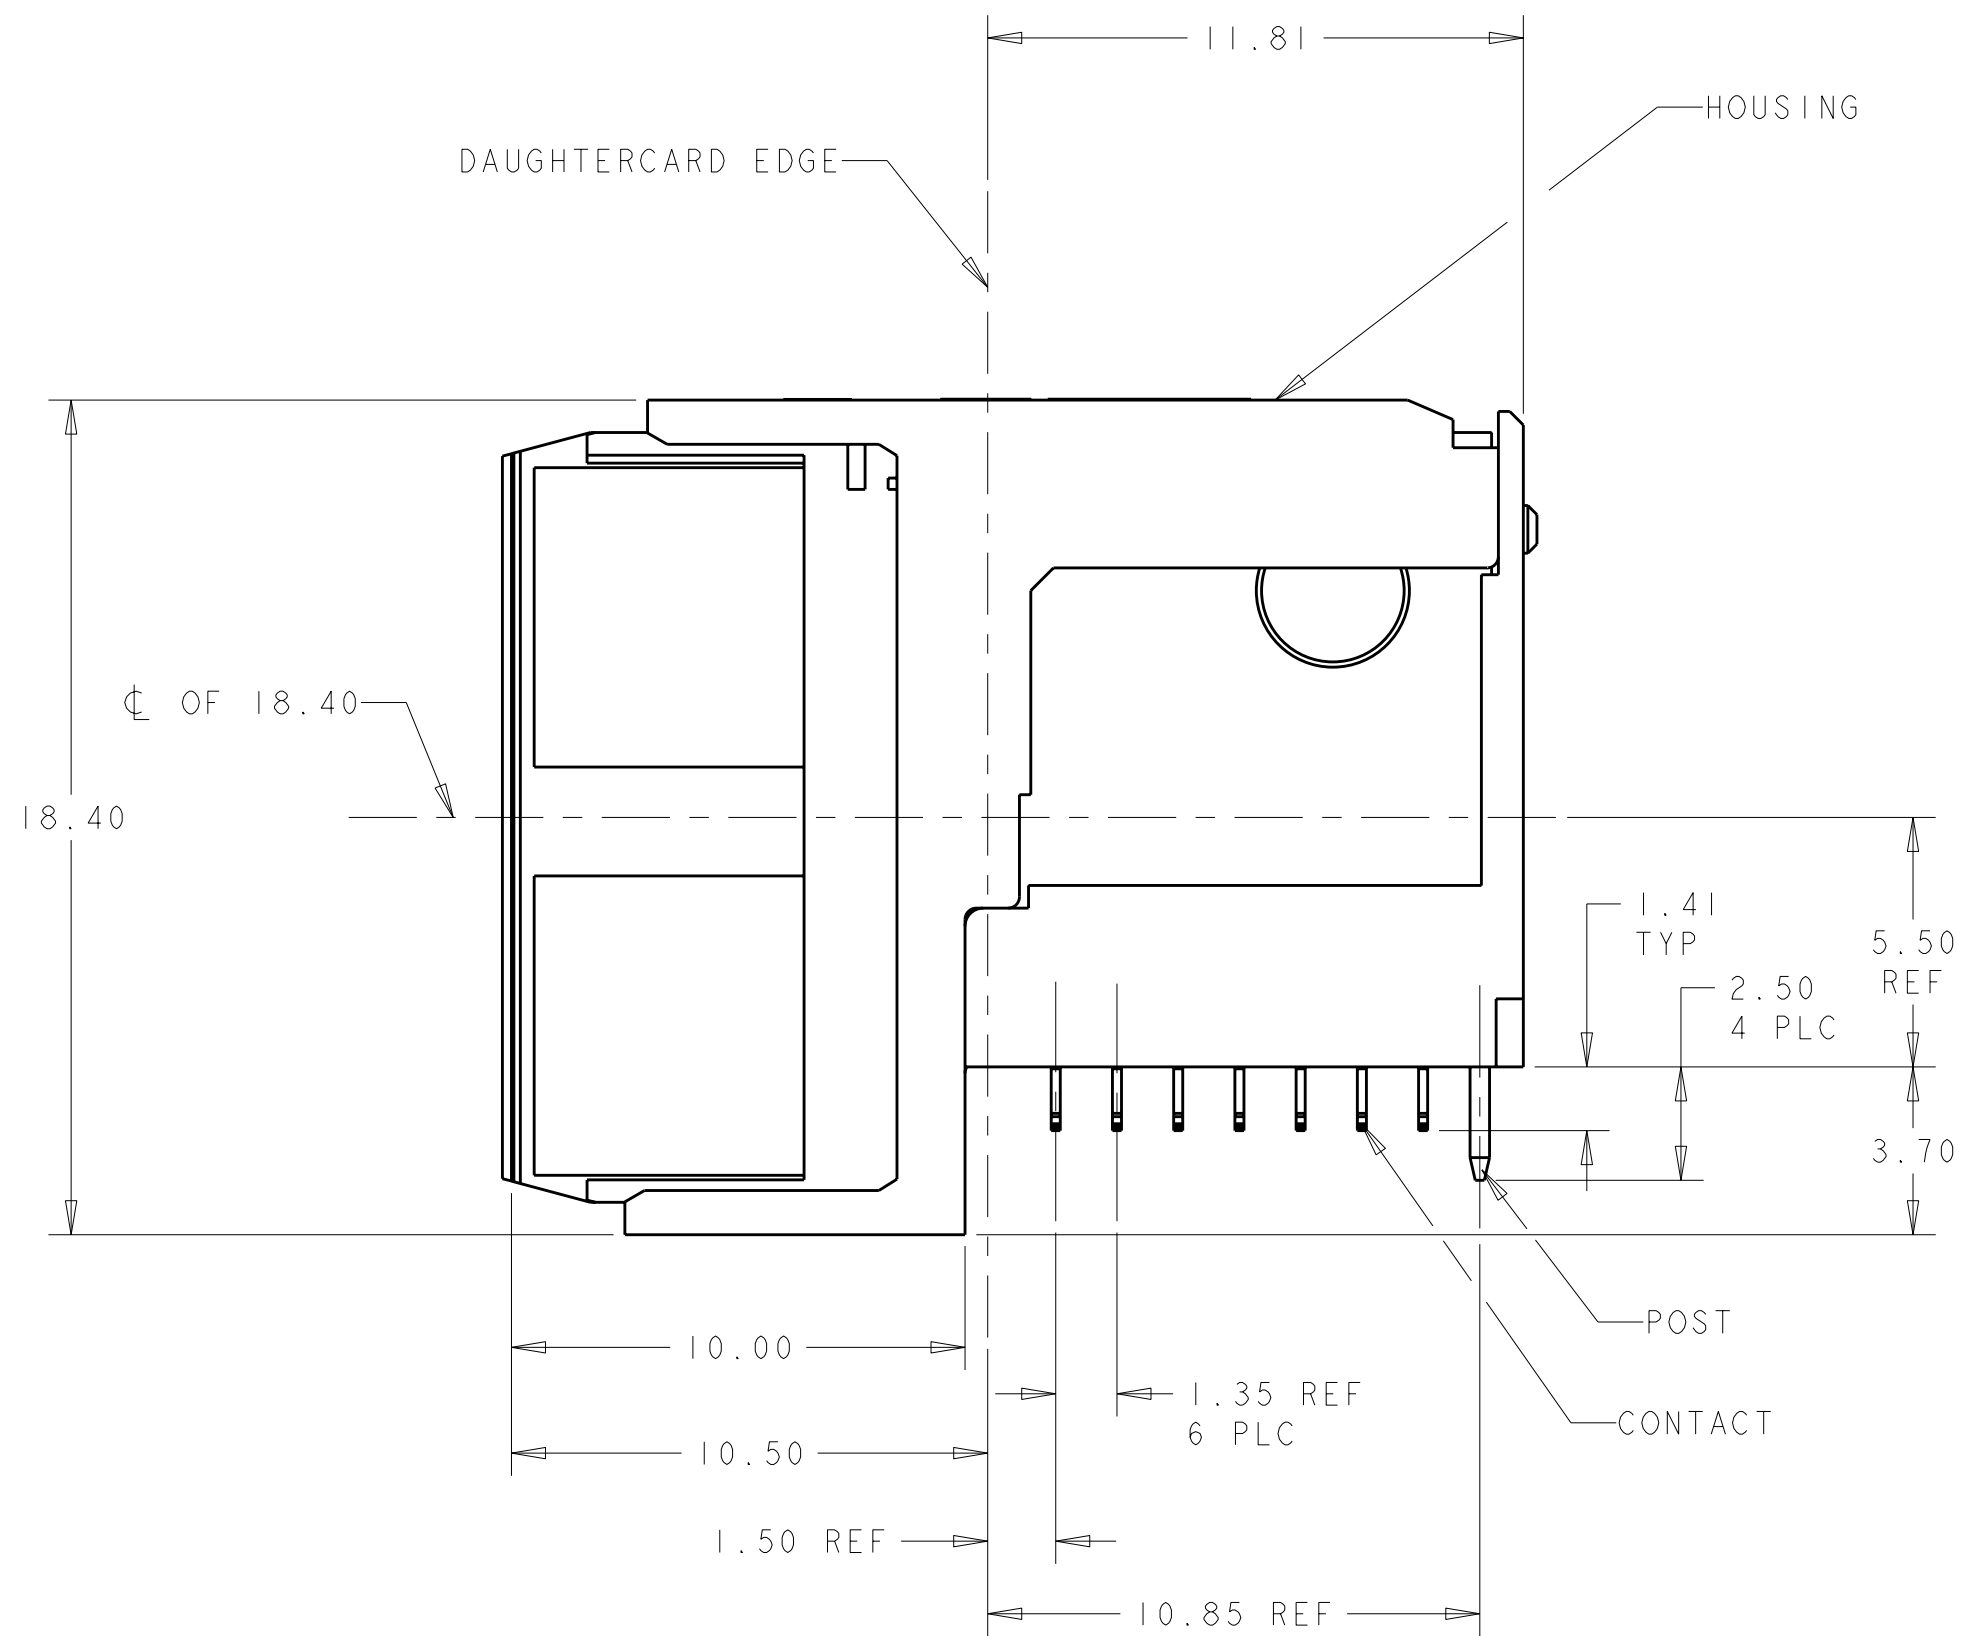




2 MANUFACTURING TOLERANCE FOR $\varnothing 0.46 \pm 0.05$
DIAMETER FINISHED HOLE WITH Sn /PB PLATING:

DRILLED HOLE = $\varnothing 0.55 \pm 0.02$
COPPER PLATING = 0.025-0.050
Sn PB PLATING = 0.0038-0.0124

OR

MANUFACTURING TOLERANCE FOR $\varnothing 0.475 \pm 0.05$
DIAMETER FINISHED HOLE WITHOUT Sn /PB PLATING:

DRILLED HOLE = $\varnothing 0.55 \pm 0.02$
COPPER PLATING = 0.025-0.050

3 SEE TABLE 1 FOR INTERCONNECTIONS TO BACKPLANE CONNECTOR.

4 CONTACT: 0.76 μ m MIN GOLD IN PAD CONTACT AREA
1.27 μ m MIN TIN ON PCB TAIL
OVER 1.27 μ m MIN NICKEL OVER ALL.
POST 1.27 μ m MIN NICKEL PLATED.

5 CONTACT: 1.27 μ m MIN GOLD IN PAD CONTACT AREA
1.27 μ m MIN TIN-LEAD ON PCB TAIL
OVER 1.27 μ m MIN NICKEL OVER ALL.
POST 1.27 μ m MIN NICKEL PLATED.

TABLE I
INTERCONNECTIONS WITH BACKPLANE CONNECTOR 1410326

TYPICAL INTERCONNECTIONS FOR COLUMN (WAFFER): 7, 9, 11, 13, 15		
CONTACT USAGE	DAUGHTERCARD CONNECTOR PIN	BACKPLANE CONNECTOR PIN
SIGNAL PAIR	ax	ax
	bx	bx
SIGNAL PAIR	dx	ex
	ex	fx
SIGNAL	gx	ix
GROUND	c _x , f _x , (ALL COMMONED)	c _x , d _x , g _x , h _x




TYPICAL INTERCONNECTIONS FOR COLUMN (WAFER): 8, 10, 12, 14, 16		
CONTACT USAGE	DAUGHTERCARD CONNECTOR PIN	BACKPLANE CONNECTOR PIN
SIGNAL PAIR	b _x	c _x
	c _x	d _x
SIGNAL PAIR	e _x	g _x
	f _x	h _x
GROUNDS	a _x , d _x , g _x (ALL COMMONED)	a _x , b _x , e _x , f _x , i _x

TYPICAL INTERCONNECTIONS FOR COLUMN (WAFER): 4, 5, 6		
CONTACT USAGE	DAUGHTERCARD CONNECTOR PIN	BACKPLANE CONNECTOR PIN
SIGNAL	a x	b x
SIGNAL	b x	c x
SIGNAL	d x	e x
SIGNAL	f x	g x
SIGNAL	g x	h x
GROUND	c x, e x (ALL COMMONED)	a x, d x, f x, i x

TYPICAL INTERCONNECTIONS FOR COLUMN (WAFER): 1, 2, 3		
CONTACT USAGE	DAUGHTERCARD CONNECTOR PIN	BACKPLANE CONNECTOR PIN
POWER	ax, bx, cx	ax, bx, cx, dx
POWER	ex, fx, gx	fx, gx, hx, ix
NOT CONNECTED	dx	ex

NOTE: " x " DESIGNATES THE COLUMN NUMBER

	1410326-3
PLATING	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT FOR THE CUSTOMER'S INFORMATION. INFORMATION CONTAINED HEREIN IS UNCLASSIFIED EXCEPT WHERE SHOWN OTHERWISE. INFORMATION SHOULD BE CONTROLLED TO THE EXTENT OF THE CLASSIFICATION.		DWN 23JUN2009 BY HUMBERT		Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 P.L.C. ±.05 .005 P.L.C. ±.005 .010 P.L.C. ±.010 .015 P.L.C. ±.015 .020 P.L.C. ±.020 .030 P.L.C. ±.030 .040 P.L.C. ±.040 .050 P.L.C. ±.050 .060 P.L.C. ±.060 .070 P.L.C. ±.070 .080 P.L.C. ±.080 .090 P.L.C. ±.090 ANGLES ±.1°		NAME RIGHT-ANGLE PLUG ASSY, 7 ROW, 20.3mm MULTI-GIG RTS, DIFFERENTIAL, SIGNAL- ENDED AND POWER, CENTER CONN.	
		PRODUCT SPEC 108-272		SIZE CAGE CODE DRAWING NO	
		APPLICATION SPEC 114-13056		RESTRICTED TO	
MATERIAL		WEIGHT -		A 00779 C=1410326	
		CUSTOMER DRAWING		SCALE 6:1 SHEET 1 OF 1 REV A	
					

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru