


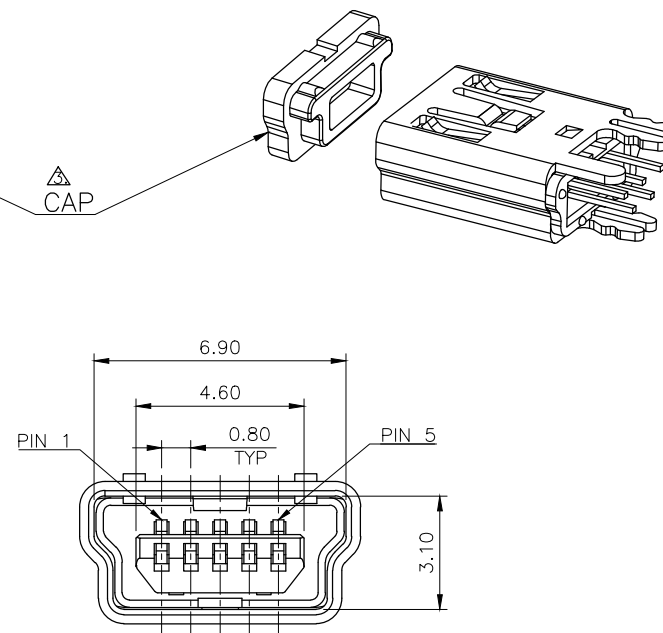

1. MATERIAL:
HOUSING: PA9T, UL 94V-0, BLACK COLOR.
CAP: LCP, UL 94V-0, BLACK COLOR.
CONTACTS: PHOSPHOR BRONZE.
SHELL: PHOSPHOR BRONZE.

2. FINISH:
CONTACTS: $0.762\mu\text{m}$ [$30\mu''$] MIN. GOLD PLATED ON CONTACT AREA,
 $2.54\mu\text{m}$ [$100\mu''$] MIN. MATTE TIN PLATED ON SOLDER TAIL,
 $1.27\mu\text{m}$ [$50\mu''$] MIN. NICKEL UNDERPLATED ALL OVER.
SHELL: $2.54\mu\text{m}$ [$100\mu''$] MIN. BRIGHT TIN PLATED OVER
 $1.27\mu\text{m}$ [$50\mu''$] MIN. NICKEL UNDERPLATED ALL OVER.

△ OPTION PART : CAP

4. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC.
109-201, CONDITION B.

5. CAP WEIGHT : 0.789 gram

WITH	2041517-2
W/O	2041517-1
CAP 	PART NUMBER

RECOMMENDED PCB LAYOUT (THICKNESS:1.6mm)
(DIMENSION TOLERANCE: 1PLC:±0.1 2PLC:±0.05)
⊙ KEEP OUT AREA FOR HOUSING STAND OFF



TE Connectivity

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		S. CHIEN	
mm				APVD 01JUN201	
		0 PLC ± -		PRODUCT SPEC	
		1 PLC ± 0.30		108-57912	
		2 PLC ± 0.20		APPLICATION SPEC	
		3 PLC ± 0.15			
		4 PLC ± -			
ANGLES ± 3'					
MATERIAL		FINISH		WEIGHT	
SEE NOTE		SEE NOTE		0.725 g	
				CUSTOMER DRAWING	

NAME			
MINI USB CONNECTOR, RECEPTACLE VERTICAL, DIP, B TYPE			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C=2041517	—
SCALE		SHEET	REV
—		1 OF 3	A 1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-

C

COPYRIGHT 2010

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR


DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

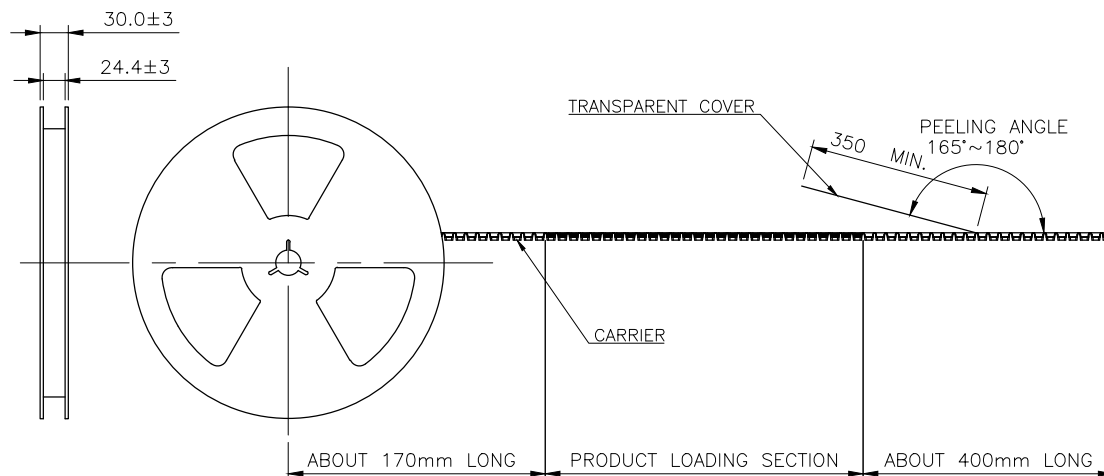

NOTE:

1. MATERIAL:

COVER TAPE: PET, WHITE COLOR.

CARRIER TAPE: PS.

REEL: PS.

SHIPPING BOX: CORRUGATED FIBER.

2. DIMENSION:

REEL: SEE DRAWING.


SHIPPING BOX: SEE DRAWING.

3. QUANTITY: SEE TABLE.

4. WEIGHT: SEE TABLE.



5. PEELING RESISTANCE: 10gf ~ 130gf

6. PEELING SPEED: 300mm/MINUTE.

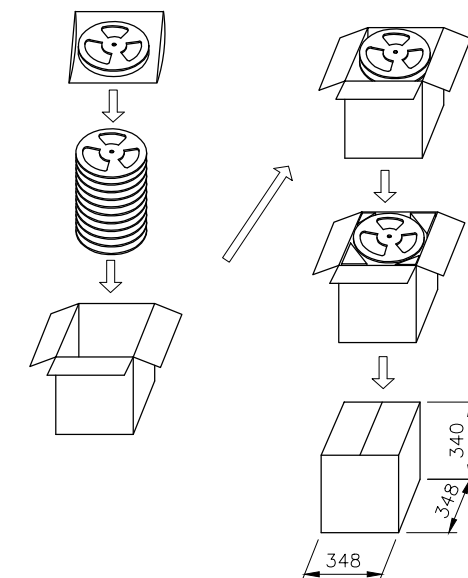

PACKAGING PROCESS

12.5 KG	9.13 KG	1200	10	12000	2041517-1
GROSS WEIGHT	NET WEIGHT	PCS /REEL	REELS /BOX	QUANTITY	PART NUMBER

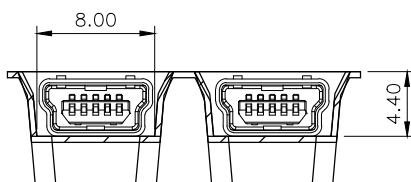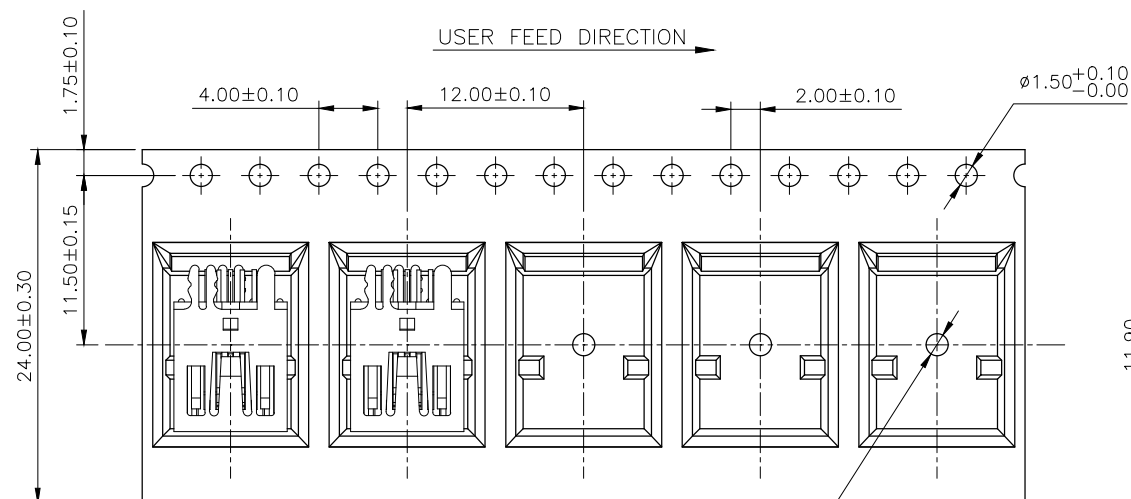

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC

1 PLC

2 PLC

3 PLC

4 PLC

ANGLES

FINISH

± -


± 0.30

± 0.30

± 0.30

± -

± -



MATERIAL

FINISH

TE Connectivity

TE Connectivity

NAME

MINI USB CONNECTOR, RECEPTACLE VERTICAL, DIP, B TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=2041517

SCALE

SHEET

2 OF 3

REV A1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- - -

ALL RIGHTS RESERVED.



COPYRIGHT 2010 BY TYCO ELECTRONICS CORPORATION.

LOC

DIST

REVISIONS

P

LTR


DESCRIPTION

DATE

DWN


APVD

SEE SHEET 1.

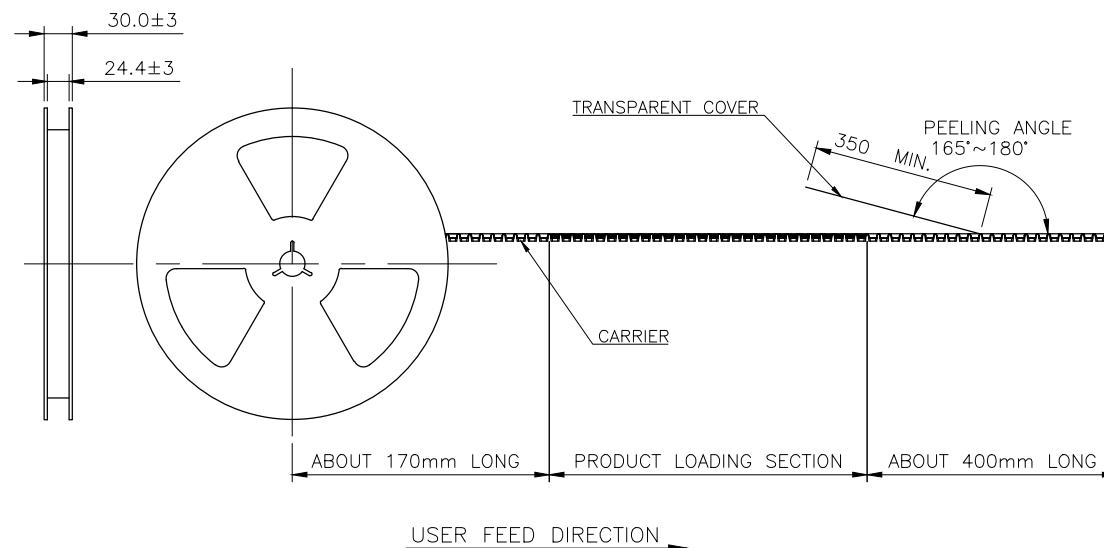




NOTE:

1. MATERIAL:
COVER TAPE: PET, WHITE COLOR.
CARRIER TAPE: PS.
REEL: PS.
SHIPPING BOX: CORRUGATED FIBER.
2. DIMENSION:
REEL: SEE DRAWING.
SHIPPING BOX: SEE DRAWING.
3. QUANTITY: SEE TABLE.
4. WEIGHT: SEE TABLE.
5. PEELING RESISTANCE: 10gf ~ 130gf
6. PEELING SPEED: 300mm/MINUTE.

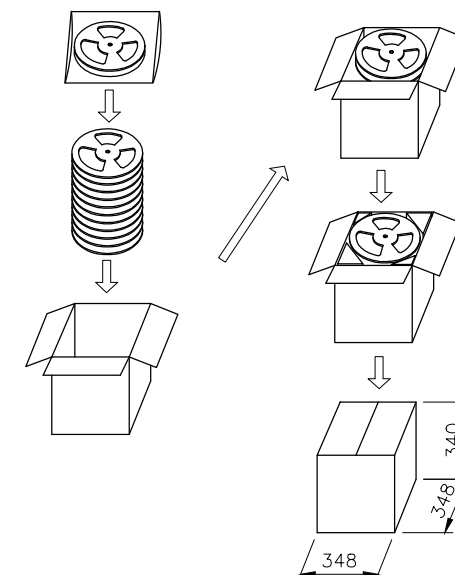

PACKAGING PROCESS

6.70KG	2.60 KG	300	10	3000	2041517-2
GROSS WEIGHT	NET WEIGHT	PCS /REEL	REELS /BOX	QUANTITY	PART NUMBER

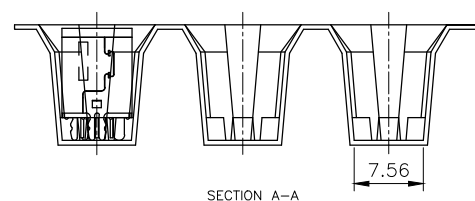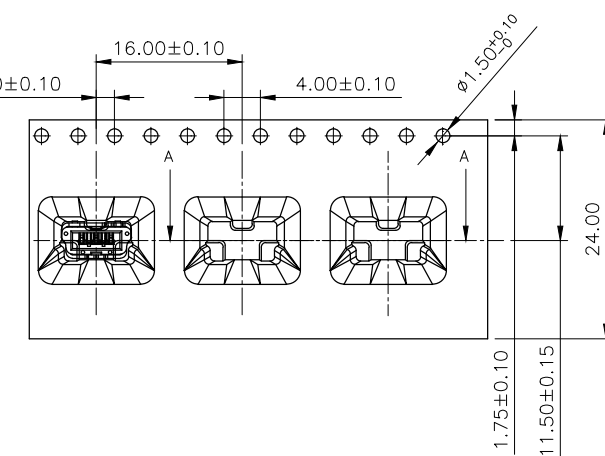

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± 0.30
2 PLC	± 0.30
3 PLC	± 0.30
4 PLC	± -
ANGLES	± -

MATERIAL

FINISH

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

MINI USB CONNECTOR, RECEPTACLE
VERTICAL, DIP, B TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=2041517

SCALE

SHEET

3 of 3

REV A1

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru