



NOTES:

1. MATERIALS AND FINISHES:
BODY - BRASS, GOLD PLATING, .000030 INCH [0.0008 MM] THICK OVER COPPER
CONTACT - BERYLLIUM COPPER, GOLD PLATING, .000030 INCH [0.0008 MM] THICK OVER COPPER
INSULATOR - PEEK OR LCP, NATURAL
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC - 12 GHz
C. VSWR(RETURN LOSS): 1.10 (26 dB), MAX. DC-6GHz
1.20 (21 dB), MAX. 6-12GHz
D. DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS, MIN.
3. PHYSICAL:
A. DURABILTIY: 500 CYCLES MIN.
B. ENGAGEMENT FORCE: 10 LB [45 N] MAX
C. DISENGAGEMENT FORCE: 2 LB [9 N] MIN
D. INNER CONTACT RETENTION FORCE: 1.5 LB [7 N] MIN
E. TEMERATURE RANGE: -65° C TO 165° C
F. INSULATOR MATERIAL RATED TO UL94 V-0
4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: AMPHENOL, SMP-MSLD-PCR, DATE CODE


THIRD ANGLE PROJ.

REVISIONS


REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG	9/12/05	45722	MY
E	ADDED UL RATING FOR INSULATOR MATERIAL	28-Jul-11	47682	SH

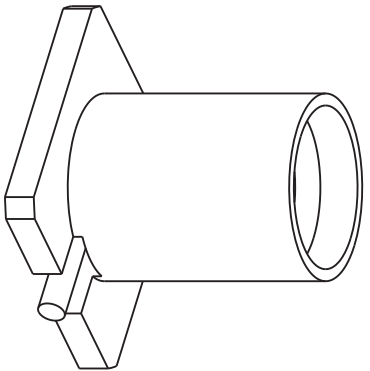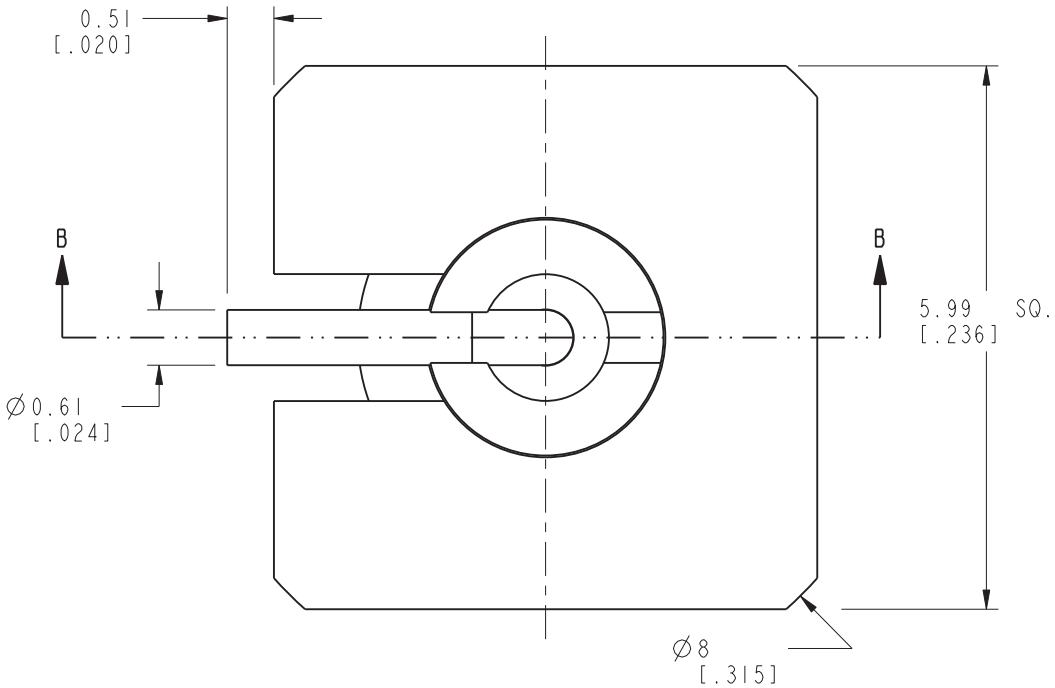

SCALE 6.000

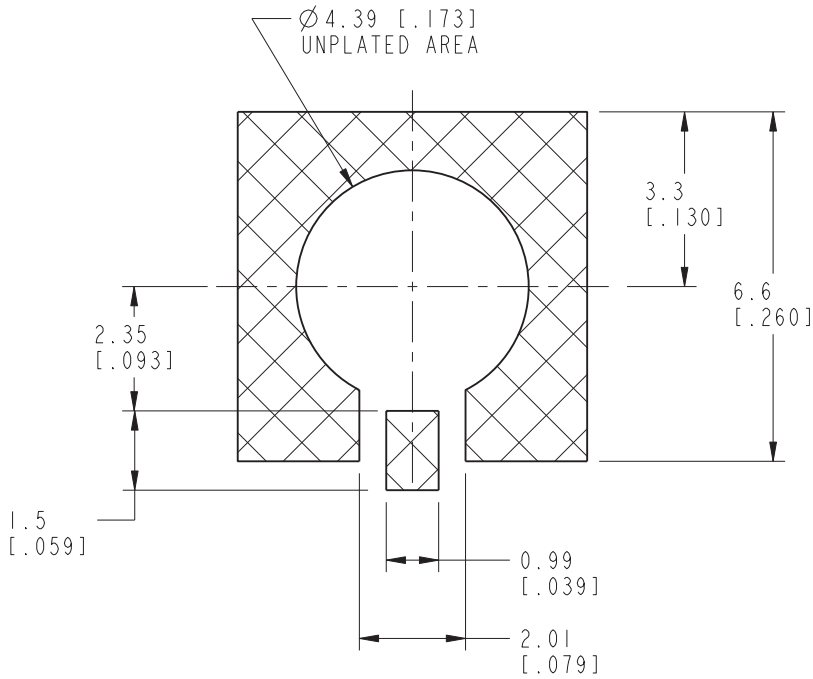

RECOMMENDED PCB PAD LAYOUT
SCALE 7.000

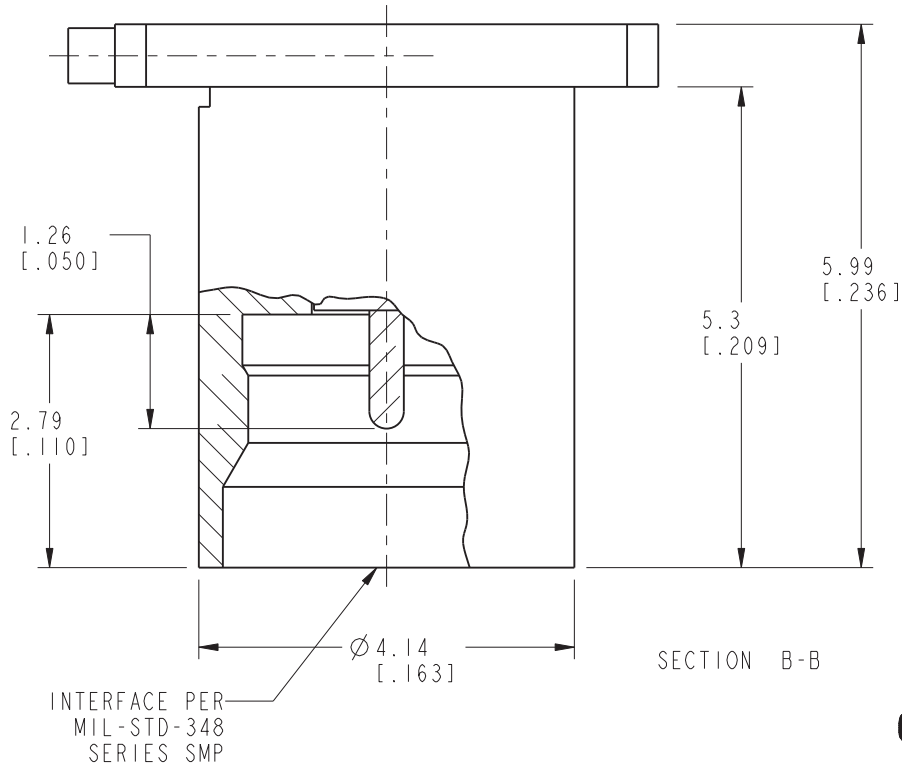

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
<0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ± 1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL

DRAWN
T.DENG

DATE
25-Jul-11

ENGINEER
OWEN BARTHELMES

DATE
25-Apr-01

REFERENCE
GEN# ASSYM2-SMP
EAR# 283
615X-1690-100

CONFIGURATION LEVEL:

FINISH

APPROVED

S.HSIEH

CAD FILE

DATE
28-Jul-11

TITLE
ASSEMBLY,
PC BOARD, REAR MOUNT
LIMITED DETENT

SCALE: 12.0:1.0 SHEET 2 OF 2

DWG SIZE

B

REV

E

Amphenol RF

www.amphenolrf.com

DRAWING NO. SMP-MSLD-PCR

ITEM NO. SMP-MSLD-PCR

PART NO. SMP-MSLD-PCR

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru