


Paper Capacitors Metal Case, Film/Foil, 10 Ampere Thru-Pass, Subminiature

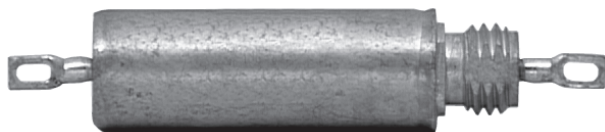

FEATURES

- Bulkhead mounting
- Excellent RFI specifications
- Hermetically enclosed
- Low inductance connection
- Low insertion loss

PERFORMANCE CHARACTERISTICS

Operating Temperature: - 55°C to + 125°C.

Capacitance Range: 0.001 μ F to 1.0 μ F.

Capacitance Tolerance: $\pm$ 20%, $\pm$ 10%.

Voltage Rating: 200 WVDC to 600 WVDC.

Current Rating: 10 ampere maximum.

Dissipation Factor: 1.0% maximum.

DC Resistance: 0.01 ohm maximum.

Voltage Test: 200% of rated voltage for 1 minute.

Insulation Resistance: At + 25°C: 20,000 Megohm - Microfarads or 30,000 Megohm minimum. At + 85°C: 200 Megohm - Microfarads or 300 Megohm minimum.

ENVIRONMENTAL CHARACTERISTICS

Vibration Test (Condition A): No mechanical damage, short, open or intermittent circuits.

DC Life Test: 140% of rated voltage for 250 hours @ + 125°C. No open or short circuits. No visible damage. Maximum Δ Cap.: $\pm$ 5%. Minimum I.R. = 30% of initial limit. Maximum D.F. = 1.5%.

Moisture Resistance: MIL-STD-202, Method 106E, 10 cycles. No visible damage. Maximum Δ Cap.: $\pm$ 5%. Minimum I.R. = 30% of initial limit. Maximum D.F. = 1.5%.

Thermal Shock and Immersion Cycling: No visible damage. Maximum Δ Cap.: $\pm$ 5%. Minimum I.R. = 30% of initial limit. Maximum D.F. = 1.5%.


PHYSICAL CHARACTERISTICS

Lead Pull: 5 pounds (2.3 kilograms) for one minute. No physical damage.

Lead Bend: After three complete consecutive bends, no damage.



Marking: Sprague® trademark, type or part number, capacitance and voltage.

DIMENSIONS in inches [millimeters]

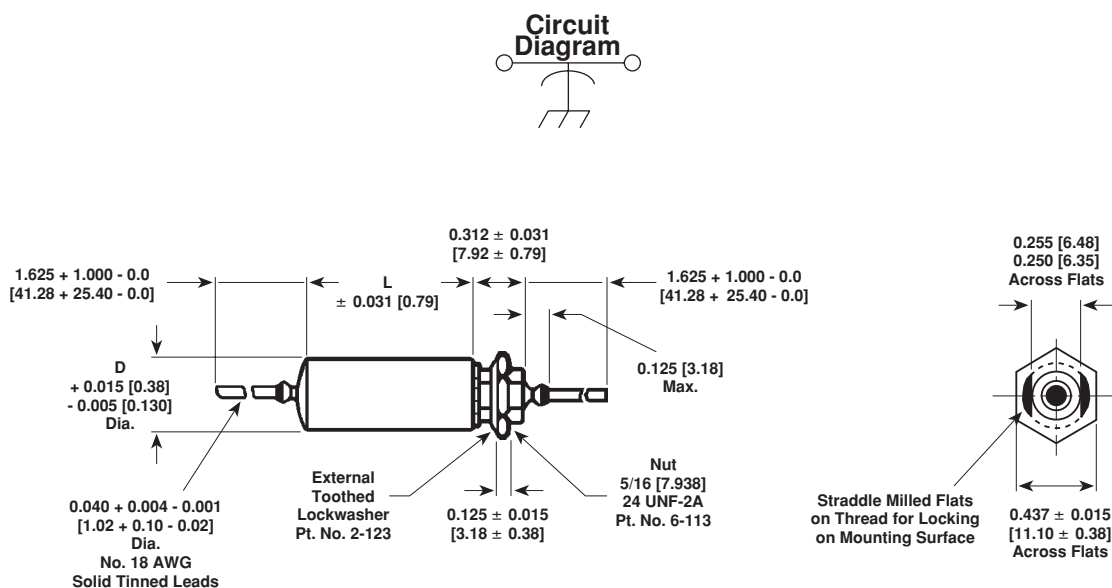

DIMENSIONS in inches [millimeters]

Tab Terminals

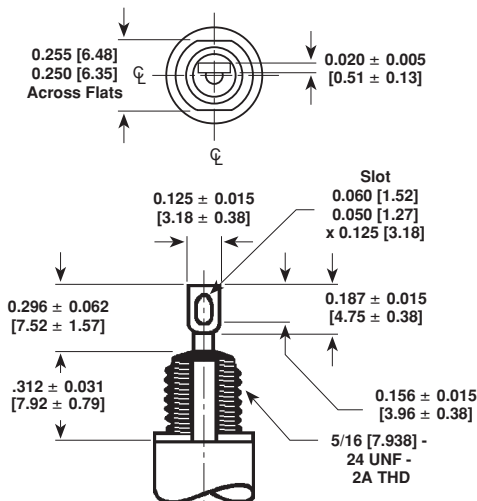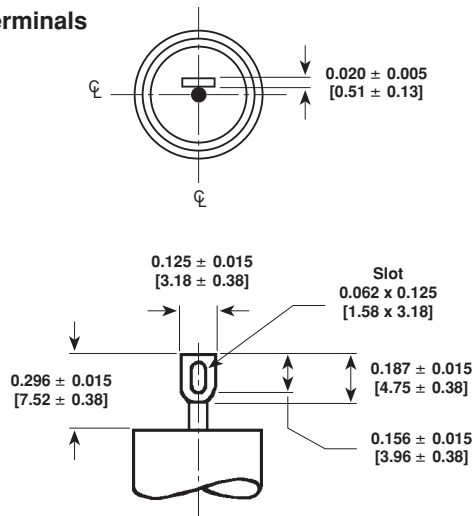**STANDARD RATINGS** in inches [millimeters]

CAPACITANCE (μF)	PART NUMBER*		NOMINAL CASE SIZE D x L
	TAB TERMINAL	WIRE LEAD	
200 WVDC			
0.047	103P473X0200T	103P473X0200S	0.400 x 0.875 [10.16 x 22.23]
0.10	103P104X0200T**	103P104X0200S	0.400 x 1.125 [10.16 x 28.58]
0.22	103P224X0200T	103P224X0200S	0.562 x 1.125 [14.27 x 28.58]
0.47	103P474X0200T**	103P474X0200S	0.562 x 1.875 [14.27 x 47.63]
1.00	103P105X0200T	103P105X0200S	0.750 x 2.125 [19.05 x 53.98]
300 WVDC			
0.047	103P473X0300T	103P473X0300S	0.400 x 1.125 [10.16 x 28.58]
0.10	103P104X0300T	103P104X0300S	0.400 x 1.375 [10.16 x 34.93]
0.22	103P224X0300T	103P224X0300S	0.562 x 1.375 [14.27 x 34.93]
0.47	103P474X0300T	103P474X0300S	0.670 x 1.875 [17.02 x 47.63]
400 WVDC			
0.047	103P473X0400T	103P473X0400S	0.400 x 1.375 [10.16 x 34.93]
0.10	103P104X0400T**	103P104X0400S*	0.562 x 1.125 [14.27 x 28.58]
0.22	103P224X0400T**	103P224X0400S*	0.562 x 1.875 [14.27 x 47.63]
0.47	103P474X0400T	103P474X0400S	0.750 x 2.125 [19.05 x 53.98]
600 WVDC			
0.001	103P102X0600T	103P102X0600S	0.400 x 0.750 [10.16 x 19.05]
0.0047	103P472X0600T**	103P472X0600S*	0.400 x 0.750 [10.16 x 19.05]
0.01	103P103X0600T**	103P103X0600S*	0.400 x 0.750 [10.16 x 19.05]
0.047	103P473X0600T	103P473X0600S	0.400 x 1.375 [10.16 x 34.93]
0.10	103P104X0600T**	103P104X0600S*	0.562 x 1.375 [14.27 x 34.93]
0.22	103P224X0600T**	103P224X0600S*	0.670 x 1.875 [17.02 x 47.63]
0.47	103P474X0600T	103P474X0600S	0.750 x 2.375 [19.05 x 60.32]

* The Part Numbers given are for capacitance tolerance of $\pm 20\%$. To specify $\pm 10\%$ tolerance, change X0 to X9.

** All standard inventoried Part Numbers will be stocked with a $\pm 10\%$ tolerance (X9).

ORDERING INFORMATION

103P
TYPE

473

CAPACITANCE

This is expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros to follow.

X0

CAPACITANCE
TOLERANCE

X0 = $\pm 20\%$
X9 = $\pm 10\%$
(Inventoried)

200

DC VOLTAGE
RATING

This is expressed in volts.

S

TERMINAL

S = Wire Leads
T = Soldering Tab

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru