
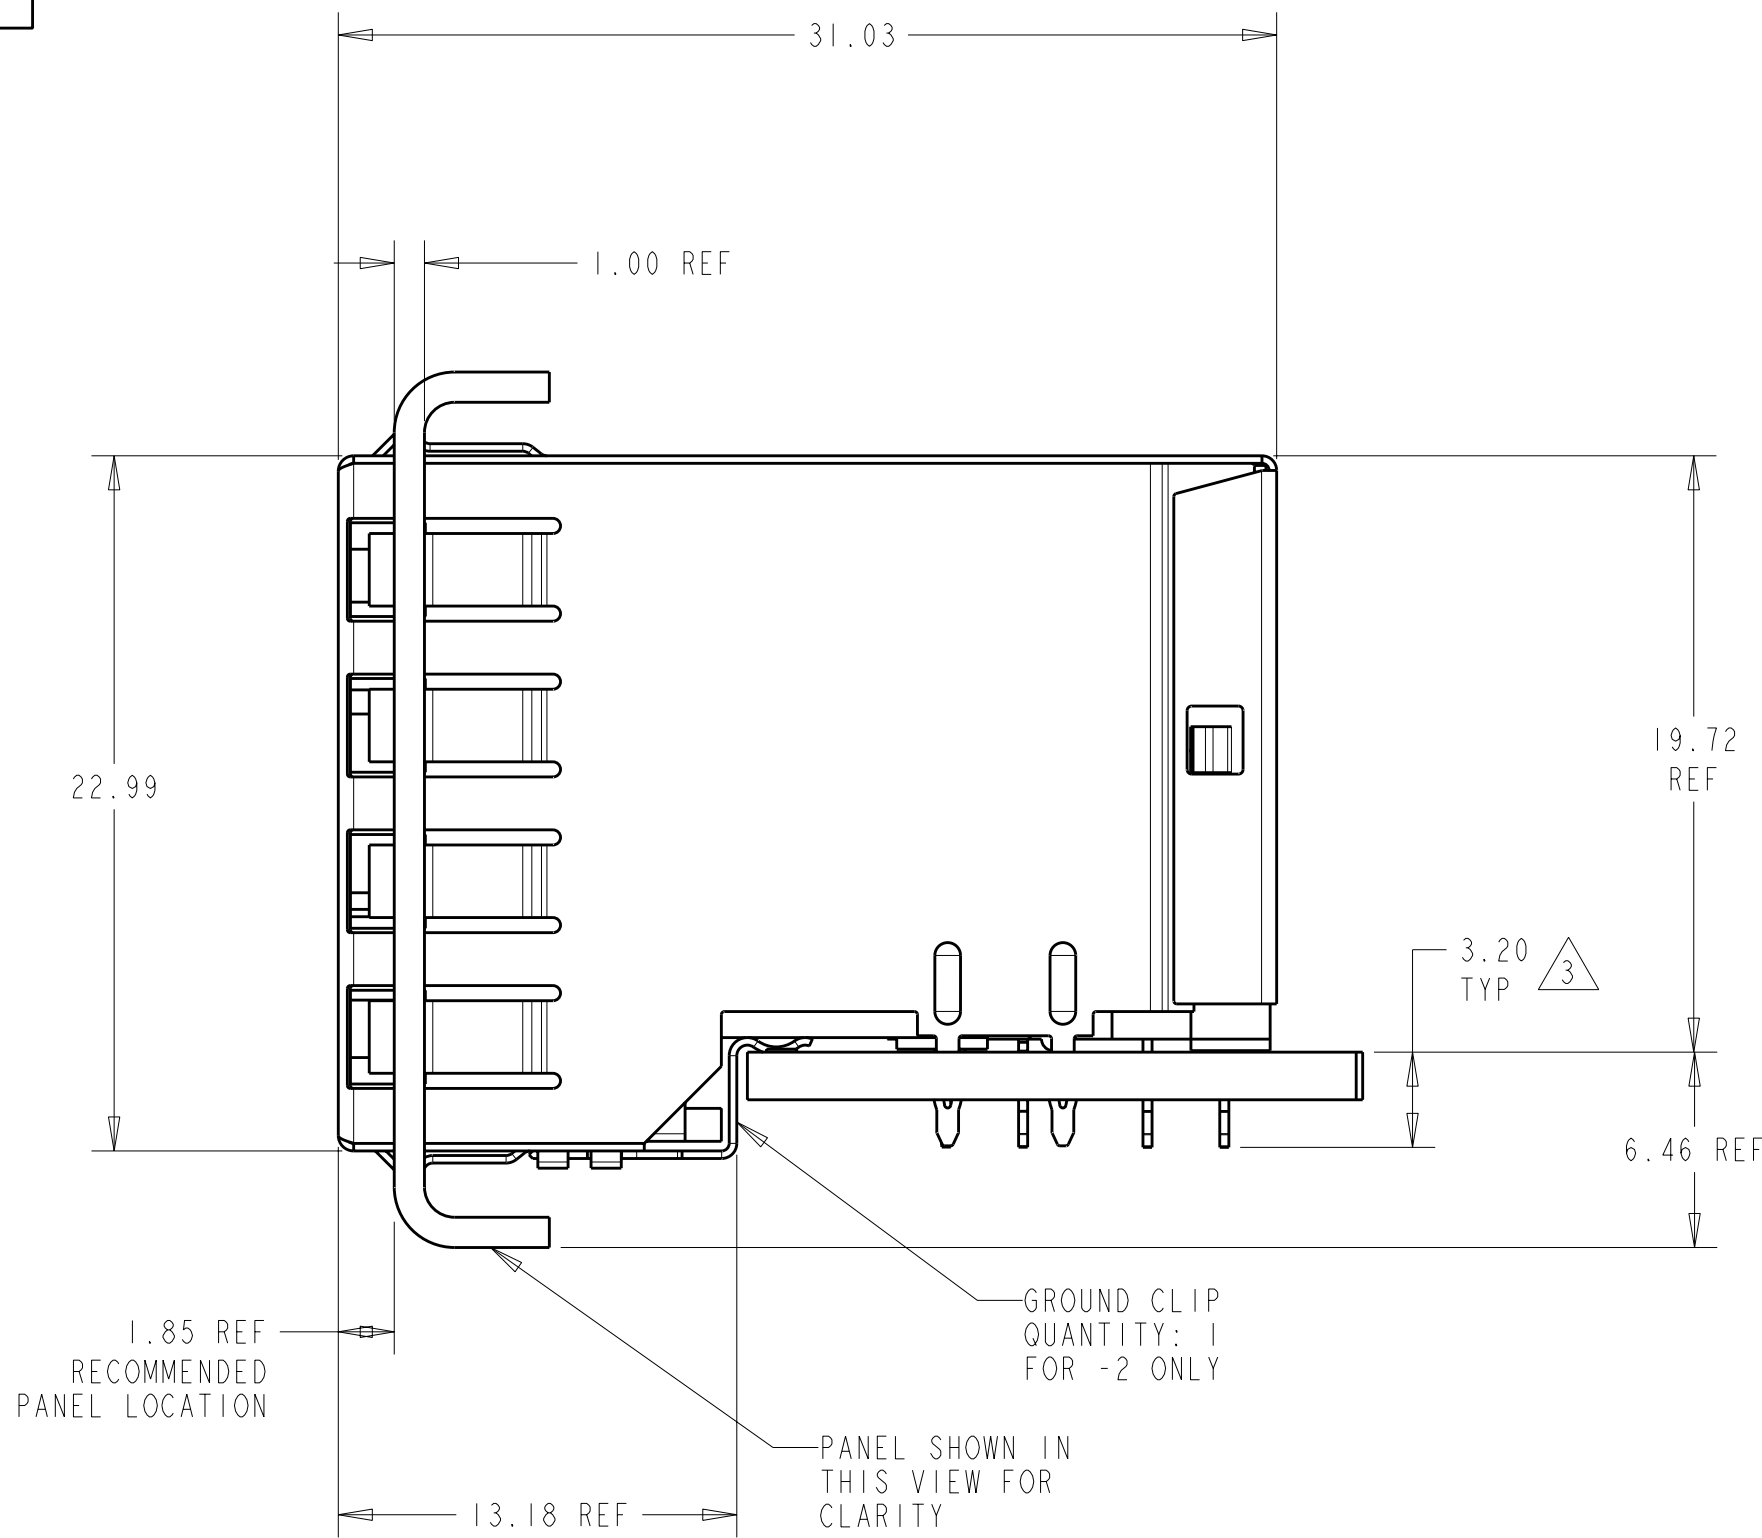


D


C

B


A

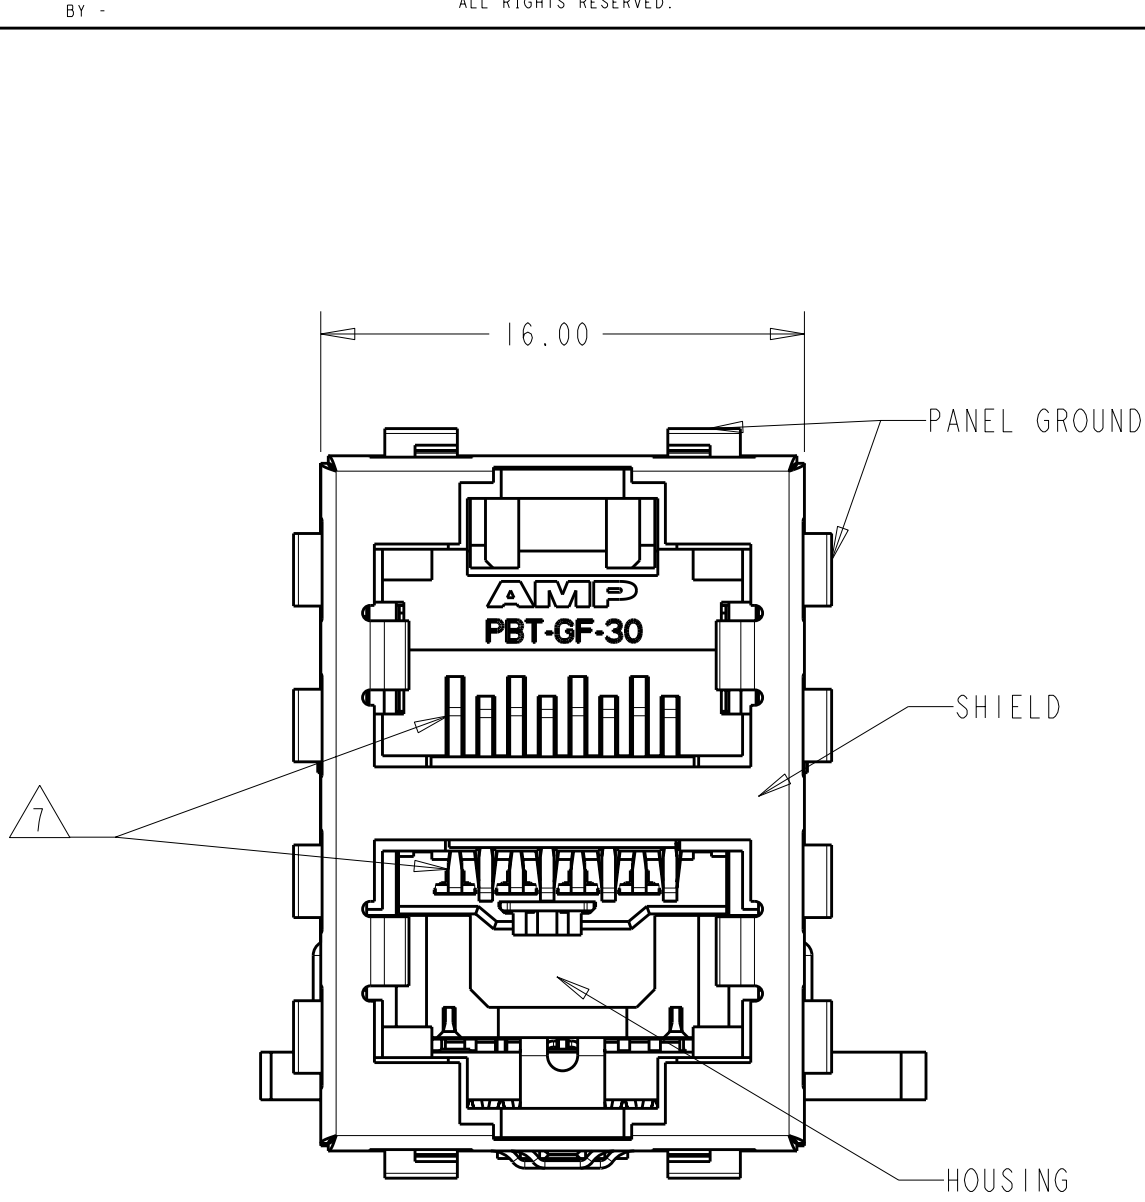

ATCA PANEL AND
PRINTED CIRCUIT BOARD
ASSEMBLY LAYOUT

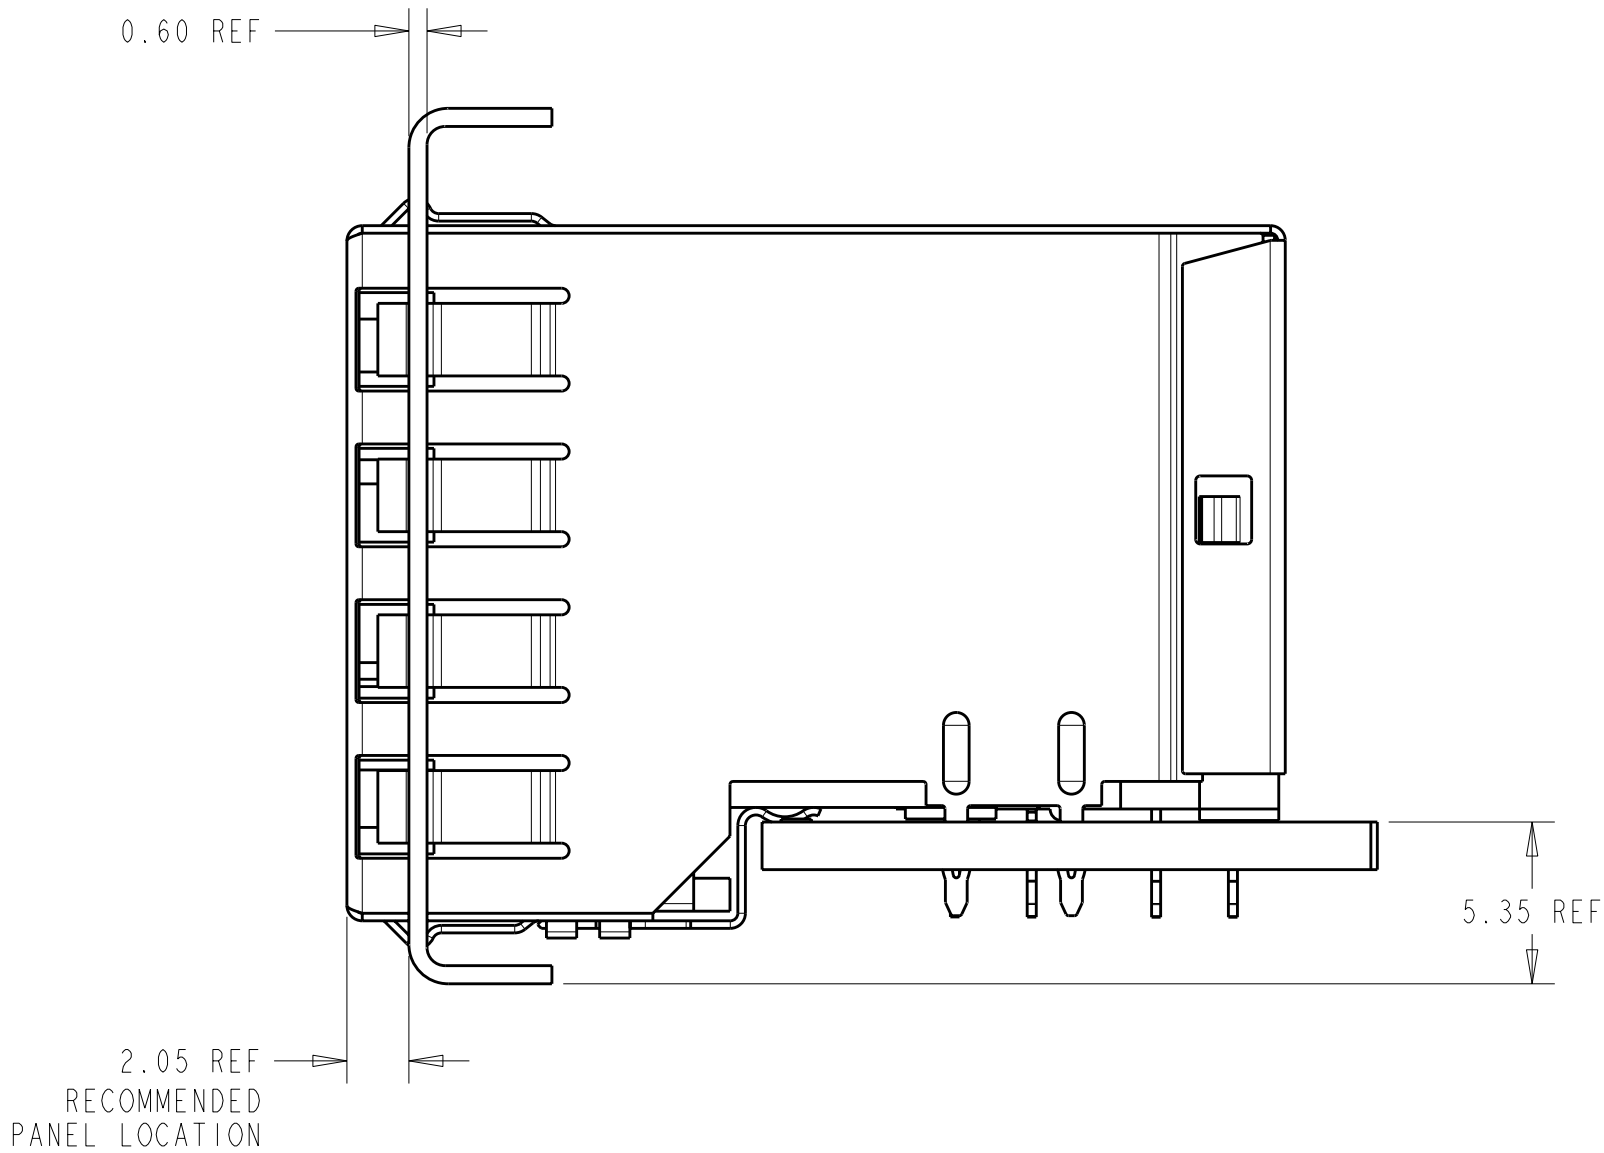


AMC PANEL AND
PRINTED CIRCUIT BOARD
ASSEMBLY LAYOUT

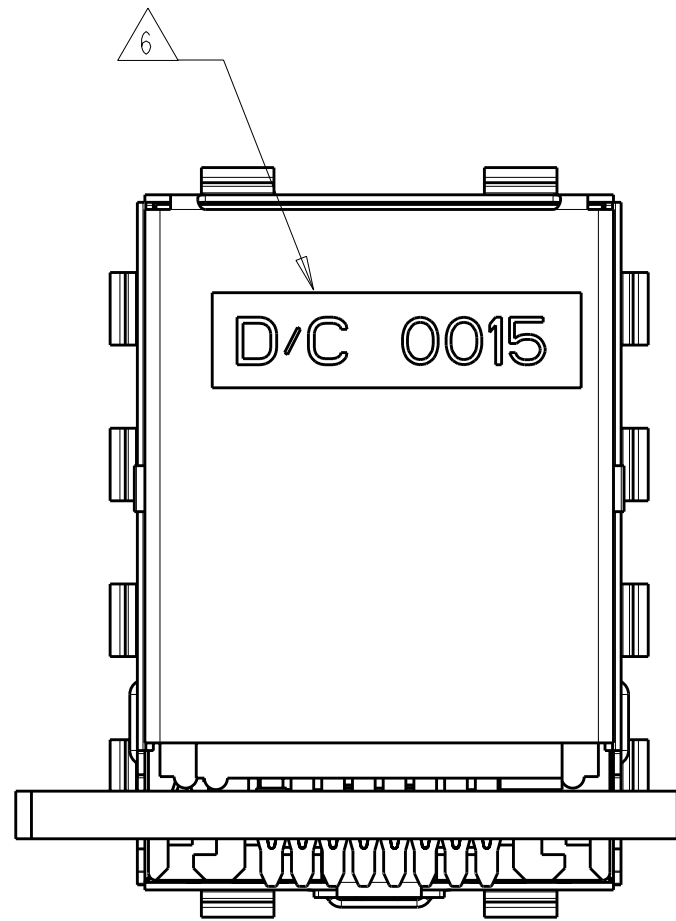


1. MATERIAL:
HOUSING:
PBT POLYESTER, BLACK, UL 94V-0
TERMINALS:
0.33 THICK PHOSPHOR BRONZE PLATED WITH 1.27µm MINIMUM THICK
HARD GOLD IN LOCALIZED AREA AND 3.81µm MINIMUM THICK
TIN IN ACTION PIN COMPLIANT PIN TERMINAL AREA
OVER 1.27µm MINIMUM THICK NICKEL UNDERPLATE
SHIELD:
0.25 THICK COPPER ALLOY PLATED WITH 2.03µm MINIMUM TIN
OVER 1.27 µm MINIMUM NICKEL
GROUND CLIP: 0.25 THICK COPPER ALLOY PRE-PLATED WITH 2.03µm
MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL
2. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68
SUBPART F.


- 3 MAXIMUM PIN LENGTH 3.40 FROM TOP SURFACE OF PC BOARD
4 FINISH PLATED THRU HOLE DIAMETER
ANNULAR RING DIAMETER 1.3 TO 1.5
5 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
6 DATE CODE LOCATED ON REAR OF PART APPROXIMATELY AS SHOWN
7 CONTACTS ARE NOT INTENDED TO BE ALIGNED WITH EACH OTHER

15.88	WITH GROUND CLIP	1888652-2 (SHOWN)
16.13	WITHOUT GROUND CLIP	1888652-1
M DIM	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN L.A.MAYER 16OCT2006	 TE Connectivity	
DIMENSIONS:		CHK J.WESTMAN 16OCT2006		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD S.FLICKINGER 16OCT2006	NAME STACKED MOD JACK ASSEMBLY, 2 X 1, 2 POSN, RJ45, SHIELDED, PANEL GROUND, OFFSET, CAT 5	
	9 PLC ±	PRODUCT SPEC	SIZE	
	1 PLC ±	108-1854	CAGE CODE	
	3 PLC ±	APPLICATION SPEC	DRAWING NO	
MATERIAL	4 PLC ±	114-2160	A1 00779	
SEE NOTE 1	FINISH	WEIGHT	C=1888652	
		CUSTOMER DRAWING	SCALE 2:1 SHEET 1 OF 2 REV C2	

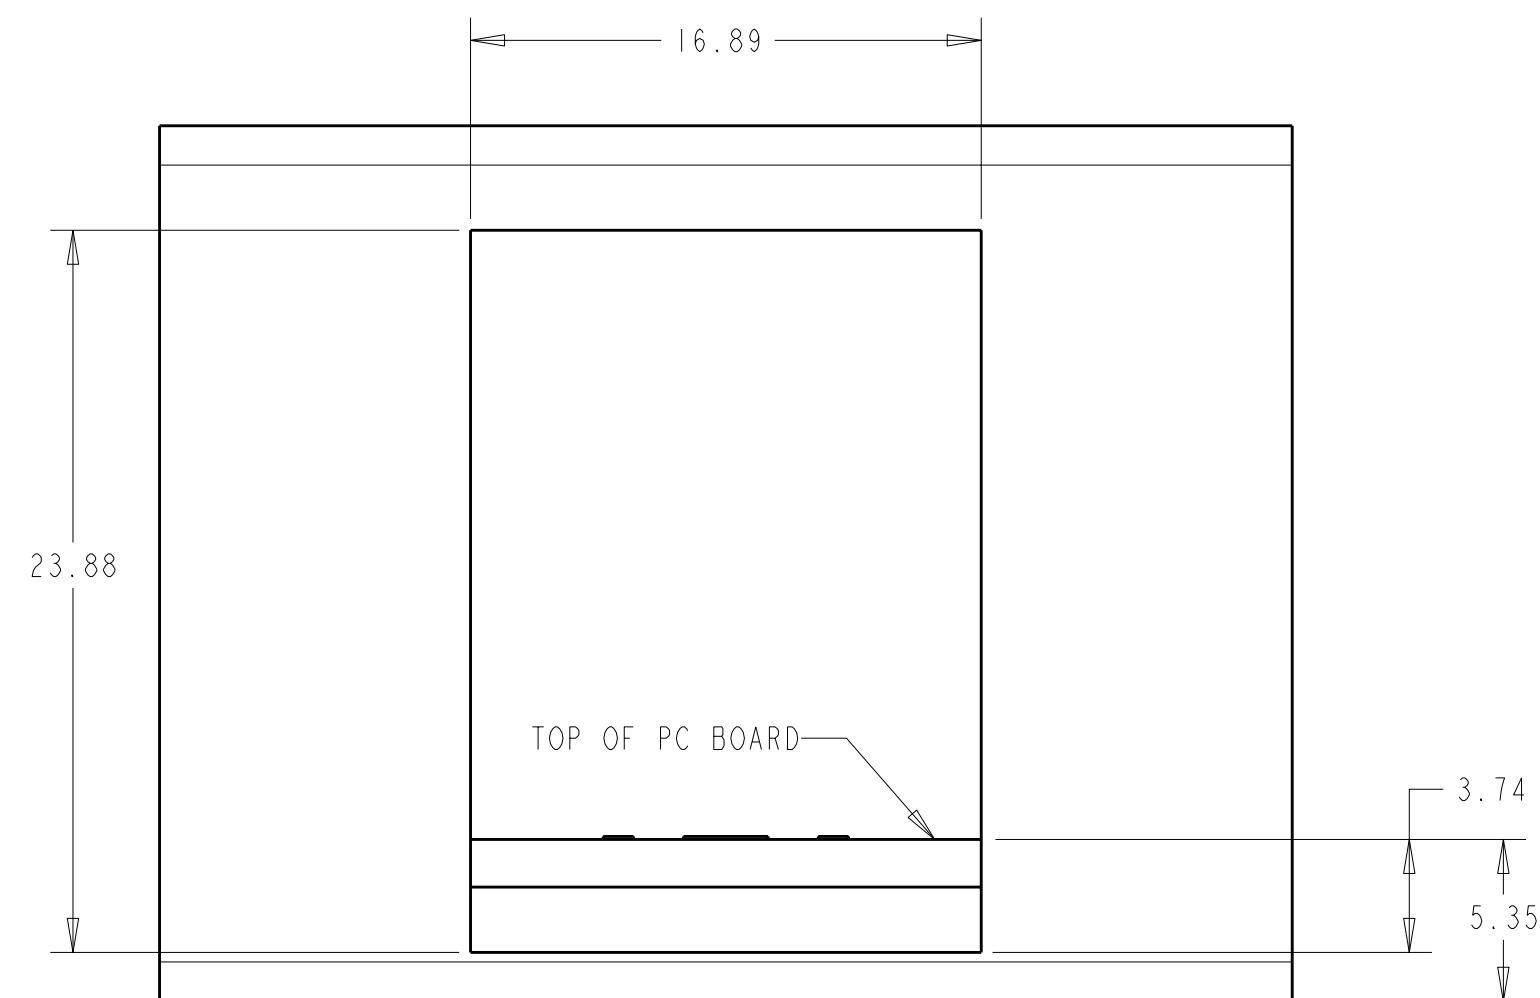

AMC PANEL AND PRINTED CIRCUIT BOARD LAYOUT

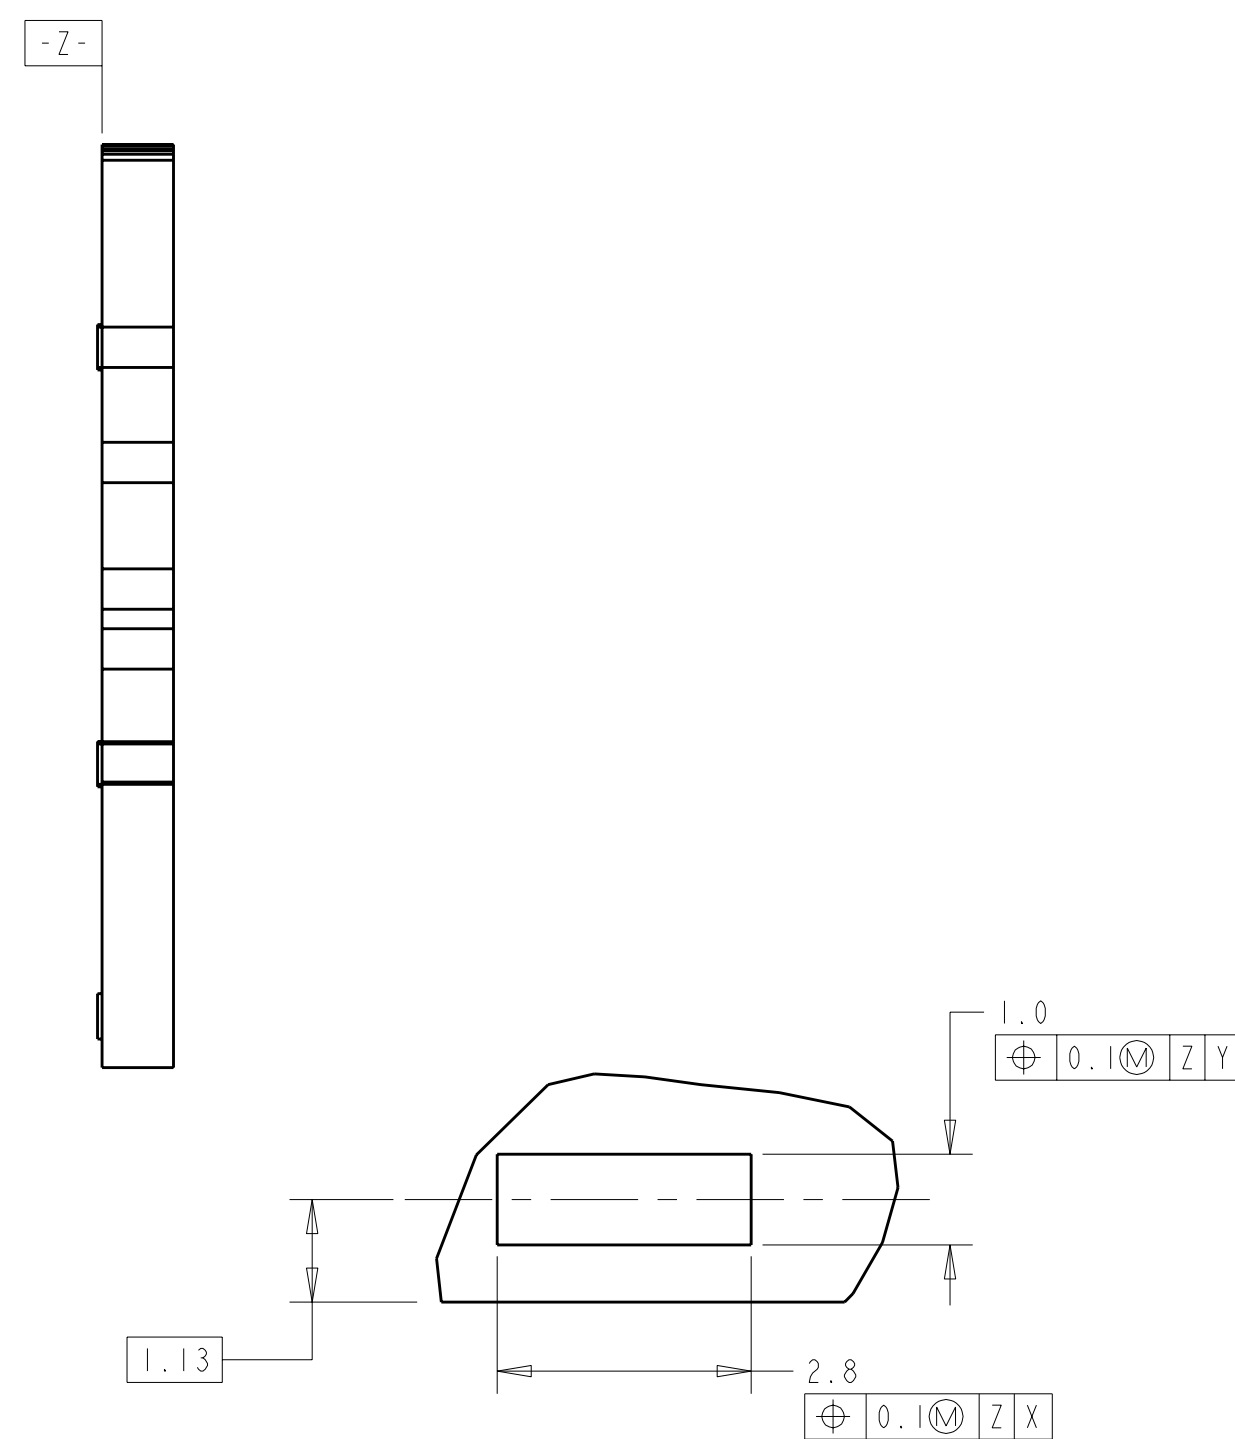

DETAIL B
SCALE 12:1
PLATED PADS REQUIRED FOR
1888652-2 (PRODUCT WITH
GROUNDING CLIPS)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 160CT2006 L.A. MAYER CHK 160CT2006 WESTMAN		 TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: APVD 160CT2006 S. FLICKINGER PRODUCT SPEC 108-1854 APPLICATION SPEC 114-2160		NAME STACKED MOD JACK ASSEMBLY, 2 X 1, 2 POSN, RJ45, SHIELDED, PANEL GROUND, OFFSET, CAT 5	
MATERIAL SEE NOTE 1		FINISH -		WEIGHT -	
		CUSTOMER DRAWING		SIZE CAGE CODE DRAWING NO A1 100779 C=1888652	
				SCALE 4:1 SHEET 2 of 2 REV C	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru