

## Type CPF Series

### Key Features

- Thin film precision resistors with TC's of 15ppm, 25ppm and 50ppm and tolerances to 0.1%. Applications in measurement, telemetry and for sensing circuits.
- Wide range of case sizes from 0201 to 2512
- CPF chip resistors are suitable for all applications where close accuracy and stability are essential
- Terminal finish - electro-plated 100% matte Sn



### Applications

- Communications
- Industrial Controls
- Instrumentation
- Medical

The CPF series is a high stability precision chip resistor range offering various power dissipations relating to a wide range of chip sizes. The CPF series offers TCR's down to 15ppm/°C and resistance tolerances to 0.1%. Standard values are within the IEC 63 E96 and E24 value grids. The CPF has accurate and uniform physical dimensions to facilitate placement.

### Characteristics - Electrical

|                                | 0201          |      |      |      | 0402          |      |      |      |      |      |      |      |      |      |
|--------------------------------|---------------|------|------|------|---------------|------|------|------|------|------|------|------|------|------|
| Rated Power @ 70°C:            | 0.03125W      |      |      |      | 0.063W        |      |      |      |      |      |      |      |      |      |
| Resistance Range (Ohms)        | Min:          | 49R9 | 49R9 | 49R9 | 49R9          | 49R9 | 10R  | 10R  | 49R9 | 10R  | 1R0  | 49R9 | 10R  | 1R0  |
|                                | Max:          | 5K0  | 33K  | 5K0  | 33K           | 70K  | 255K | 205K | 70K  | 255K | 205K | 70K  | 255K | 205K |
| Tolerance (%):                 | 0.5           |      | 1    |      | 0.1           |      |      | 0.5  |      |      | 1    |      |      |      |
| Code letter:                   | D             |      | F    |      | B             |      |      | D    |      |      | F    |      |      |      |
| Selection Series:              | E24 & E96     |      |      |      | E24 & E96     |      |      |      |      |      |      |      |      |      |
| Temp. Coefficient (ppm/°C):    | 25            | 50   | 25   | 50   | 15            | 25   | 50   | 15   | 25   | 50   | 15   | 25   | 50   |      |
| Code Letter:                   | E             | C    | E    | C    | D             | E    | C    | D    | E    | C    | D    | E    | C    |      |
| Limiting Element Voltage:      | 15V           |      |      |      | 25V           |      |      |      |      |      |      |      |      |      |
| Max. Overload Voltage:         | 30V           |      |      |      | 50V           |      |      |      |      |      |      |      |      |      |
| Operating Temp. Range:         | -55 to +155°C |      |      |      | -55 to +155°C |      |      |      |      |      |      |      |      |      |
| Climatic Category (°C):        | 55/125/55     |      |      |      | 55/125/55     |      |      |      |      |      |      |      |      |      |
| Insulation Resistance Dry Min: | 1000MΩ        |      |      |      | 1000MΩ        |      |      |      |      |      |      |      |      |      |
| Stability:                     | 0.5%          |      |      |      | 0.5%          |      |      |      |      |      |      |      |      |      |

|                                        | 0603          |     |      |     |      |     |      |     | 0805          |     |      |     |    |    |    |  |
|----------------------------------------|---------------|-----|------|-----|------|-----|------|-----|---------------|-----|------|-----|----|----|----|--|
| Rated Power @ 70°C:                    | 0.063W        |     |      |     |      |     |      |     | 0.1W          |     |      |     |    |    |    |  |
| Resistance Range (Ohms)   Min:<br>Max: | 4R7           | 4R7 | 4R7  | 2R0 | 4R7  | 2R0 | 4R3  | 4R7 | 4R3           | 1R0 | 4R3  | 1R0 |    |    |    |  |
|                                        | 332K          | 1M0 | 332K | 1M0 | 332K | 1M0 | 511K | 2M0 | 511K          | 2M0 | 511K | 2M0 |    |    |    |  |
| Tolerance (%):                         | 0.1           |     | 0.5  |     | 1    |     | 0.1  |     | 0.5           |     | 1    |     |    |    |    |  |
| Code letter:                           | B             |     | D    |     | F    |     | B    |     | D             |     | F    |     |    |    |    |  |
| Selection Series:                      | E24 & E96     |     |      |     |      |     |      |     | E24 & E96     |     |      |     |    |    |    |  |
| Temp. Coefficient (ppm/°C):            | 15            | 25  | 50   | 15  | 25   | 50  | 15   | 25  | 50            | 15  | 25   | 50  | 15 | 25 | 50 |  |
| Code Letter:                           | D             | E   | C    | D   | E    | C   | D    | E   | C             | D   | E    | C   | D  | E  | C  |  |
| Limiting Element Voltage:              | 50V           |     |      |     |      |     |      |     | 100V          |     |      |     |    |    |    |  |
| Max. Overload Voltage:                 | 100V          |     |      |     |      |     |      |     | 200V          |     |      |     |    |    |    |  |
| Operating Temp. Range:                 | -55 to +155°C |     |      |     |      |     |      |     | -55 to +155°C |     |      |     |    |    |    |  |
| Climatic Category (°C):                | 55/125/55     |     |      |     |      |     |      |     | 55/125/55     |     |      |     |    |    |    |  |
| Insulation Resistance Dry Min:         | 1000MΩ        |     |      |     |      |     |      |     | 1000MΩ        |     |      |     |    |    |    |  |
| Stability:                             | 0.5%          |     |      |     |      |     |      |     | 0.5%          |     |      |     |    |    |    |  |

## Type CPF Series

|                                      | 1206          |     |     |     |     |     |     |     |     | 1210          |     |     |    |    |    |  |  |
|--------------------------------------|---------------|-----|-----|-----|-----|-----|-----|-----|-----|---------------|-----|-----|----|----|----|--|--|
| Rated Power @ 70°C:                  | 0.125W        |     |     |     |     |     |     |     |     | 0.2W          |     |     |    |    |    |  |  |
| Resistance Range (Ohms) Min:<br>Max: | 4R7           | 4R7 | 4R7 | 1R0 | 4R7 | 1R0 | 4R7 | 4R7 | 4R7 | 1R0           | 4R7 | 1R0 |    |    |    |  |  |
|                                      | 1M0           | 2M5 | 1M0 | 2M5 | 1M0 | 2M5 | 1M0 | 2M5 | 1M0 | 2M5           | 1M0 | 2M5 |    |    |    |  |  |
| Tolerance (%):                       | 0.1           |     | 0.5 |     | 1   |     | 0.1 |     | 0.5 |               | 1   |     |    |    |    |  |  |
| Code letter:                         | B             |     | D   |     | F   |     | B   |     | D   |               | F   |     |    |    |    |  |  |
| Selection Series:                    | E24 & E96     |     |     |     |     |     |     |     |     | E24 & E96     |     |     |    |    |    |  |  |
| Temp. Coefficient (ppm/°C):          | 15            | 25  | 50  | 15  | 25  | 50  | 15  | 25  | 50  | 15            | 25  | 50  | 15 | 25 | 50 |  |  |
| Code Letter:                         | D             | E   | C   | D   | E   | C   | D   | E   | C   | D             | E   | C   | D  | E  | C  |  |  |
| Limiting Element Voltage:            | 150V          |     |     |     |     |     |     |     |     | 150V          |     |     |    |    |    |  |  |
| Max. Overload Voltage:               | 300V          |     |     |     |     |     |     |     |     | 300V          |     |     |    |    |    |  |  |
| Operating Temp. Range:               | -55 to +155°C |     |     |     |     |     |     |     |     | -55 to +155°C |     |     |    |    |    |  |  |
| Climatic Category (°C):              | 55/125/55     |     |     |     |     |     |     |     |     | 55/125/55     |     |     |    |    |    |  |  |
| Insulation Resistance Dry Min:       | 1000MΩ        |     |     |     |     |     |     |     |     | 1000MΩ        |     |     |    |    |    |  |  |
| Stability:                           | 0.5%          |     |     |     |     |     |     |     |     | 0.5%          |     |     |    |    |    |  |  |

|                                | 2010          |     |     |     |     |     |     |     |     | 2512          |     |     |     |    |    |    |    |    |
|--------------------------------|---------------|-----|-----|-----|-----|-----|-----|-----|-----|---------------|-----|-----|-----|----|----|----|----|----|
| Rated Power @ 70°C:            | 0.25W         |     |     |     |     |     |     |     |     | 0.5W          |     |     |     |    |    |    |    |    |
| Resistance Range (Ohms) Min:   | 4R7           | 4R7 | 4R7 | 1R0 | 4R7 | 1R0 | 4R7 | 4R7 | 4R7 | 1R0           | 4R7 | 1R0 |     |    |    |    |    |    |
|                                | Max:          | 1M0 | 3M0 | 1M0 | 3M0 | 1M0 | 3M0 | 1M0 | 3M0 | 1M0           | 3M0 | 1M0 | 3M0 |    |    |    |    |    |
| Tolerance (%):                 | 0.1           |     |     | 0.5 |     |     | 1   |     |     | 0.1           |     |     | 0.5 |    |    | 1  |    |    |
| Code letter:                   | B             |     |     | D   |     |     | F   |     |     | B             |     |     | D   |    |    | F  |    |    |
| Selection Series:              | E24 & E96     |     |     |     |     |     |     |     |     | E24 & E96     |     |     |     |    |    |    |    |    |
| Temp. Coefficient (ppm/°C):    | 15            | 25  | 50  | 15  | 25  | 50  | 15  | 25  | 50  | 15            | 25  | 50  | 15  | 25 | 50 | 15 | 25 | 50 |
| Code Letter:                   | D             | E   | C   | D   | E   | C   | D   | E   | C   | D             | E   | C   | D   | E  | C  | D  | E  | C  |
| Limiting Element Voltage:      | 150V          |     |     |     |     |     |     |     |     | 150V          |     |     |     |    |    |    |    |    |
| Max. Overload Voltage:         | 300V          |     |     |     |     |     |     |     |     | 300V          |     |     |     |    |    |    |    |    |
| Operating Temp. Range:         | -55 to +155°C |     |     |     |     |     |     |     |     | -55 to +155°C |     |     |     |    |    |    |    |    |
| Climatic Category (°C):        | 55/125/55     |     |     |     |     |     |     |     |     | 55/125/55     |     |     |     |    |    |    |    |    |
| Insulation Resistance Dry Min: | 1000MΩ        |     |     |     |     |     |     |     |     | 1000MΩ        |     |     |     |    |    |    |    |    |
| Stability:                     | 0.5%          |     |     |     |     |     |     |     |     | 0.5%          |     |     |     |    |    |    |    |    |

## Characteristics - Environmental

| Item                                         | Requirement                                          |              | Test Method                                                                       |
|----------------------------------------------|------------------------------------------------------|--------------|-----------------------------------------------------------------------------------|
|                                              | Tol. ≤ 0.05%                                         | Tol. > 0.05% |                                                                                   |
| Temperature Coefficient of Resistance (TCR): | AS per TCRs specified in value range table on page 1 |              | +25/-55/+25/+125/+25°C                                                            |
| Short Time Overload:                         | ΔR ±0.05%                                            | ΔR ±0.2%     | RCWV* 2.5 or max. overload voltage for 5 seconds                                  |
| Insulation Resistance:                       | ΔR ±0.2% for high power rating<br>>1000MΩ            |              | Apply 100VDC for 1 minute                                                         |
| Endurance:                                   | ΔR ±0.05%                                            | ΔR ±0.2%     | 70 ±2°C, max. working voltage for 1000hrs with 1.5hrs “ON” and 0.5 hrs “OFF”      |
|                                              | >7kΩ ΔR ±0.5%                                        |              |                                                                                   |
|                                              | ΔR ±0.5% for high power rating                       |              |                                                                                   |
| Damp Heat with Load:                         | ΔR ±0.05%                                            | ΔR ±0.3%     | 40 ±2°C, 90 - 95% R.H. max. working voltage hrs with 1.5hrs “ON” and 0.5hrs “OFF” |
|                                              | ΔR ±0.5% for high power rating                       |              |                                                                                   |
| Bending Strength:                            | ΔR ±0.05%                                            | ΔR ±0.2%     | Bending amplitude 3mm for 10 seconds                                              |
| Solderability:                               | 95% min. coverage                                    |              | 245 ±5°C for 3 seconds                                                            |
| Resistance to Soldering Heat:                | ΔR ±0.05%                                            | ΔR ±0.2%     | 260 ±5°C for 10 seconds                                                           |
| Dielectric Withstand Voltage:                | By Type                                              |              | Max. overload voltage for 1 minute                                                |
| Thermal Shock:                               | ΔR ±0.05%                                            | ΔR ±0.25%    | -55°C to +150°C, 100 cycles                                                       |
| Low Temperature Operation:                   | ΔR ±0.05%                                            | ΔR ±0.2%     | 1 hour, -65°C, followed by 45 minutes of RCWV                                     |
|                                              | ΔR ±0.5% for high power rating                       |              |                                                                                   |

Reference Standards: MIL-STD-202, JIS-C 5201-1

Storage Temperature: 25±3°C; Humidity &lt; 80%RH

## Type CPF Series

### Marking Codes - Case Sizes 0805 to 2512

#### IEC 4 Digit Marking

|               |      |       |      |        |       |
|---------------|------|-------|------|--------|-------|
| Resistance:   | 100Ω | 2.2KΩ | 10KΩ | 49.9KΩ | 100KΩ |
| Marking Code: | 1000 | 2201  | 1002 | 4992   | 1003  |

### Case Sizes 0603

#### E24 3 Digit Marking - Example: 101=100Ω 102=1KΩ

|     |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|----|----|----|----|----|----|----|----|----|----|----|----|
| E24 | 10 | 11 | 12 | 13 | 15 | 16 | 18 | 20 | 22 | 24 | 27 | 30 |
|     | 33 | 36 | 39 | 43 | 47 | 51 | 56 | 62 | 68 | 75 | 82 | 91 |

#### E96 3 Digit Marking - Examples: 14C=13K7Ω, 13C=13K3Ω, 68B=4K99Ω, 68X=49.9Ω



#### 0603 E96 Marking Code Table

| Code       | E96             |                 | Code            | E96             |                 | Code            | E96             |                 | Code             | E96              |                  |
|------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|------------------|------------------|------------------|
| 01         | 100             |                 | 25              | 178             |                 | 49              | 316             |                 | 73               | 562              |                  |
| 02         | 102             |                 | 26              | 182             |                 | 50              | 324             |                 | 74               | 576              |                  |
| 03         | 105             |                 | 27              | 187             |                 | 51              | 332             |                 | 75               | 590              |                  |
| 04         | 107             |                 | 28              | 191             |                 | 52              | 340             |                 | 76               | 604              |                  |
| 05         | 110             |                 | 29              | 196             |                 | 53              | 348             |                 | 77               | 619              |                  |
| 06         | 113             |                 | 30              | 200             |                 | 54              | 357             |                 | 78               | 634              |                  |
| 07         | 115             |                 | 31              | 205             |                 | 55              | 365             |                 | 79               | 649              |                  |
| 08         | 118             |                 | 32              | 210             |                 | 56              | 374             |                 | 80               | 665              |                  |
| 09         | 121             |                 | 33              | 215             |                 | 57              | 383             |                 | 81               | 681              |                  |
| 10         | 124             |                 | 34              | 221             |                 | 58              | 392             |                 | 82               | 698              |                  |
| 11         | 127             |                 | 35              | 226             |                 | 59              | 402             |                 | 83               | 715              |                  |
| 12         | 130             |                 | 36              | 232             |                 | 60              | 412             |                 | 84               | 732              |                  |
| 13         | 133             |                 | 37              | 237             |                 | 61              | 422             |                 | 85               | 750              |                  |
| 14         | 137             |                 | 38              | 243             |                 | 62              | 432             |                 | 86               | 768              |                  |
| 15         | 140             |                 | 39              | 249             |                 | 63              | 442             |                 | 87               | 787              |                  |
| 16         | 143             |                 | 40              | 255             |                 | 64              | 453             |                 | 88               | 806              |                  |
| 17         | 147             |                 | 41              | 261             |                 | 65              | 464             |                 | 89               | 825              |                  |
| 18         | 150             |                 | 42              | 267             |                 | 66              | 475             |                 | 90               | 845              |                  |
| 19         | 154             |                 | 43              | 274             |                 | 67              | 487             |                 | 91               | 866              |                  |
| 20         | 158             |                 | 44              | 280             |                 | 68              | 499             |                 | 92               | 887              |                  |
| 21         | 162             |                 | 45              | 287             |                 | 69              | 511             |                 | 93               | 909              |                  |
| 22         | 165             |                 | 46              | 294             |                 | 70              | 523             |                 | 94               | 931              |                  |
| 23         | 169             |                 | 47              | 301             |                 | 71              | 536             |                 | 95               | 953              |                  |
| 24         | 174             |                 | 48              | 309             |                 | 72              | 549             |                 | 96               | 976              |                  |
| Code       | A               | B               | C               | D               | E               | F               | G               | H               | X                | Y                | Z                |
| Multiplier | 10 <sup>0</sup> | 10 <sup>1</sup> | 10 <sup>2</sup> | 10 <sup>3</sup> | 10 <sup>4</sup> | 10 <sup>5</sup> | 10 <sup>6</sup> | 10 <sup>7</sup> | 10 <sup>-1</sup> | 10 <sup>-2</sup> | 10 <sup>-3</sup> |


## Type CPF Series

### Power Derating Curve



For resistors operated in ambient temperatures above 70°C, power rating must be derated in accordance with this curve.

### Dimensions

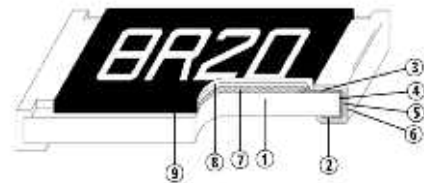

- |                          |                            |                          |
|--------------------------|----------------------------|--------------------------|
| 1. Alumina Substrate     | 4. Edge Electrode (NiCr)   | 7. Resistor Layer (NiCr) |
| 2. Bottom Electrode (Ag) | 5. Barrier Layer (Ni)      | 8. Overcoat (Epoxy)      |
| 3. Top Electrode (Ag-Pd) | 6. External Electrode (Sn) | 9. Marking               |

| Part Number | L          | W          | H          | a          | b          | Weight (g)<br>1000 pieces |
|-------------|------------|------------|------------|------------|------------|---------------------------|
| CPF0201     | 0.58 ±0.05 | 0.29 ±0.05 | 0.23 ±0.05 | 0.12 ±0.05 | 0.15 ±0.05 | 0.14                      |
| CPF0402     | 1.00 ±0.05 | 0.50 ±0.05 | 0.30 ±0.05 | 0.20 ±0.10 | 0.20 ±0.10 | 0.54                      |
| CPF0603     | 1.55 ±0.10 | 0.80 ±0.10 | 0.45 ±0.10 | 0.30 ±0.20 | 0.30 ±0.20 | 1.83                      |
| CPF0805     | 2.00 ±0.15 | 1.25 ±0.15 | 0.55 ±0.10 | 0.30 ±0.20 | 0.40 ±0.25 | 4.71                      |
| CPF1206     | 3.05 ±0.15 | 1.55 ±0.15 | 0.55 ±0.10 | 0.42 ±0.20 | 0.35 ±0.25 | 9.02                      |
| CPF1210     | 3.10 ±0.15 | 2.40 ±0.15 | 0.55 ±0.10 | 0.40 ±0.20 | 0.55 ±0.25 | 10.00                     |
| CPF2010     | 4.90 ±0.15 | 2.40 ±0.15 | 0.55 ±0.10 | 0.60 ±0.30 | 0.50 ±0.25 | 23.61                     |
| CPF2512     | 6.30 ±0.15 | 3.10 ±0.15 | 0.55 ±0.10 | 0.60 ±0.30 | 0.50 ±0.25 | 38.08                     |

### Recommend Land Pattern



| Type    | A    | B    | C         |
|---------|------|------|-----------|
| CPF0201 | 0.25 | 0.3  | 0.40 ±0.2 |
| CPF0402 | 0.5  | 0.5  | 0.60 ±0.2 |
| CPF0603 | 0.8  | 1.0  | 0.90 ±0.2 |
| CPF0805 | 1.0  | 1.0  | 1.35 ±0.2 |
| CPF1206 | 2.0  | 1.15 | 1.70 ±0.2 |
| CPF1210 | 2.0  | 1.15 | 2.50 ±0.2 |
| CPF2010 | 3.6  | 1.4  | 2.50 ±0.2 |
| CPF2512 | 4.9  | 1.6  | 3.10 ±0.2 |

## Type CPF Series

### Packaging Quantity & Reel Specifications



| Type    | øA         | øB        | øC        | W         | T         | Paper Tape (EA) | Embossed Plastic Tape (EA) |
|---------|------------|-----------|-----------|-----------|-----------|-----------------|----------------------------|
| CPF0201 | 178.0 ±1.0 | 60.0 +1.0 | 13.5 ±0.7 | 9.5 ±1.0  | 11.5 ±1.0 | 1000 / 5000     | -                          |
| CPF0402 | 178.0 ±1.0 | 60.0 +1.0 | 13.5 ±0.7 | 9.5 ±1.0  | 11.5 ±1.0 | 1000 / 5000     | -                          |
| CPF0603 | 178.0 ±1.0 | 60.0 +1.0 | 13.5 ±0.7 | 9.5 ±1.0  | 11.5 ±1.0 | 1000 / 5000     | -                          |
| CPF0805 | 178.0 ±1.0 | 60.0 +1.0 | 13.5 ±0.7 | 9.5 ±1.0  | 11.5 ±1.0 | 1000 / 5000     | -                          |
| CPF1206 | 178.0 ±1.0 | 60.0 +1.0 | 13.5 ±0.7 | 9.5 ±1.0  | 11.5 ±1.0 | 1000 / 5000     | -                          |
| CPF1210 | 178.0 ±1.0 | 60.0 +1.0 | 13.5 ±0.7 | 9.5 ±1.0  | 11.5 ±1.0 | 1000 / 5000     | -                          |
| CPF2010 | 178.0 ±1.0 | 60.0 +1.0 | 13.5 ±0.7 | 13.5 ±1.0 | 15.5 ±1.0 | -               | 4000                       |
| CPF2512 | 178.0 ±1.0 | 60.0 +1.0 | 13.5 ±0.7 | 13.5 ±1.0 | 15.5 ±1.0 | -               | 4000                       |

### Paper Tape Specification



| Type    | A          | B          | W          | E          | F         | P <sub>0</sub> | P <sub>1</sub> | P <sub>2</sub> | øD <sub>0</sub> | T          |
|---------|------------|------------|------------|------------|-----------|----------------|----------------|----------------|-----------------|------------|
| CPF0201 | 0.40 ±0.05 | 0.70 ±0.05 | 8.00 ±0.10 | 1.75 ±0.05 | 3.5 ±0.05 | 4.00 ±0.10     | 2.00 ±0.05     | 2.00 ±0.05     | 1.55 ±0.03      | 0.42 ±0.02 |
| CPF0402 | 0.70 ±0.05 | 1.16 ±0.05 | 8.00 ±0.10 | 1.75 ±0.05 | 3.5 ±0.05 | 4.00 ±0.10     | 2.00 ±0.05     | 2.00 ±0.05     | 1.55 ±0.05      | 0.40 ±0.03 |
| CPF0603 | 1.10 ±0.05 | 1.90 ±0.05 | 8.00 ±0.10 | 1.75 ±0.05 | 3.5 ±0.05 | 4.00 ±0.10     | 4.00 ±0.10     | 2.00 ±0.05     | 1.55 ±0.05      | 0.60 ±0.03 |
| CPF0805 | 1.60 ±0.05 | 2.37 ±0.05 | 8.00 ±0.10 | 1.75 ±0.05 | 3.5 ±0.05 | 4.00 ±0.10     | 4.00 ±0.10     | 2.00 ±0.05     | 1.55 ±0.05      | 0.75 ±0.05 |
| CPF1206 | 2.00 ±0.05 | 3.55 ±0.05 | 8.00 ±0.10 | 1.75 ±0.05 | 3.5 ±0.05 | 4.00 ±0.10     | 4.00 ±0.10     | 2.00 ±0.05     | 1.55 ±0.05      | 0.75 ±0.05 |
| CPF1210 | 2.75 ±0.05 | 3.40 ±0.05 | 8.00 ±0.10 | 1.75 ±0.05 | 3.5 ±0.05 | 4.00 ±0.05     | 4.00 ±0.10     | 2.00 ±0.05     | 1.60 ±0.10      | 0.75 ±0.05 |

## Type CPF Series

### Embossed Plastic Tape Specifications



| Type    | A          | B          | W          | E          | F         | P <sub>0</sub> | P <sub>1</sub> | P <sub>2</sub> | øD <sub>0</sub> | T          |
|---------|------------|------------|------------|------------|-----------|----------------|----------------|----------------|-----------------|------------|
| CPF2010 | 2.85 ±0.10 | 5.45 ±0.10 | 12.0 ±0.10 | 1.75 ±0.10 | 5.5 ±0.05 | 4.00 ±0.05     | 4.00 ±0.10     | 2.00 ±0.05     | 1.50 +0.10      | 1.00 ±0.20 |
| CPF2512 | 3.40 ±0.10 | 6.65 ±0.10 | 12.0 ±0.10 | 1.75 ±0.10 | 5.5 ±0.05 | 4.00 ±0.05     | 4.00 ±0.10     | 2.00 ±0.05     | 1.50 +0.10      | 1.00 ±0.20 |

### How to Order

| CPF                                | 0603                                             | B                                   | 100R                                                      | E                                   | 1                              |
|------------------------------------|--------------------------------------------------|-------------------------------------|-----------------------------------------------------------|-------------------------------------|--------------------------------|
| Common Part                        | Package Size                                     | Tolerance                           | Value                                                     | TCR                                 | Packaging                      |
| CPF - Chip precision film resistor | 0201 1206<br>0402 1210<br>0603 2010<br>0805 2512 | B - ± 0.1%<br>D - ±0.5%<br>F - ± 1% | 100R (100 Ohms)<br>1K0 (1000 Ohms)<br>100K (100,000 Ohms) | D - 15ppm<br>E - 25ppm<br>C - 50ppm | 1 - 1K REEL<br>Blank - 5K REEL |

TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks.

Other logos, product and Company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this datasheet, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this datasheet are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)