



M8 Receptacles

Nickel-plated brass body
IP 68 rating on threaded connection

NEW 5 Pole

	3P	4P	5P
MALE FACE VIEW			
COLOR CODE	1- brown 3- blue 4- black	1- brown 2- white 3- blue 4- black	1- brown 2- white 3- blue 4- black 5- gray
VOLTAGE	60V AC / 75V DC	60V AC / 75V DC	60V AC / 75V DC
CURRENT	4A	4A	3A
CONDUCTOR	#24-3	#24-4	#24-5

MALE ACCEPTS SNAP OR THREADED CORDSETS	FIG	RECEPTACLES WITH 30 CENTIMETER #24 AWG PVC LEADS		
M8 X 0.5 MOUNTING THREADS	1	4R3P06A27C300	4R4P06A27C300	4R5P06A27C300
M8 X 1 MOUNTING THREADS	2	4R3F06A27C300	4R4F06A27C300	—
FEMALE ACCEPTS THREADED CORDSETS ONLY	FIG	RECEPTACLES WITH 30 CENTIMETER #24 AWG PVC LEADS		
M8 X 0.5 MOUNTING THREADS	3	4R3P00A27C300	4R4P00A27C300	4R5P00A27C300

CATALOG OPTIONS

Note: For mating cordsets see pages 168-175
Refer to compatibility matrix for
cordset/receptacle combinations

Use the following chart to modify your part's specifications

4R5P06A27C300

LEAD LENGTH

60 CENTIMETER 600

Specifications

**MECHANICAL**

CONNECTOR FACE: PBT
 SHELL: NICKEL-PLATED BRASS
 O-RING: VITON
 WIRE: PVC; #24 AWG (19X #36)

ELECTRICAL

VOLTAGE RATING: 60V AC / 75V DC
 AMPERAGE:
 3P - 4A
 4P - 4A
 5P - 3A

ENVIRONMENTAL

PROTECTION: NEMA 6P, IP 68 (COUPLER)
 NEMA 4, IP 65 (SNAP)

AMBIENT OPERATING TEMP: -4° TO 221°F (-20° TO 105°C) - PVC

CERTIFICATIONS

UL: UL RECOGNIZED, FILE NO. 152210

RECEPTACLE DIMENSIONS

MALE - M8 X 0.5 MOUNTING THREADS
 (ACCOMMODATES SNAP AND THREADED FEMALE CORDSETS)


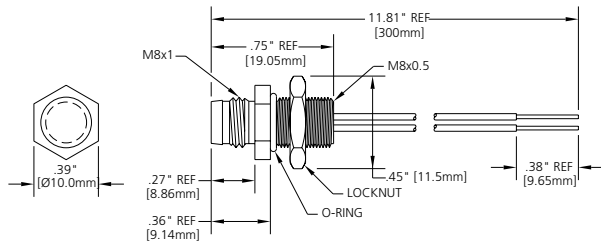


FIG 1

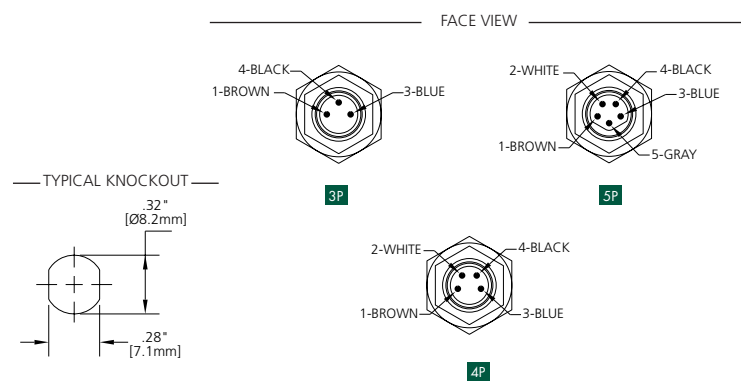

MALE - M8 X 1 MOUNTING THREADS
 (ACCOMMODATES SNAP AND THREADED FEMALE CORDSETS)


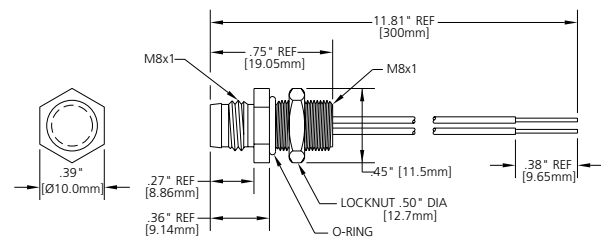


FIG 2

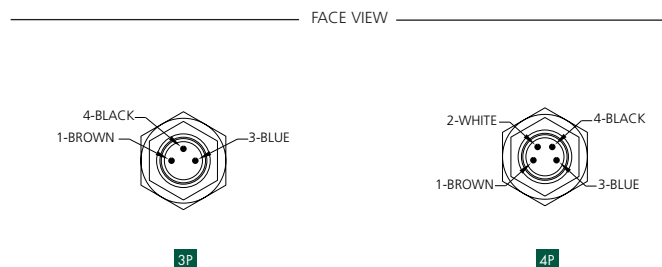

FEMALE - M8 X 0.5 MOUNTING THREADS
 (ACCOMMODATES THREADED MALE CORDSETS ONLY)


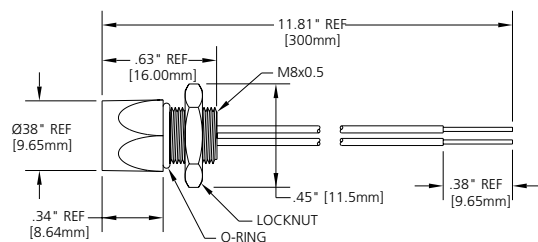


FIG 3

SEE PAGE 168-175
 FOR ADDITIONAL
 RECEPTACLES

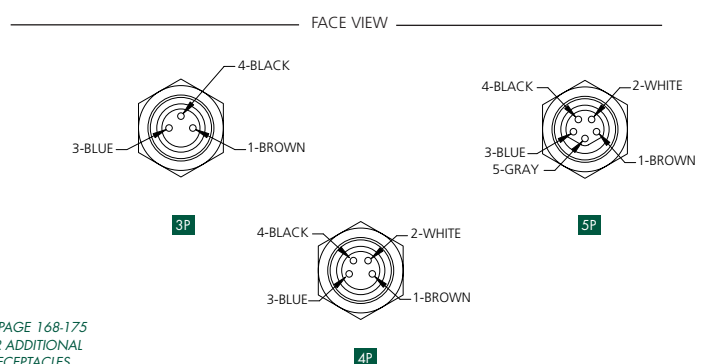

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru