



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		1	INITIAL RELEASE	26FEB2019	JW	SH

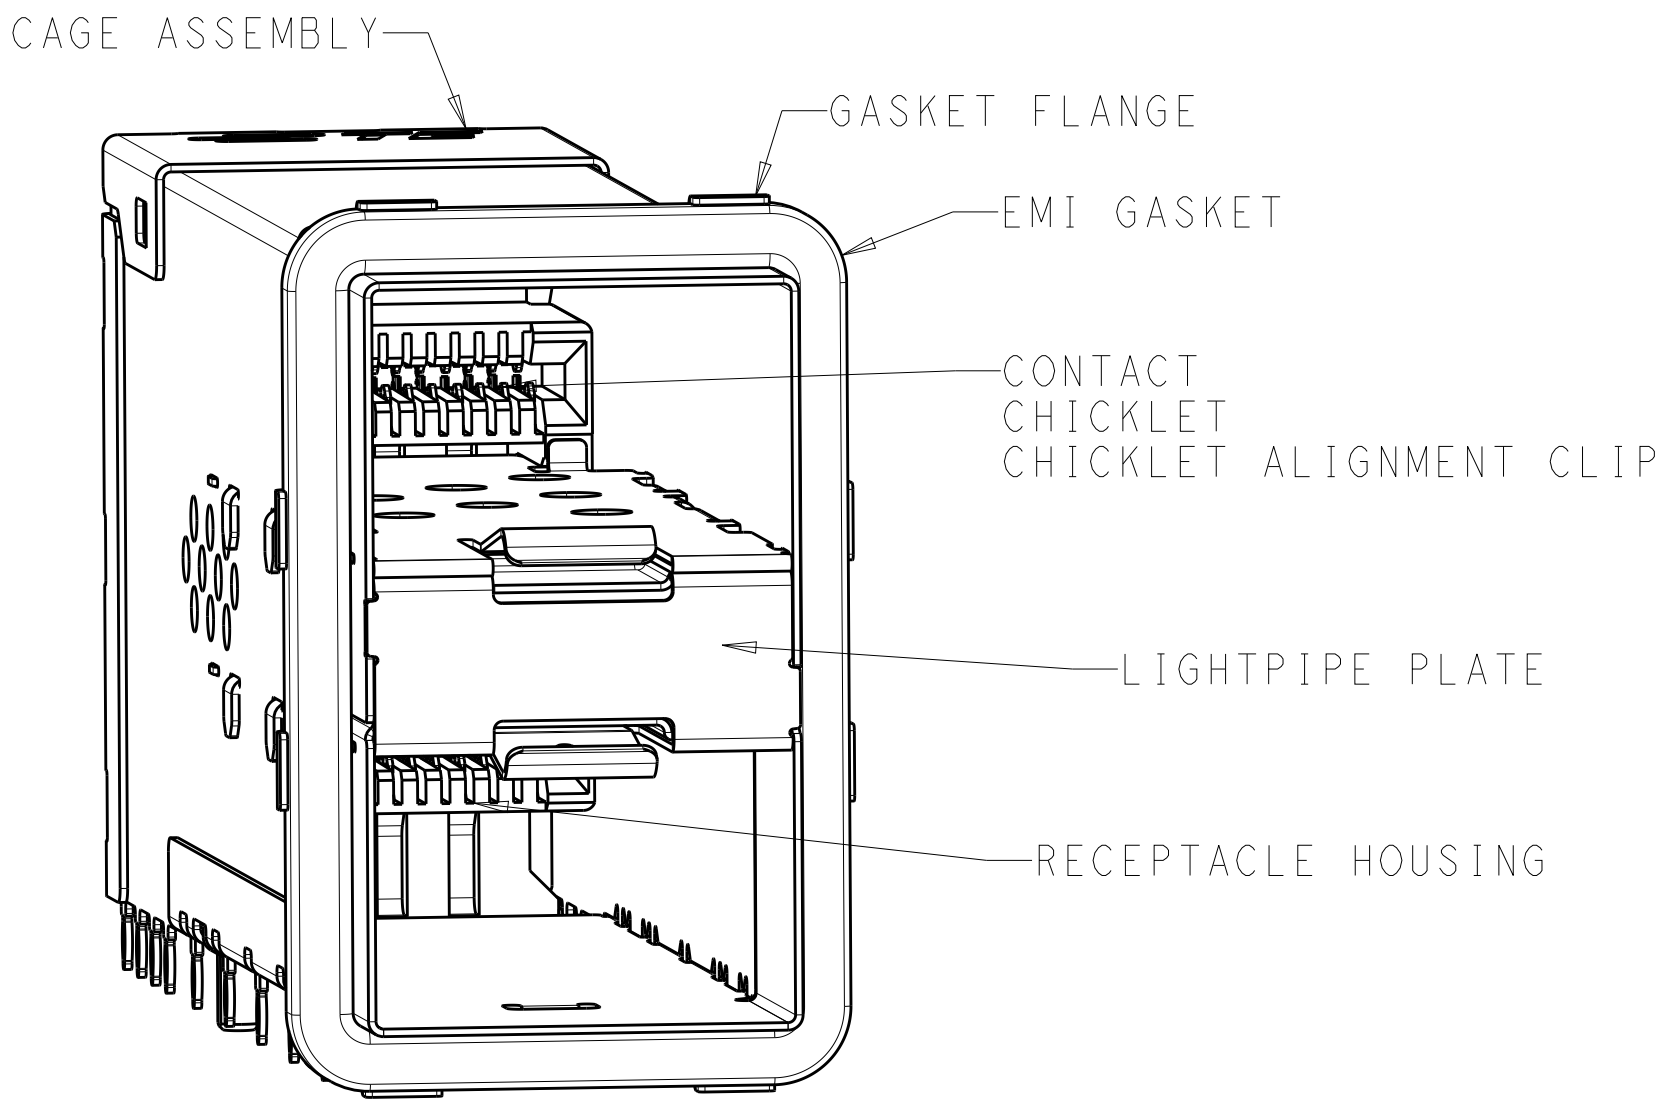

2349202-1
SCALE 4:1

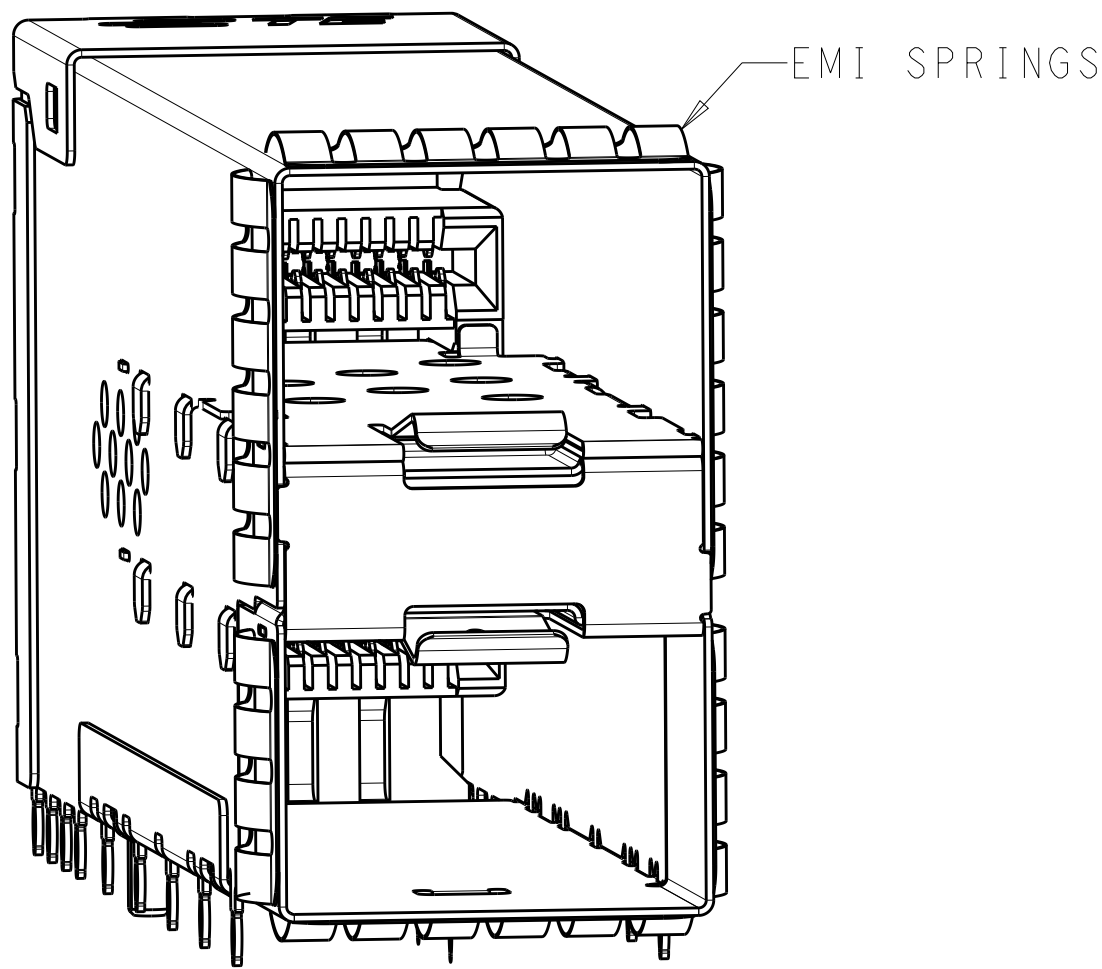

2349202-5
SCALE 4:1

1. MATERIALS:
CAGE ASSEMBLY - NICKEL-SILVER ALLOY PER ASTM B 122
CONNECTOR HOUSING - LCP, BLACK, UL 94V-O RATED
CHICKLET - LCP, BLACK, UL 94V-O RATED
CHICKLET ALIGNMENT CLIP - LCP, BLACK, UL 94V-O RATED
CONTACT - COPPER ALLOY
EMI GASKET - ELASTOMERIC
GASKET FLANGE - STAINLESS STEEL
EMI SPRINGS - PHOSPHOR BRONZE PER ASTM B 103,
0.8µm MIN TIN PER ASTM B 545
LIGHT PIPE - POLYCARBONATE
LIGHT PIPE PLATE- STAINLESS STEEL

2. CONTACT FINISH:
CONFORMS TO THE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2481, BASED ON EIA/ECA-364-1000.01A, (CONTROLLED ENVIRONMENT APPLICATIONS) ON MATING INTERFACE, TIN ON NEEDLE EYE


3. PCB MINIMUM THICKNESS = 1.5mm

4. FOR HOLE SIZE AND PLATINGS,
SEE APPLICATION SPECIFICATION 114-13319


5. LIGHT PIPE PAD LAYOUT IS FOR 0805 LOW PROFILE
LED PACKAGE WITH A HEIGHT OF 0.8mm

6. DIMENSIONS APPLY FOR EMI SPRINGS ONLY


7. THE ENTIRE AREA OF THE CONNECTOR FOOTPRINT, INDICATED BY THE DASHED LINE, TO BE CONSIDERED THE KEEPOUT AREA FOR COMPONENTS AND SIGNAL TRACES, TOP SIDE ONLY, TOP SIDE TRACES ALLOWED WITHIN CONNECTOR HOLE PATTERN

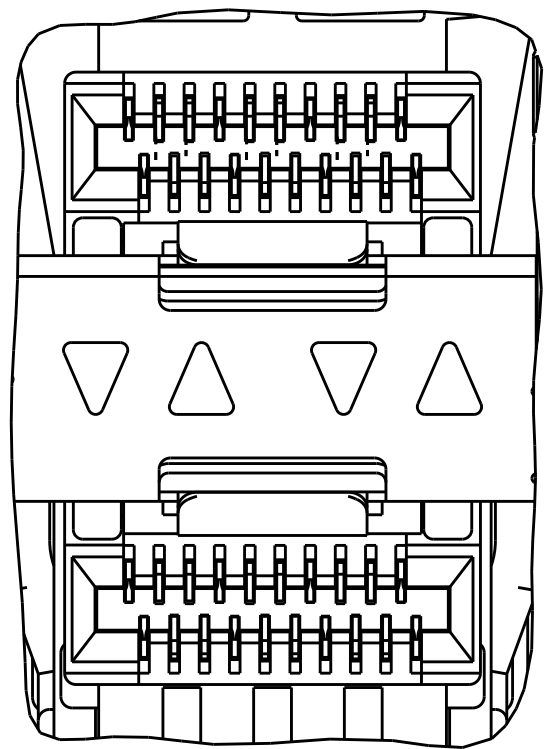


INNER/OUTER LIGHT PIPES
2349202-2, 2349202-6
SCALE 5:1

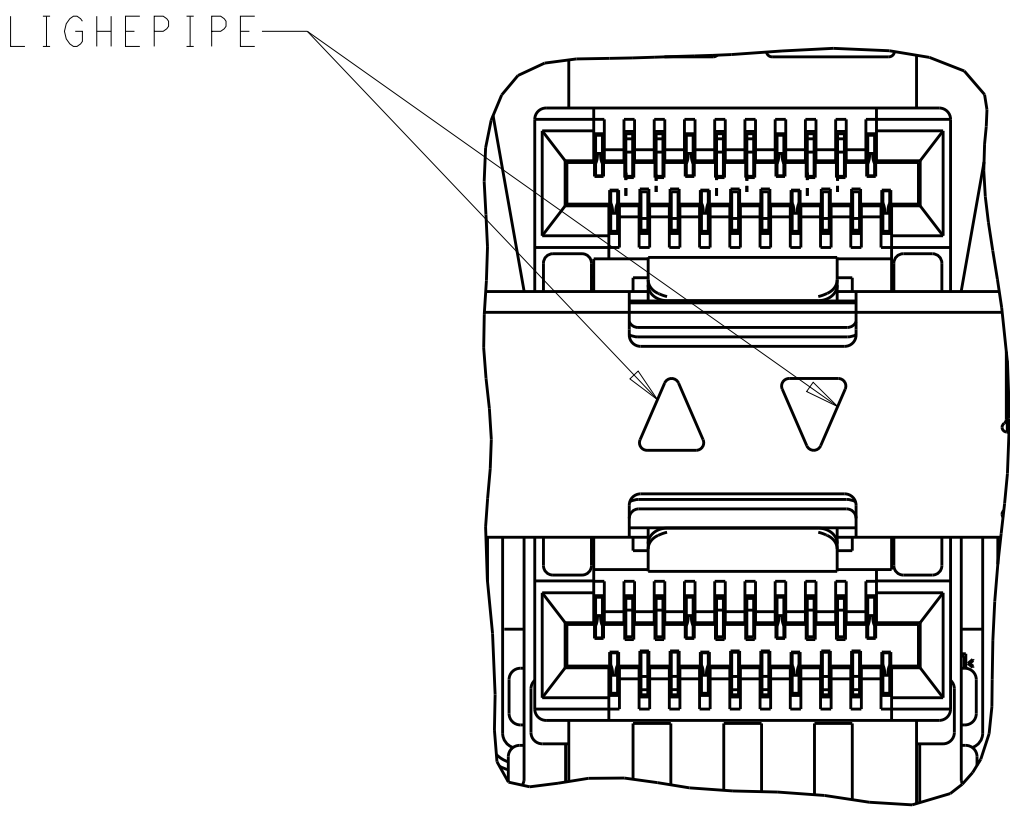


INNER LIGHT PIPES
2349202-3, 2349202-7
SCALE 5:1

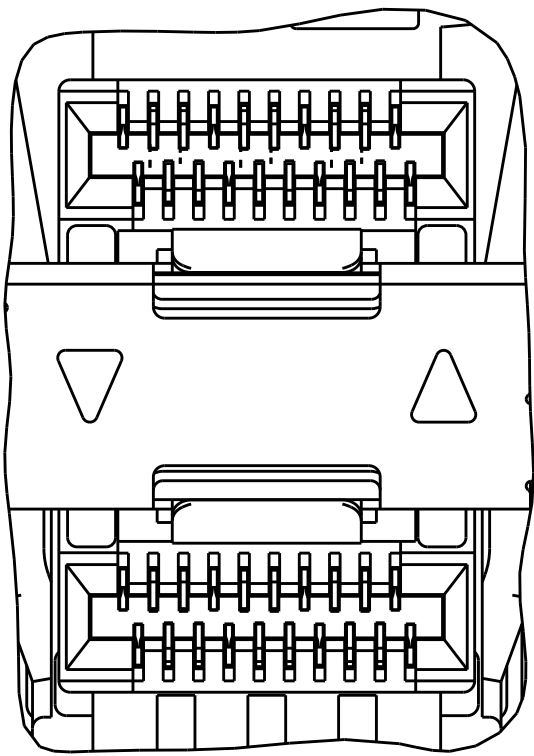

OUTER LIGHT PIPES
2349202-4, 2349202-8
SCALE 5:1

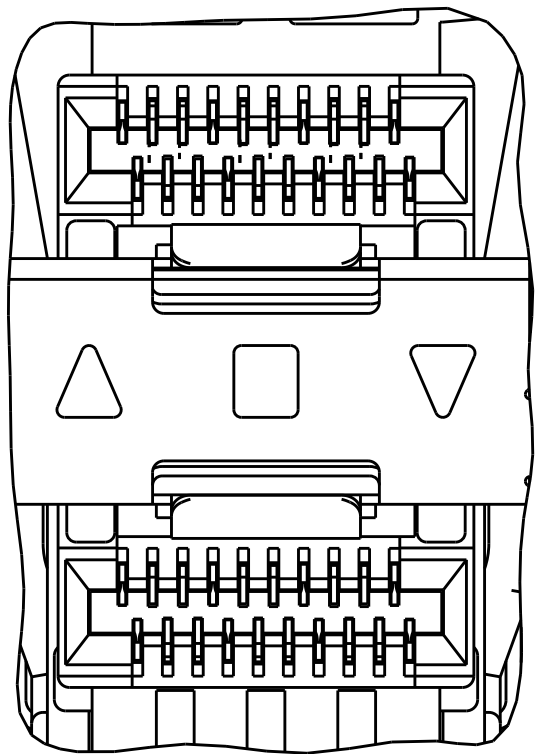

CENTER/REVERSED OUTER LIGHT PIPES
1-2349202-7, 1-2349202-9
SCALE 5:1

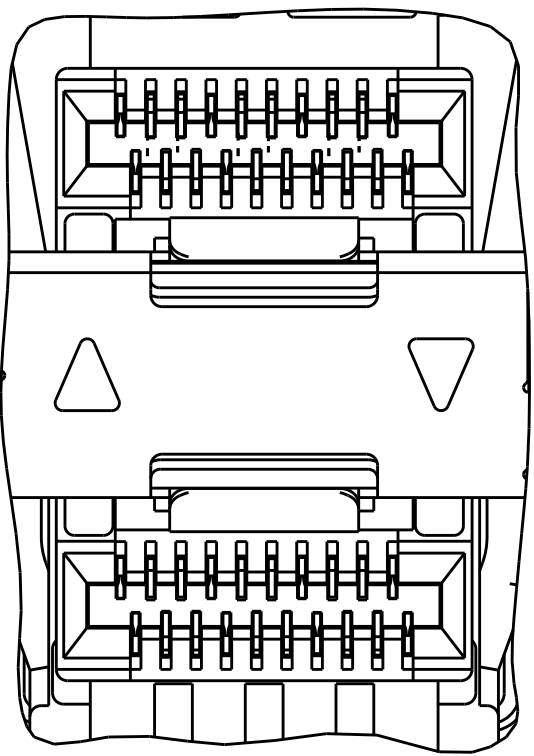

REVERSED OUTER LIGHT PIPES
1-2349202-8, 2-2349202-0
SCALE 5:1

16.75	EMI SPRINGS	REVERSED OUTER	2-2349202-0
		CENTER/REVERSED OUTER	1-2349202-9
19.5	EMI GASKET	REVERSED OUTER	1-2349202-8
		CENTER/REVERSED OUTER	1-2349202-7
16.75	EMI SPRINGS	OUTER	2349202-8
		INNER	2349202-7
		INNER/OUTER	2349202-6
		NONE	2349202-5
19.5	EMI GASKET	OUTER	2349202-4
		INNER	2349202-3
		INNER/OUTER	2349202-2
		NONE	2349202-1
(E)	CAGE TYPE	LIGHT PIPE CONFIGURATION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN J. WANG 26FEB2019		 TE Connectivity	
			CHK S. HAN 26FEB2019			
DIMENSIONS:			TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RECEPTACLE ASSEMBLY, 2X1, STACKED, SFP56	
mm			APVD S. HAN 26FEB2019			
			PRODUCT SPEC		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
			108-2481			
			APPLICATION SPEC			
			114-13319			
			FINISH			
MATERIAL SEE NOTES			WEIGHT -		A100779C=2349202	
			CUSTOMER DRAWING		SCALE 4:1	
					SHEET 1 OF 4	
					REV A	



LOC		DIST		REVISIONS					
GP		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
				-	-	SEE SHEET 1	-	-	-

D

C


B

A


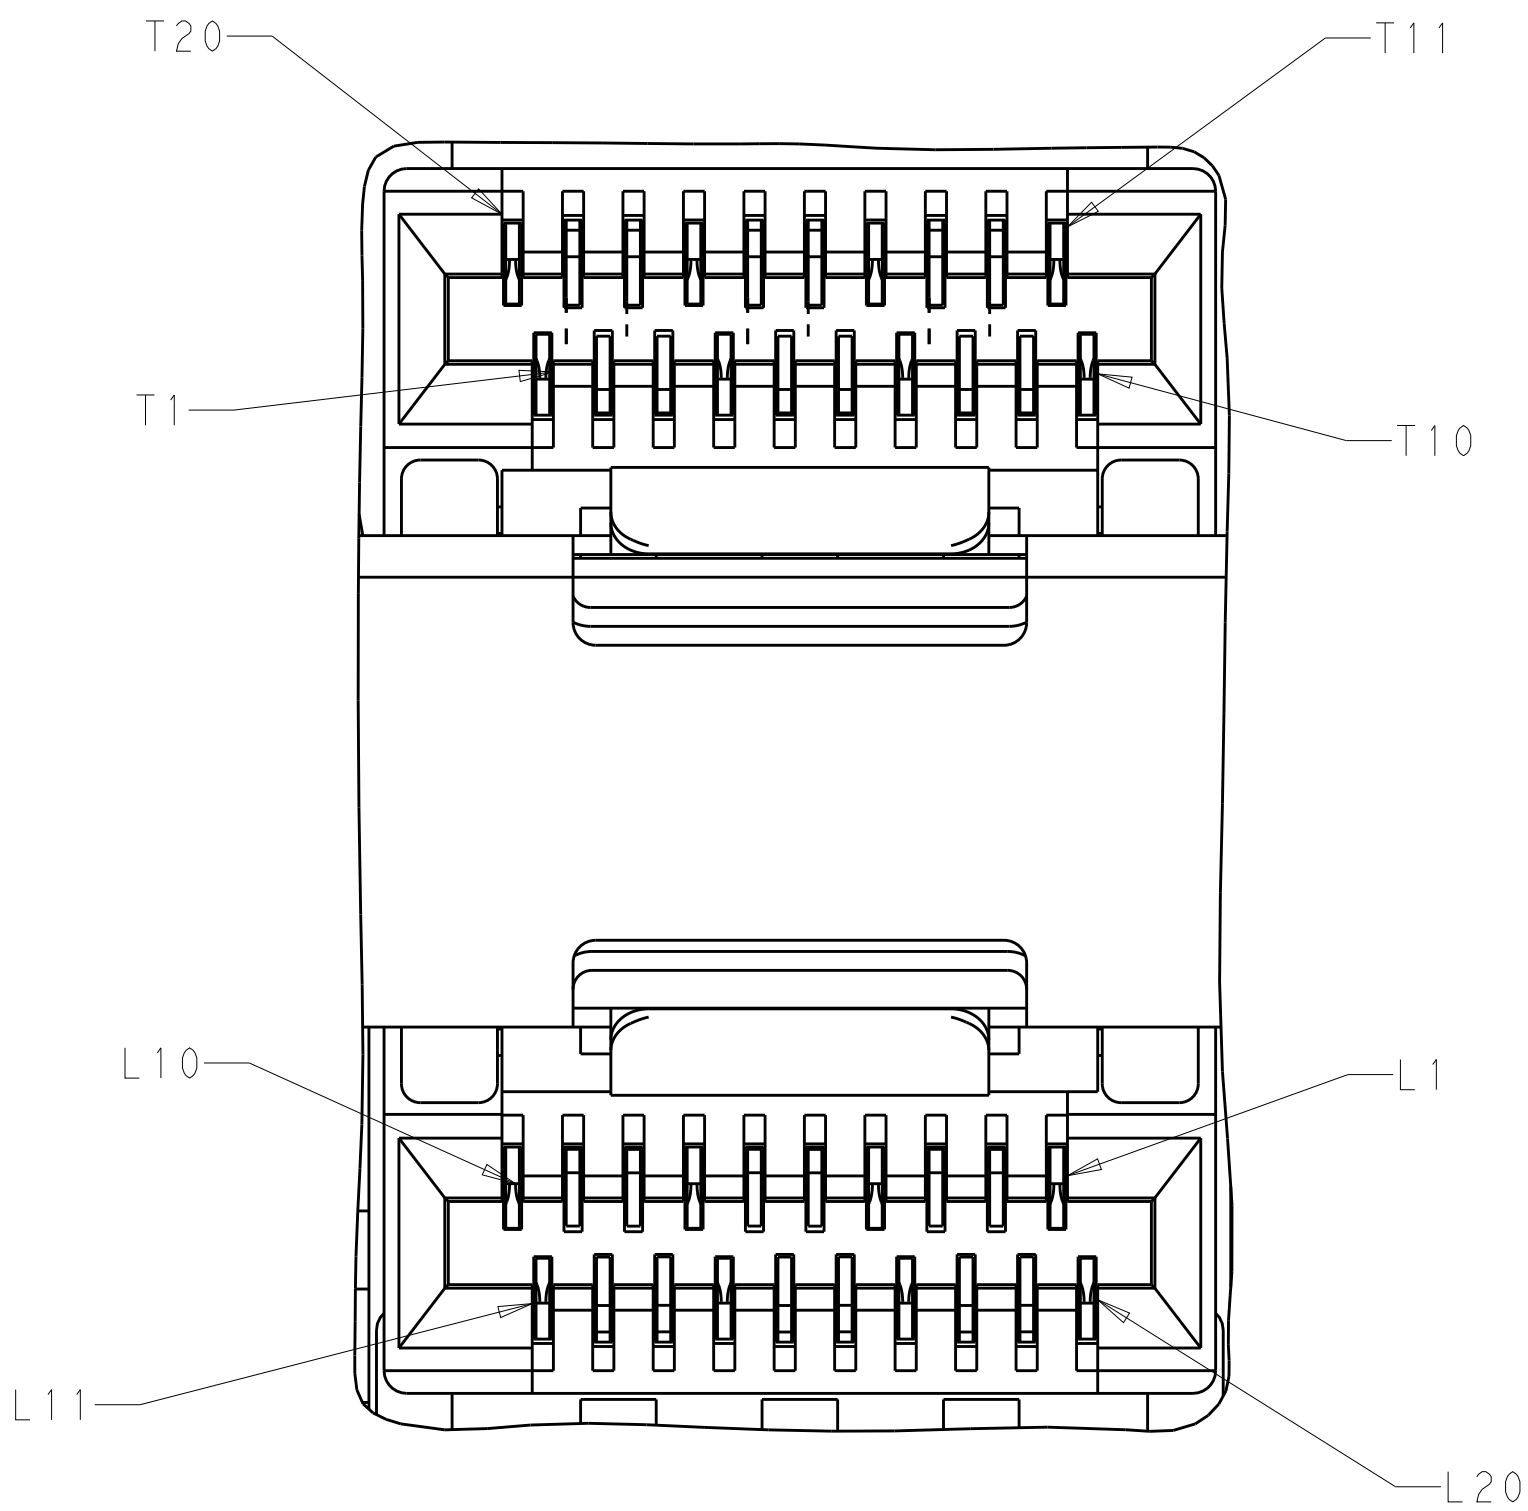
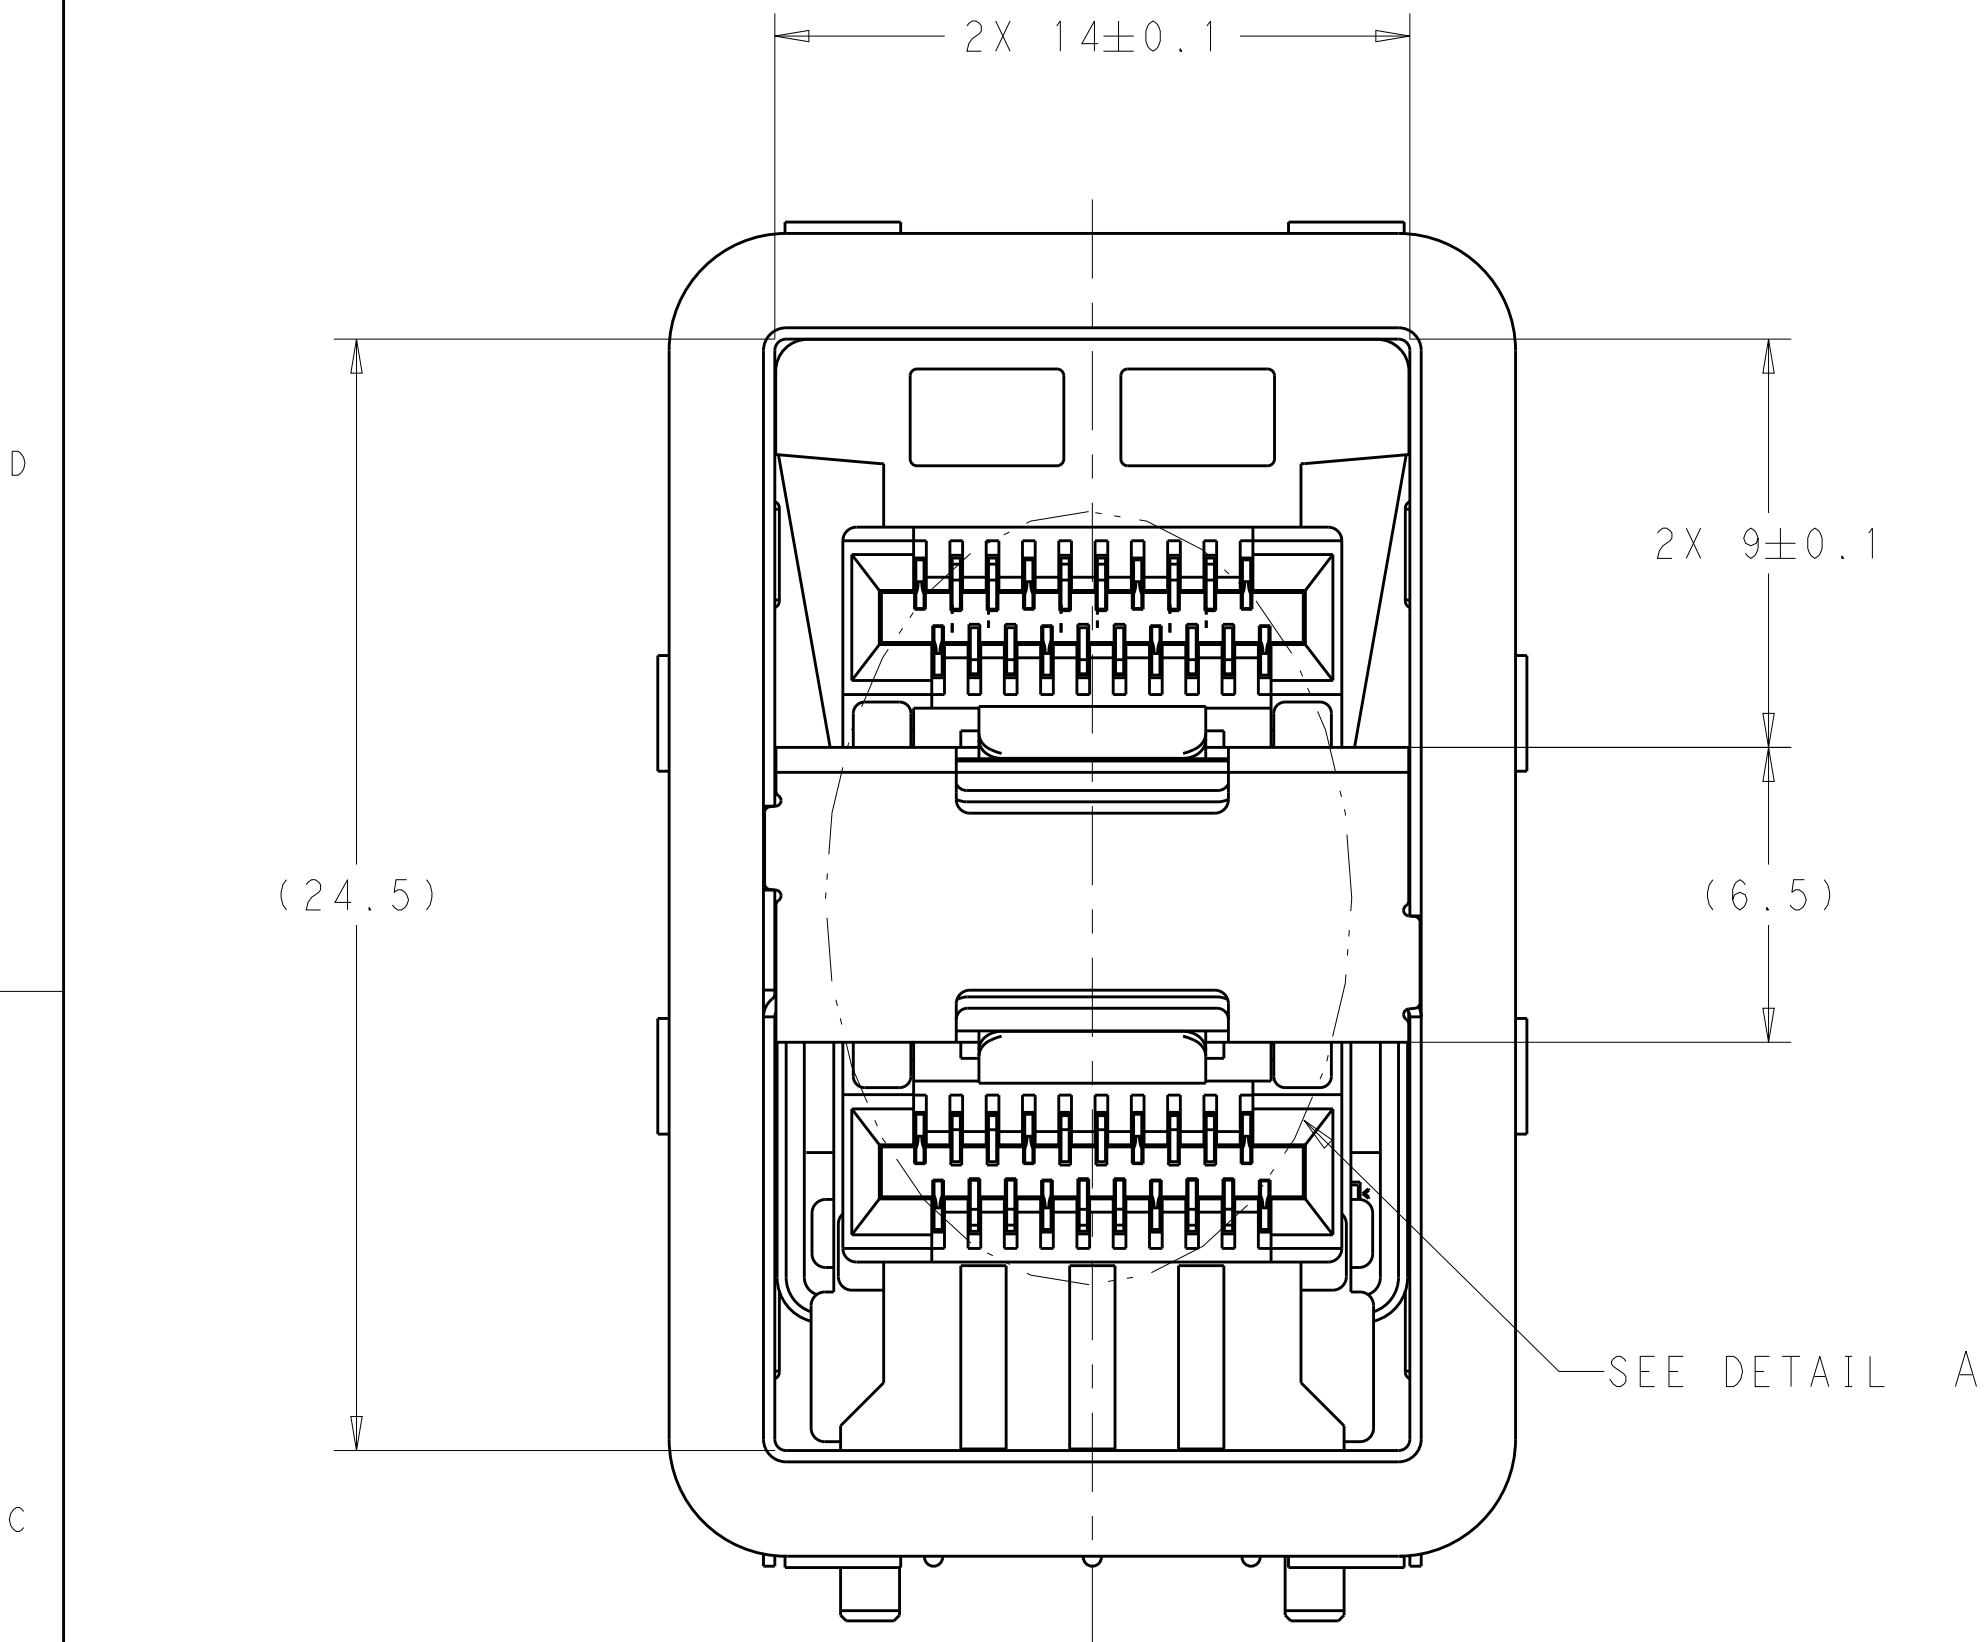


DETAIL A
2 PLACES
SCALE 10:1

2349202-5 THRU 2349202-8, 1-2349202-9, 2-2349202-0
EMI SPRINGS ONLY
SCALE 3:1

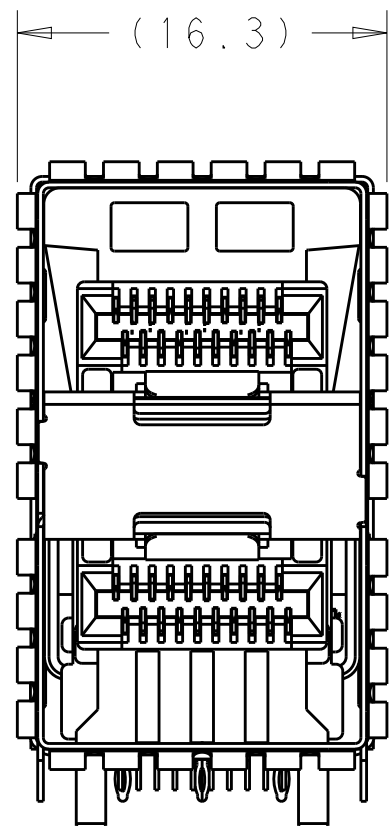


2349202-5 THRU 2349202-8, 1-2349202-9, 2-2349202-0
EMI SPRINGS ONLY
SCALE 3:1

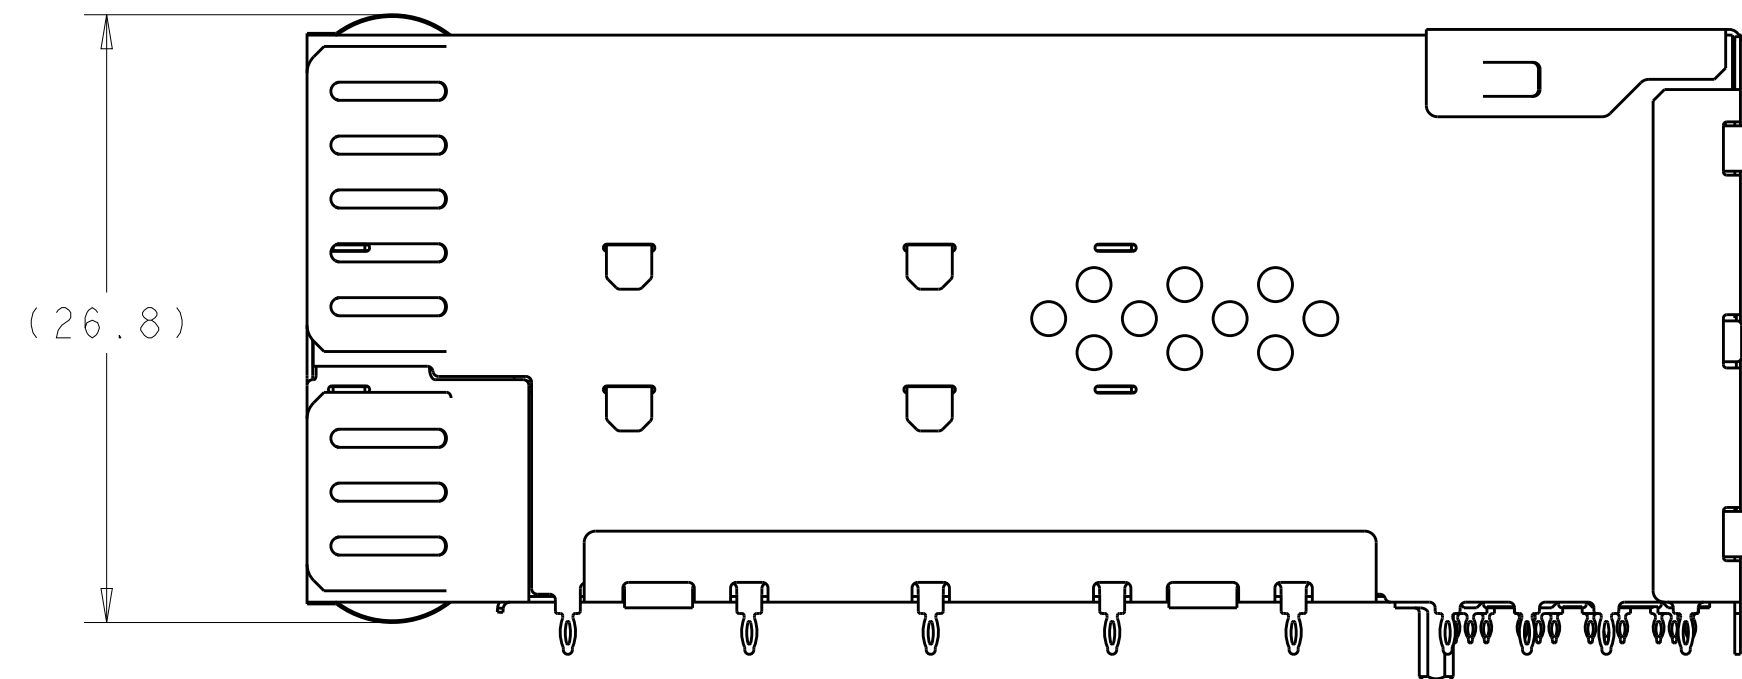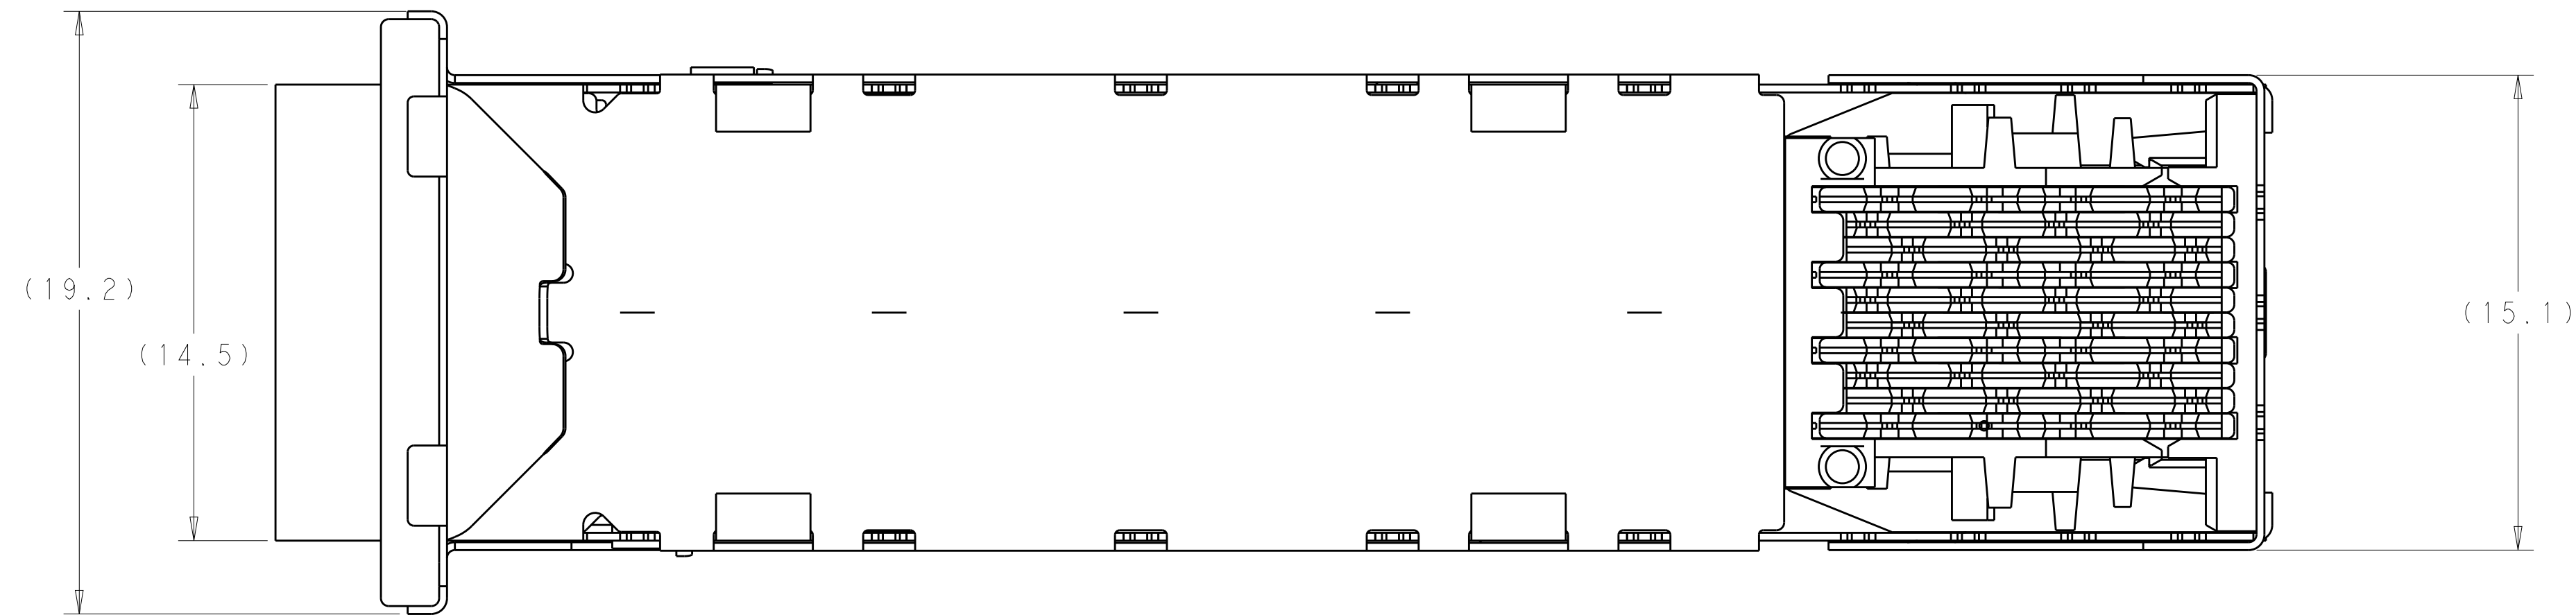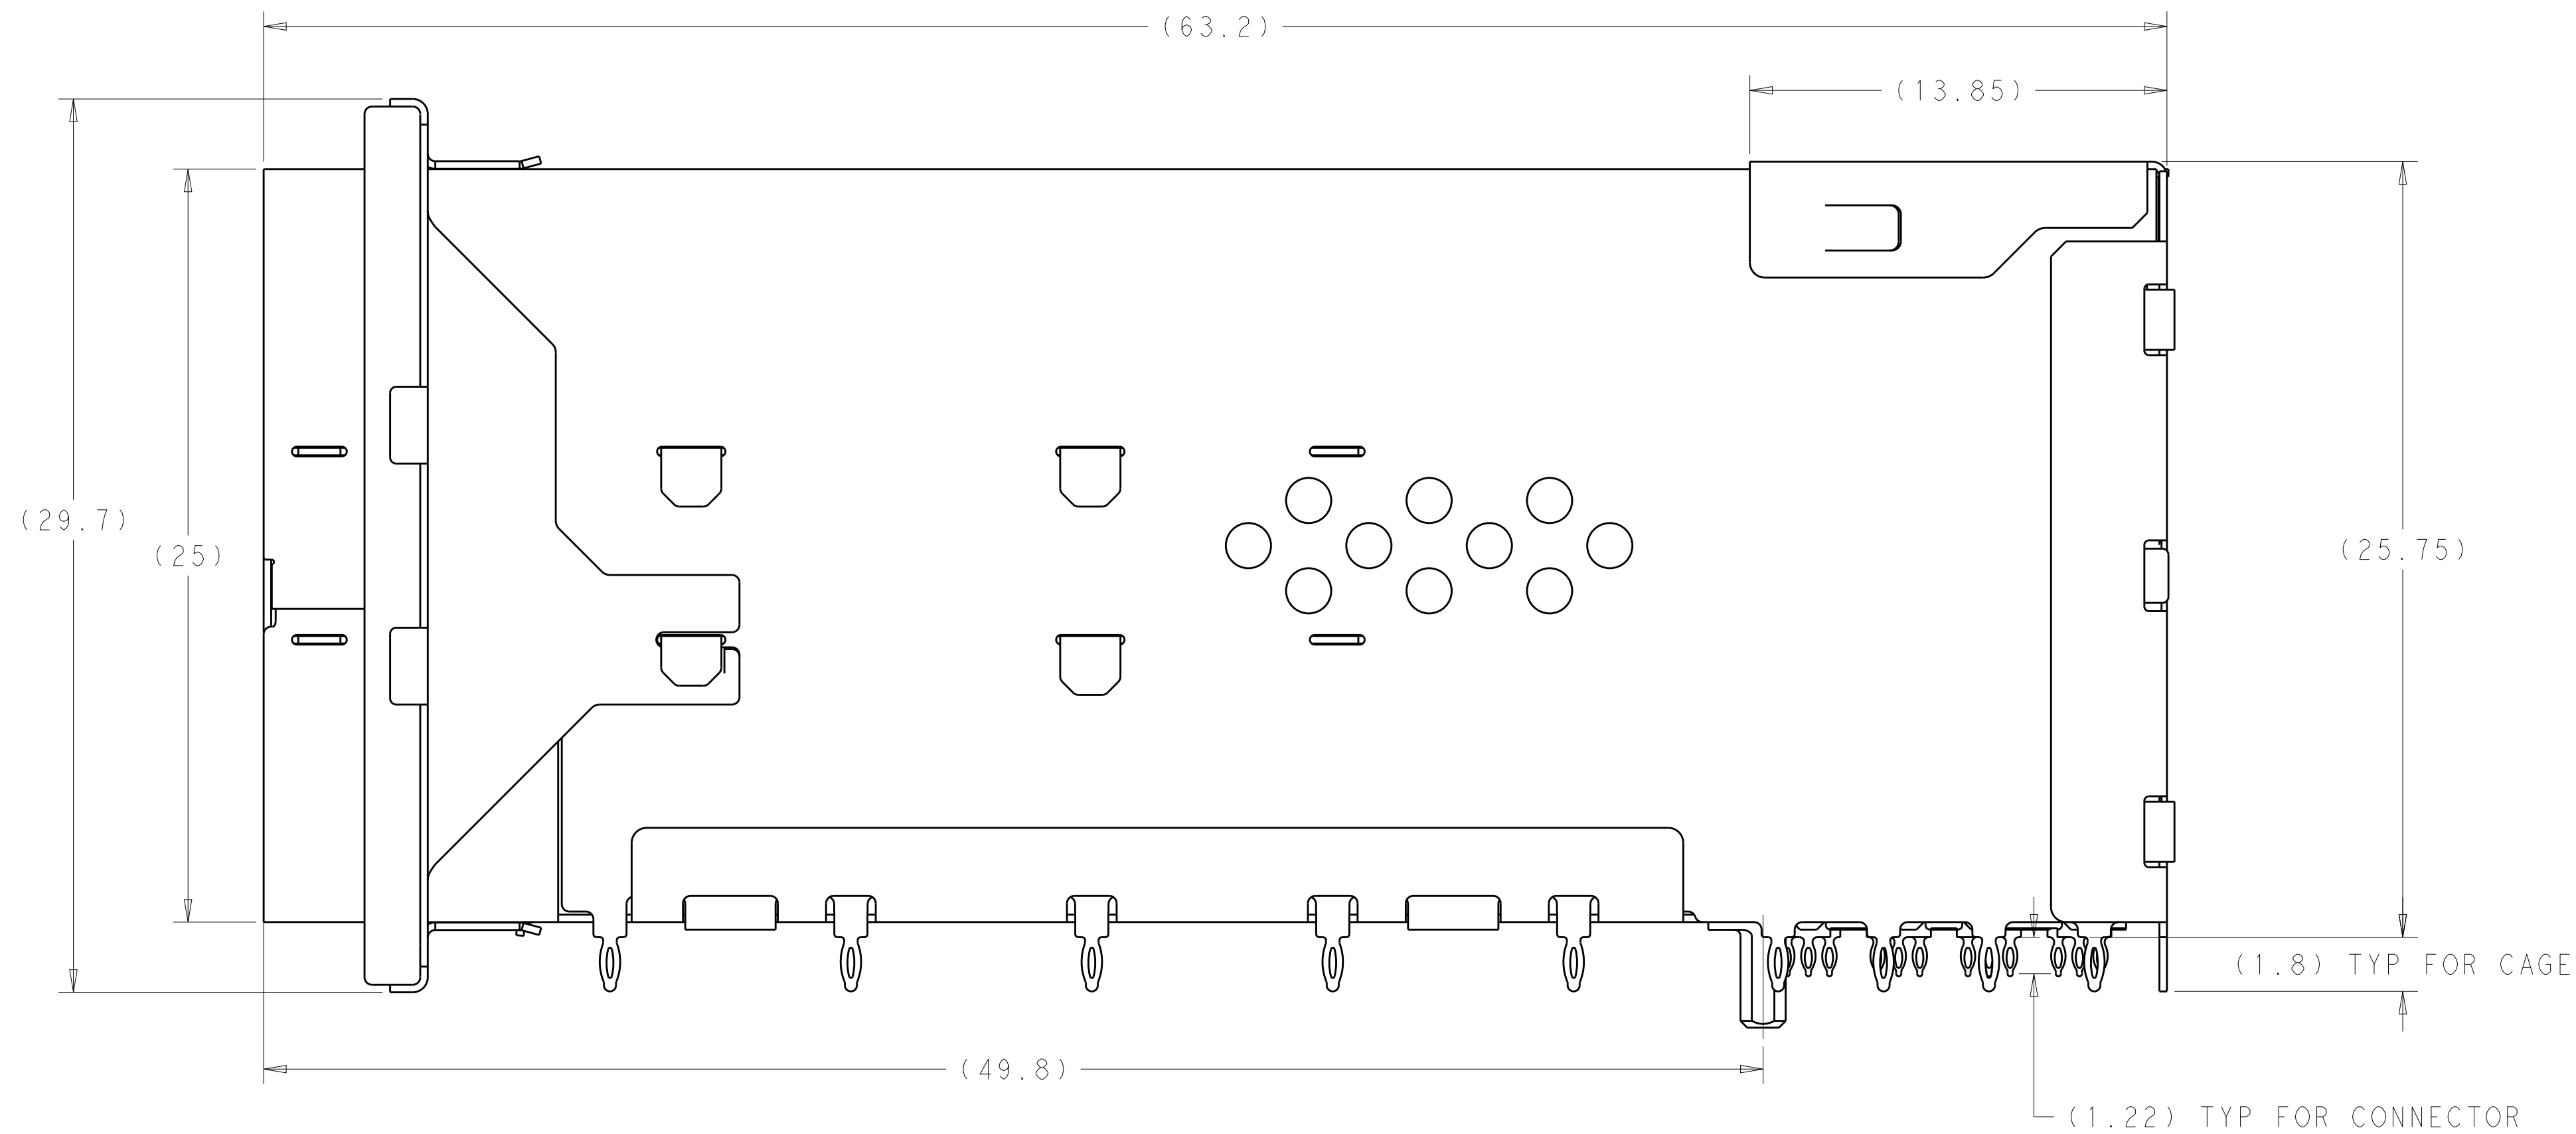


THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	J. WANG	26FEB2019	 TE Connectivity			
				CHK	S. HAN	26FEB2019				
				APVD	S. HAN	26FEB2019				
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		APPLICATION SPEC		RECEPTACLE ASSEMBLY, 2X1, STACKED, SFP56		
mm		0 PLC ±0.25		108-2481		114-13319				
		1 PLC ±0.25								
		2 PLC ±0.25								
		3 PLC ±0.25								
		4 PLC ±								
		ANGLES ±°								
		FINISH								
MATERIAL		SEE NOTES		WEIGHT						

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00	-	-	SEE SHEET 1	-	-	-

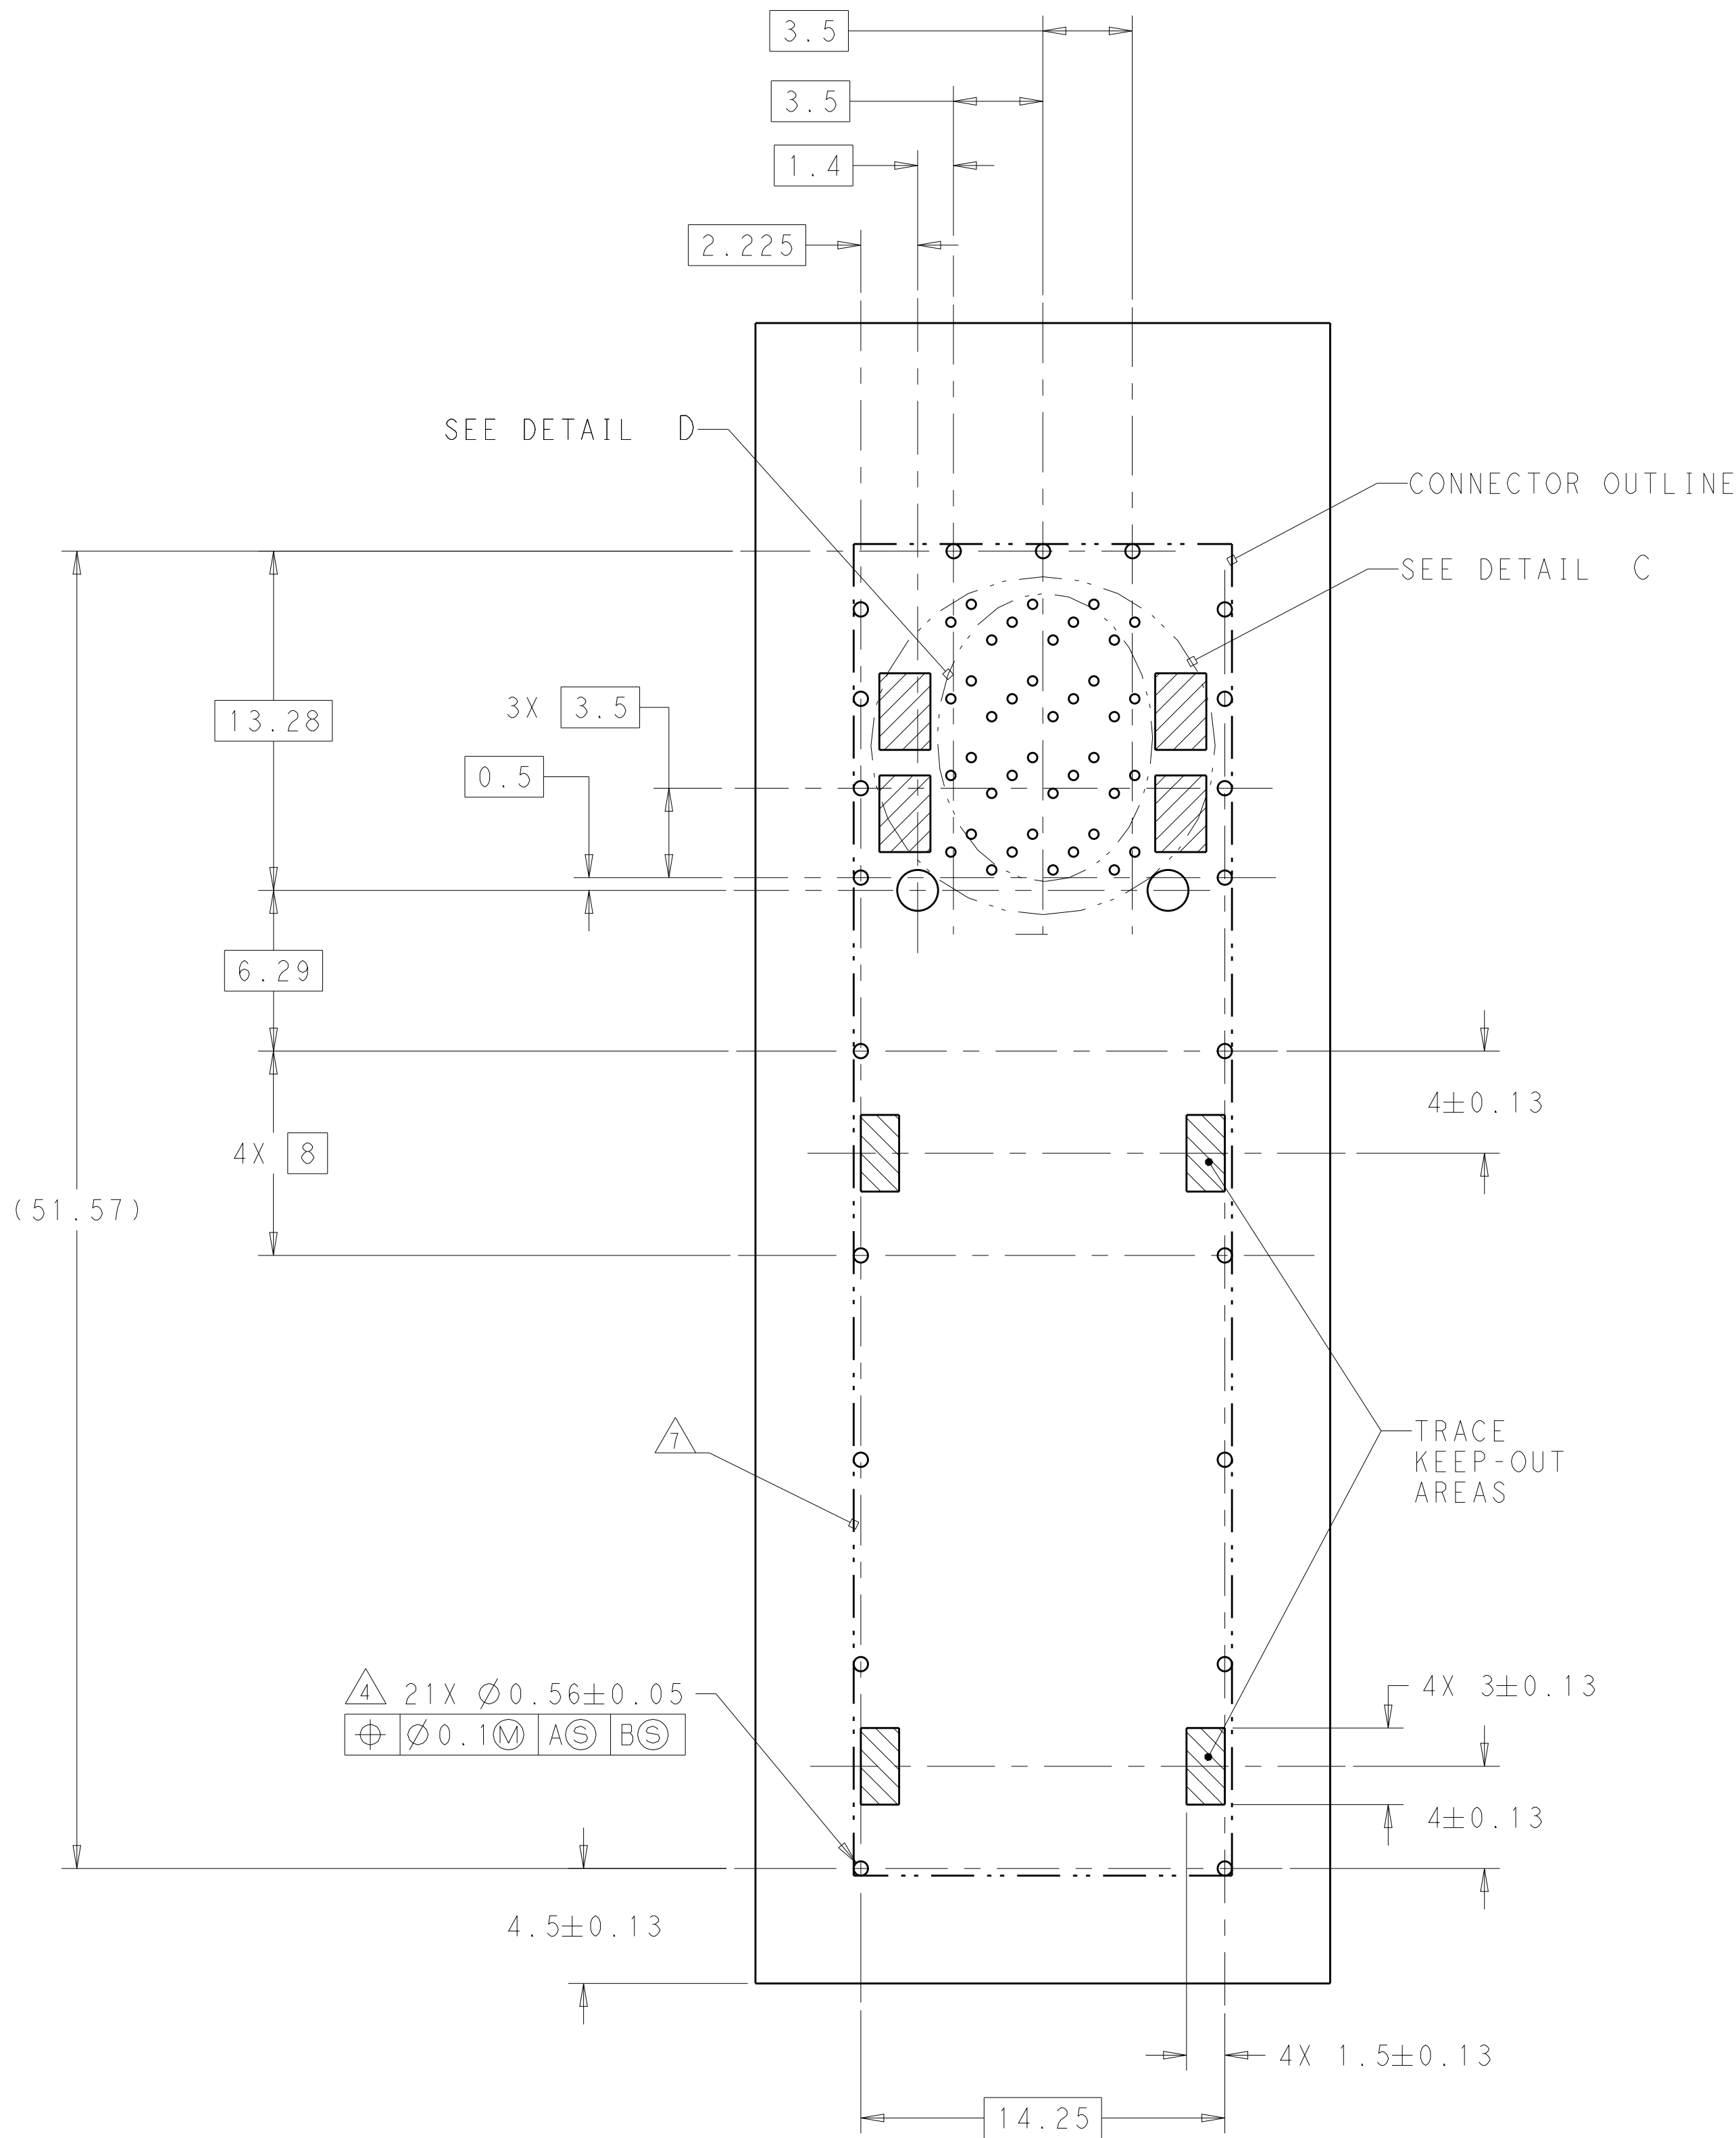

RECOMMENDED PCB LAYOUT
SCALE 5:1

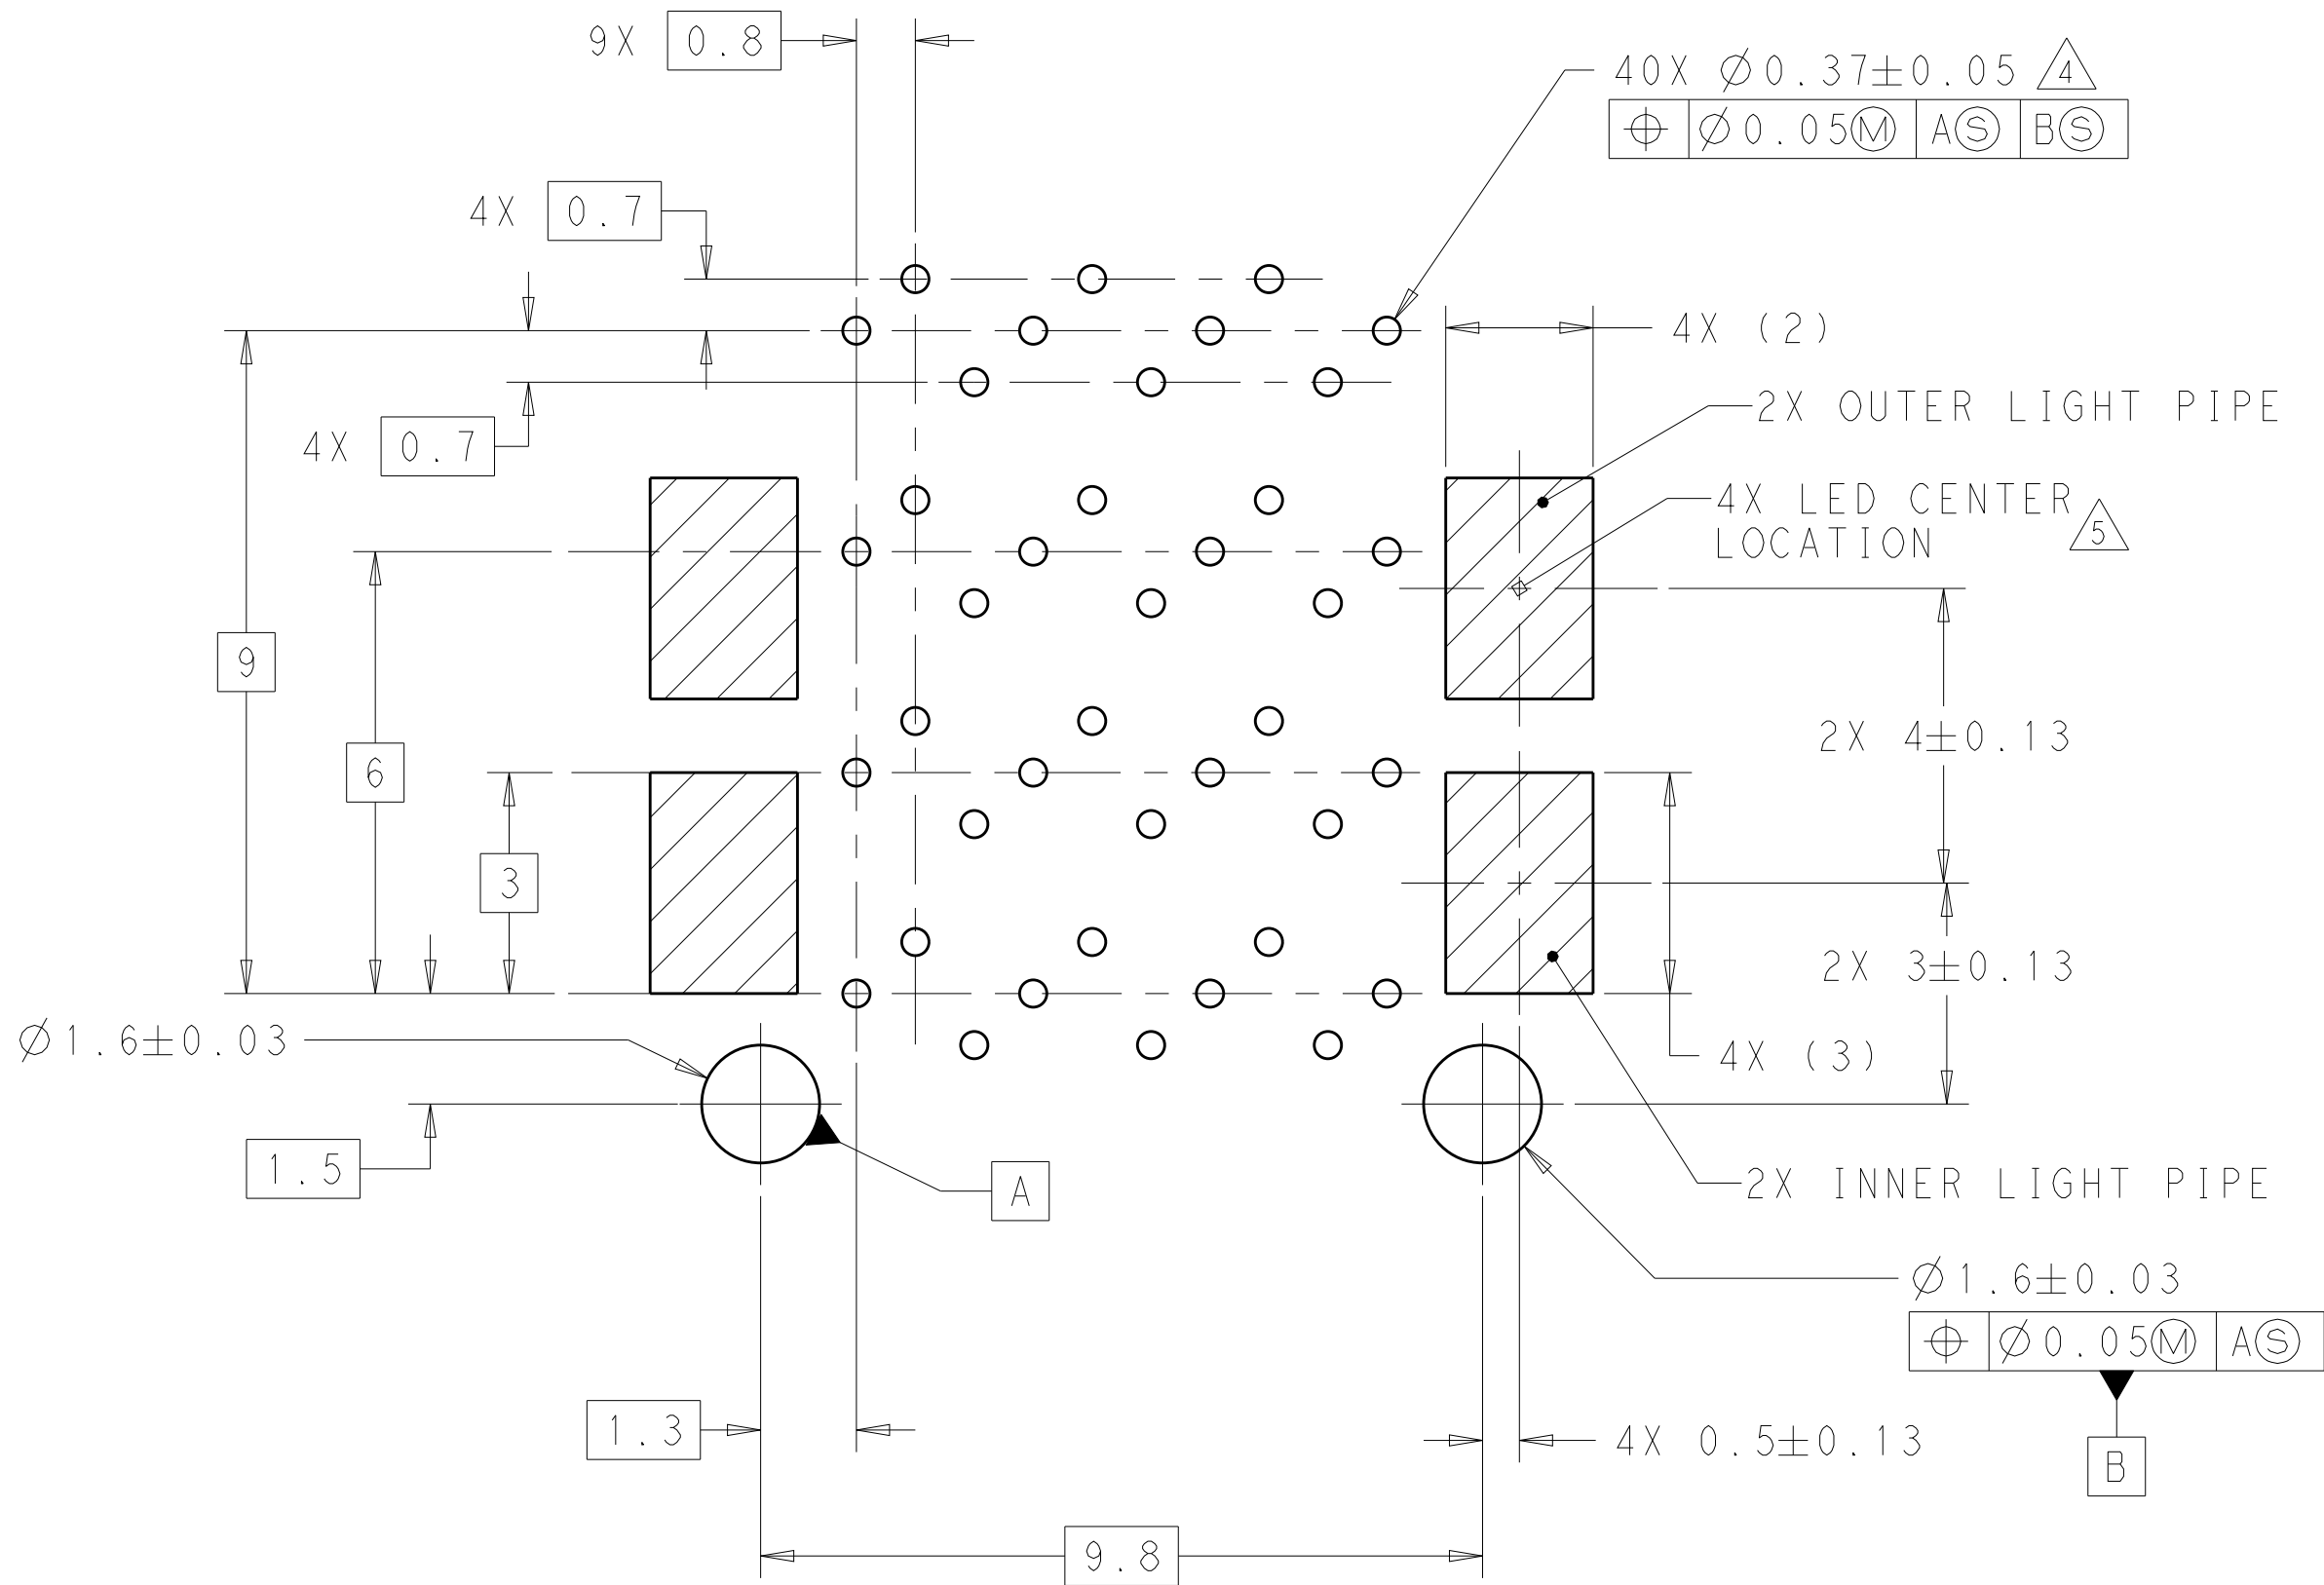

DETAIL C
RECOMMENDED PIN AND LIGHT PIPE LAYOUT
SCALE 10:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. WANG 26FEB2019	TE Connectivity	
DIMENSIONS:		CHK S. HAN 26FEB2019		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD S. HAN 26FEB2019	NAME RECEPTACLE ASSEMBLY, 2X1, STACKED, SFP56	
	0 PLC ±0.25	PRODUCT SPEC	SIZE A100779C=2349202	
	1 PLC ±0.25	108-2481		
	2 PLC ±0.25	APPLICATION SPEC		
	3 PLC ±0.25	114-13319		
MATERIAL SEE NOTES	ANGLES FINISH ±4°	WEIGHT -	CUSTOMER DRAWING	
		SCALE 4:1	SHEET 3	REV A

LOC		DIST		REVISIONS					
GP			00	P	LTR	DESCRIPTION	DATE	DWN	APVD
				-		SEE SHEET 1	-	-	-

T19○ T16○ T13○
T20○ T17○ T14○ T11○
T18○ T15○ T12○


T2○ T5○ T8○
T1○ T4○ T7○ T10○
T3○ T6○ T9○

L9○ L6○ L3○
L10○ L7○ L4○ L1○
L8○ L5○ L2○



L12○ L15○ L18○
L11○ L14○ L17○ L20○
L13○ L16○ L19○

DETAIL D
PIN MAP
SCALE 15:1

PIN MAP LEGEND	
PIN NUMBER	FUNCTION
L1/T1	VEET
L2/T2	TX-FAULT
L3/T3	TX-DISABLE
L4/T4	SDA
L5/T5	SCL
L6/T6	MOD_ABS
L7/T7	RSO
L8/T8	RX_LOS
L9/T9	RS1
L10/T10	VEER
L11/T11	VEER
L12/T12	RD-
L13/T13	RD+
L14/T14	VEER
L15/T15	VCCR
L16/T16	VCCT
L17/T17	VEET
L18/T18	TD+
L19/T19	TD-
L20/T20	VEET

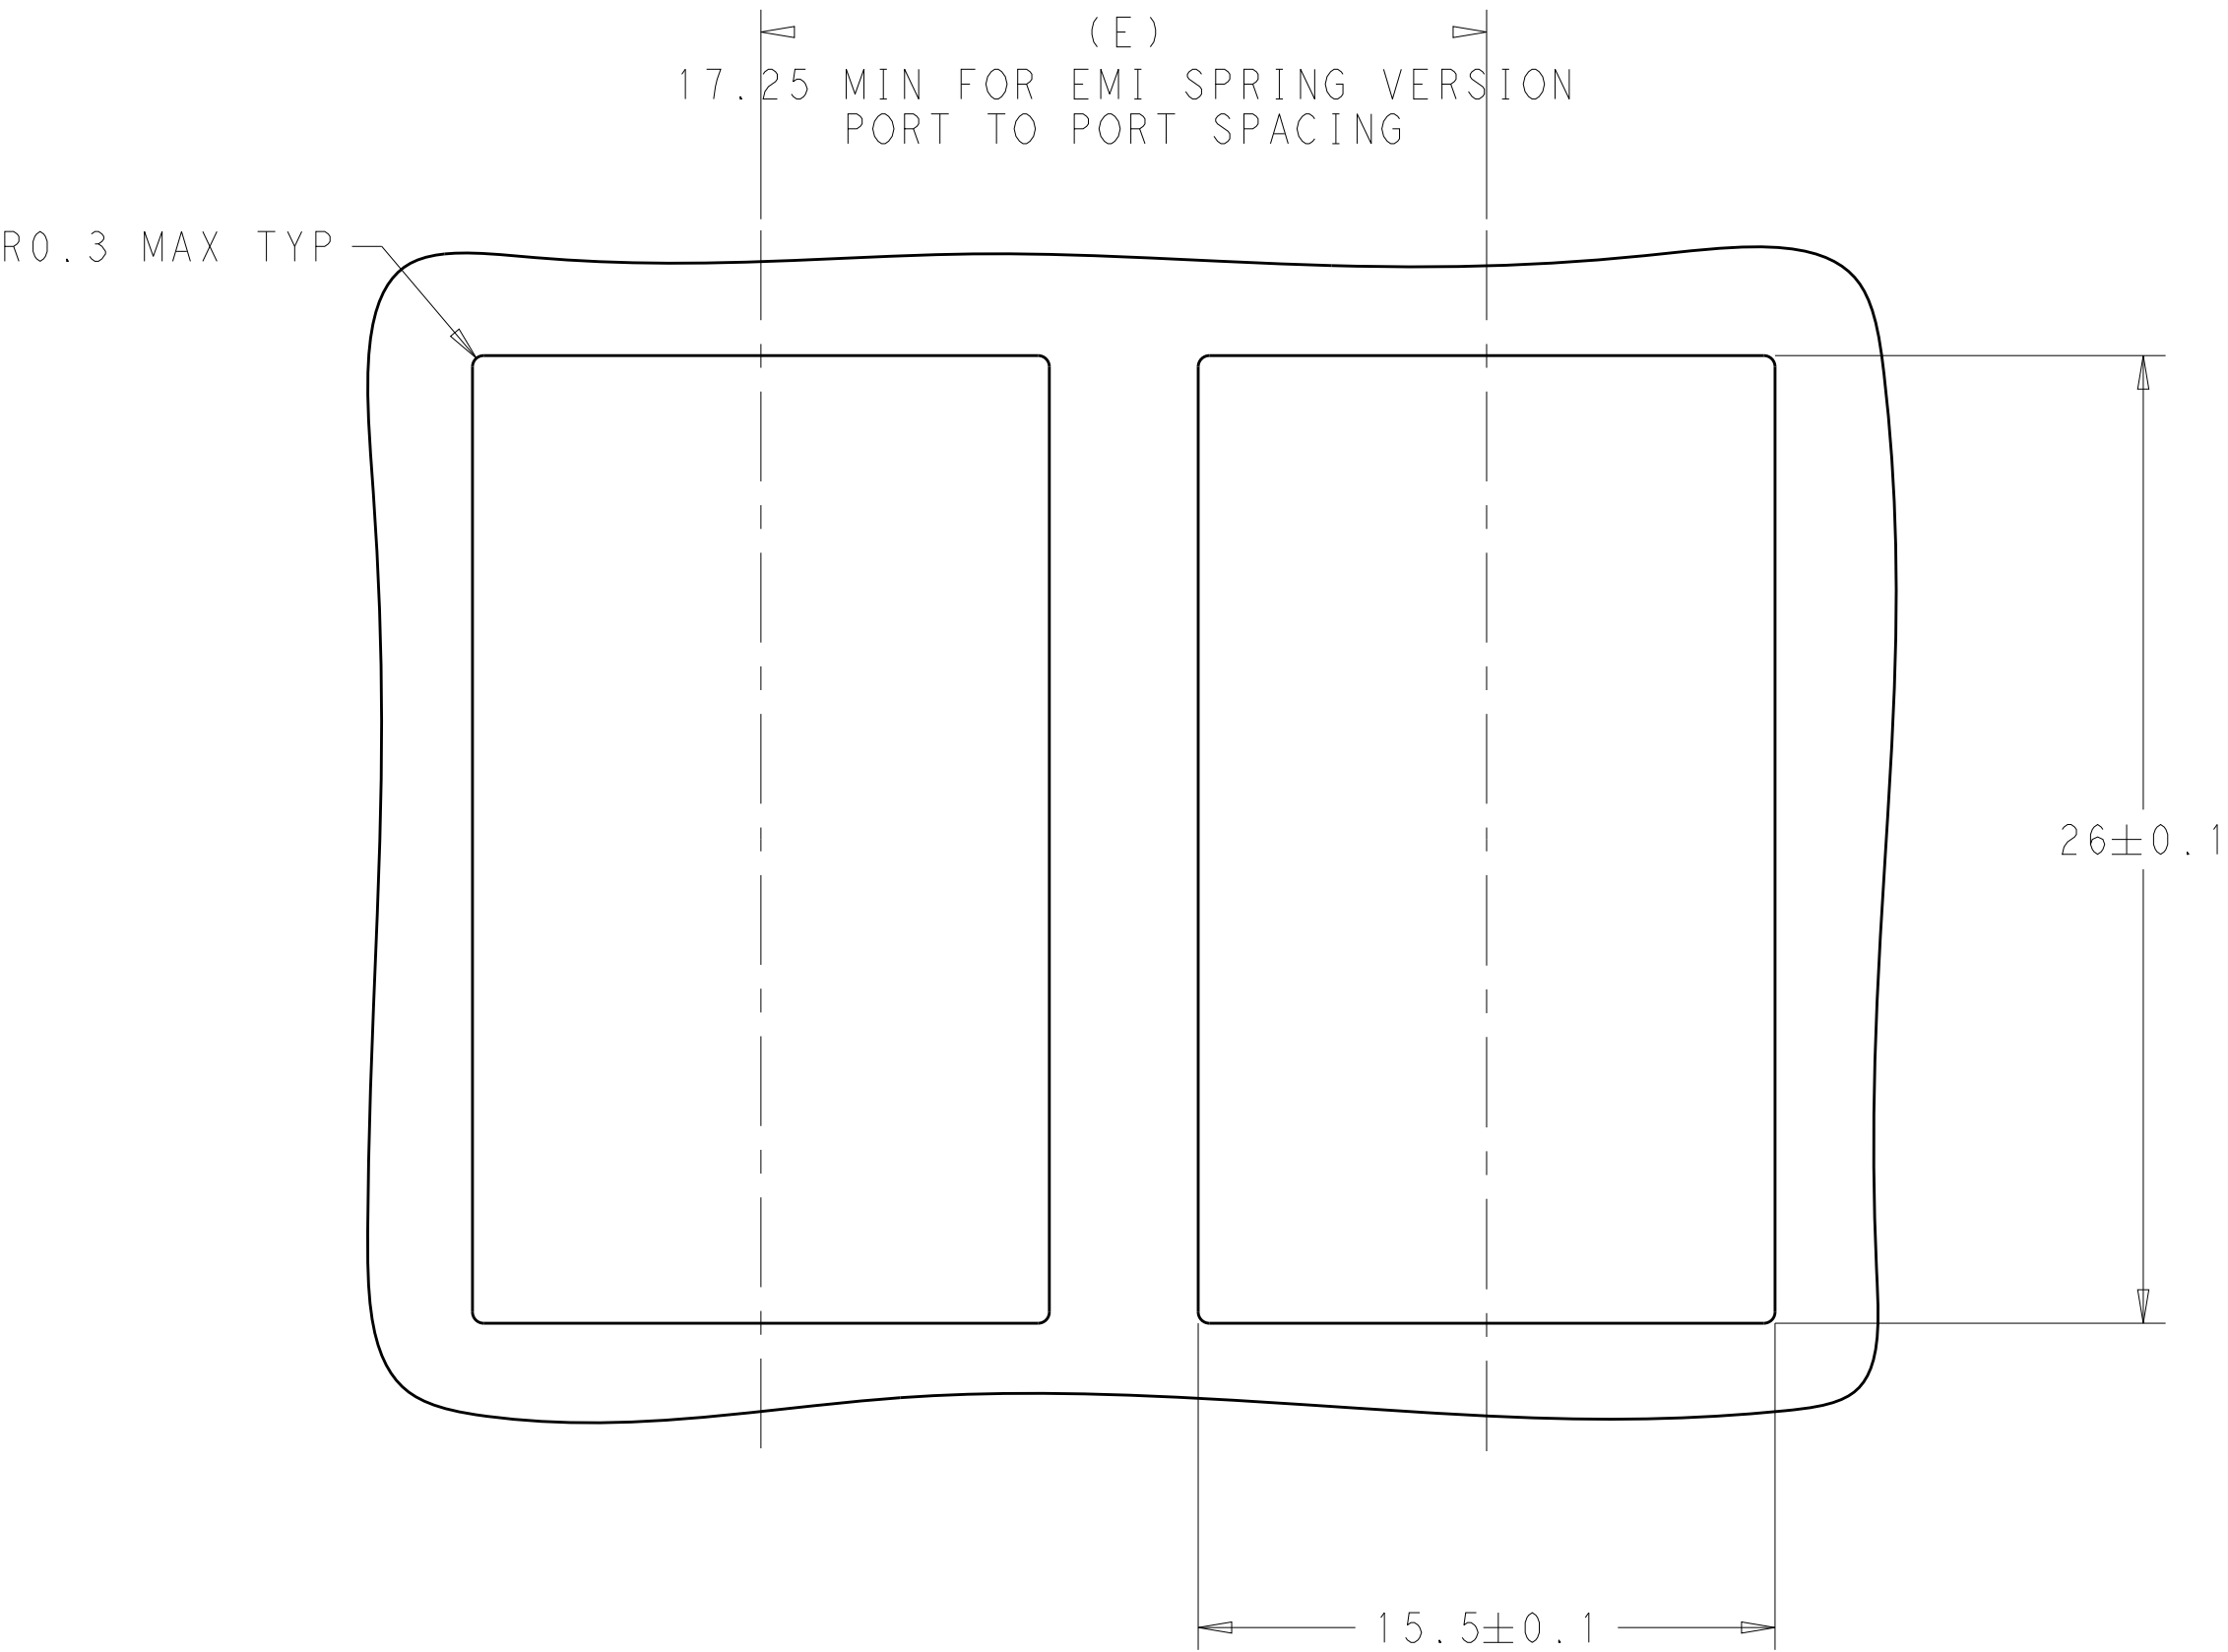

RECOMMENDED BEZEL CUT-OUT DETAIL
SCALE 5:1

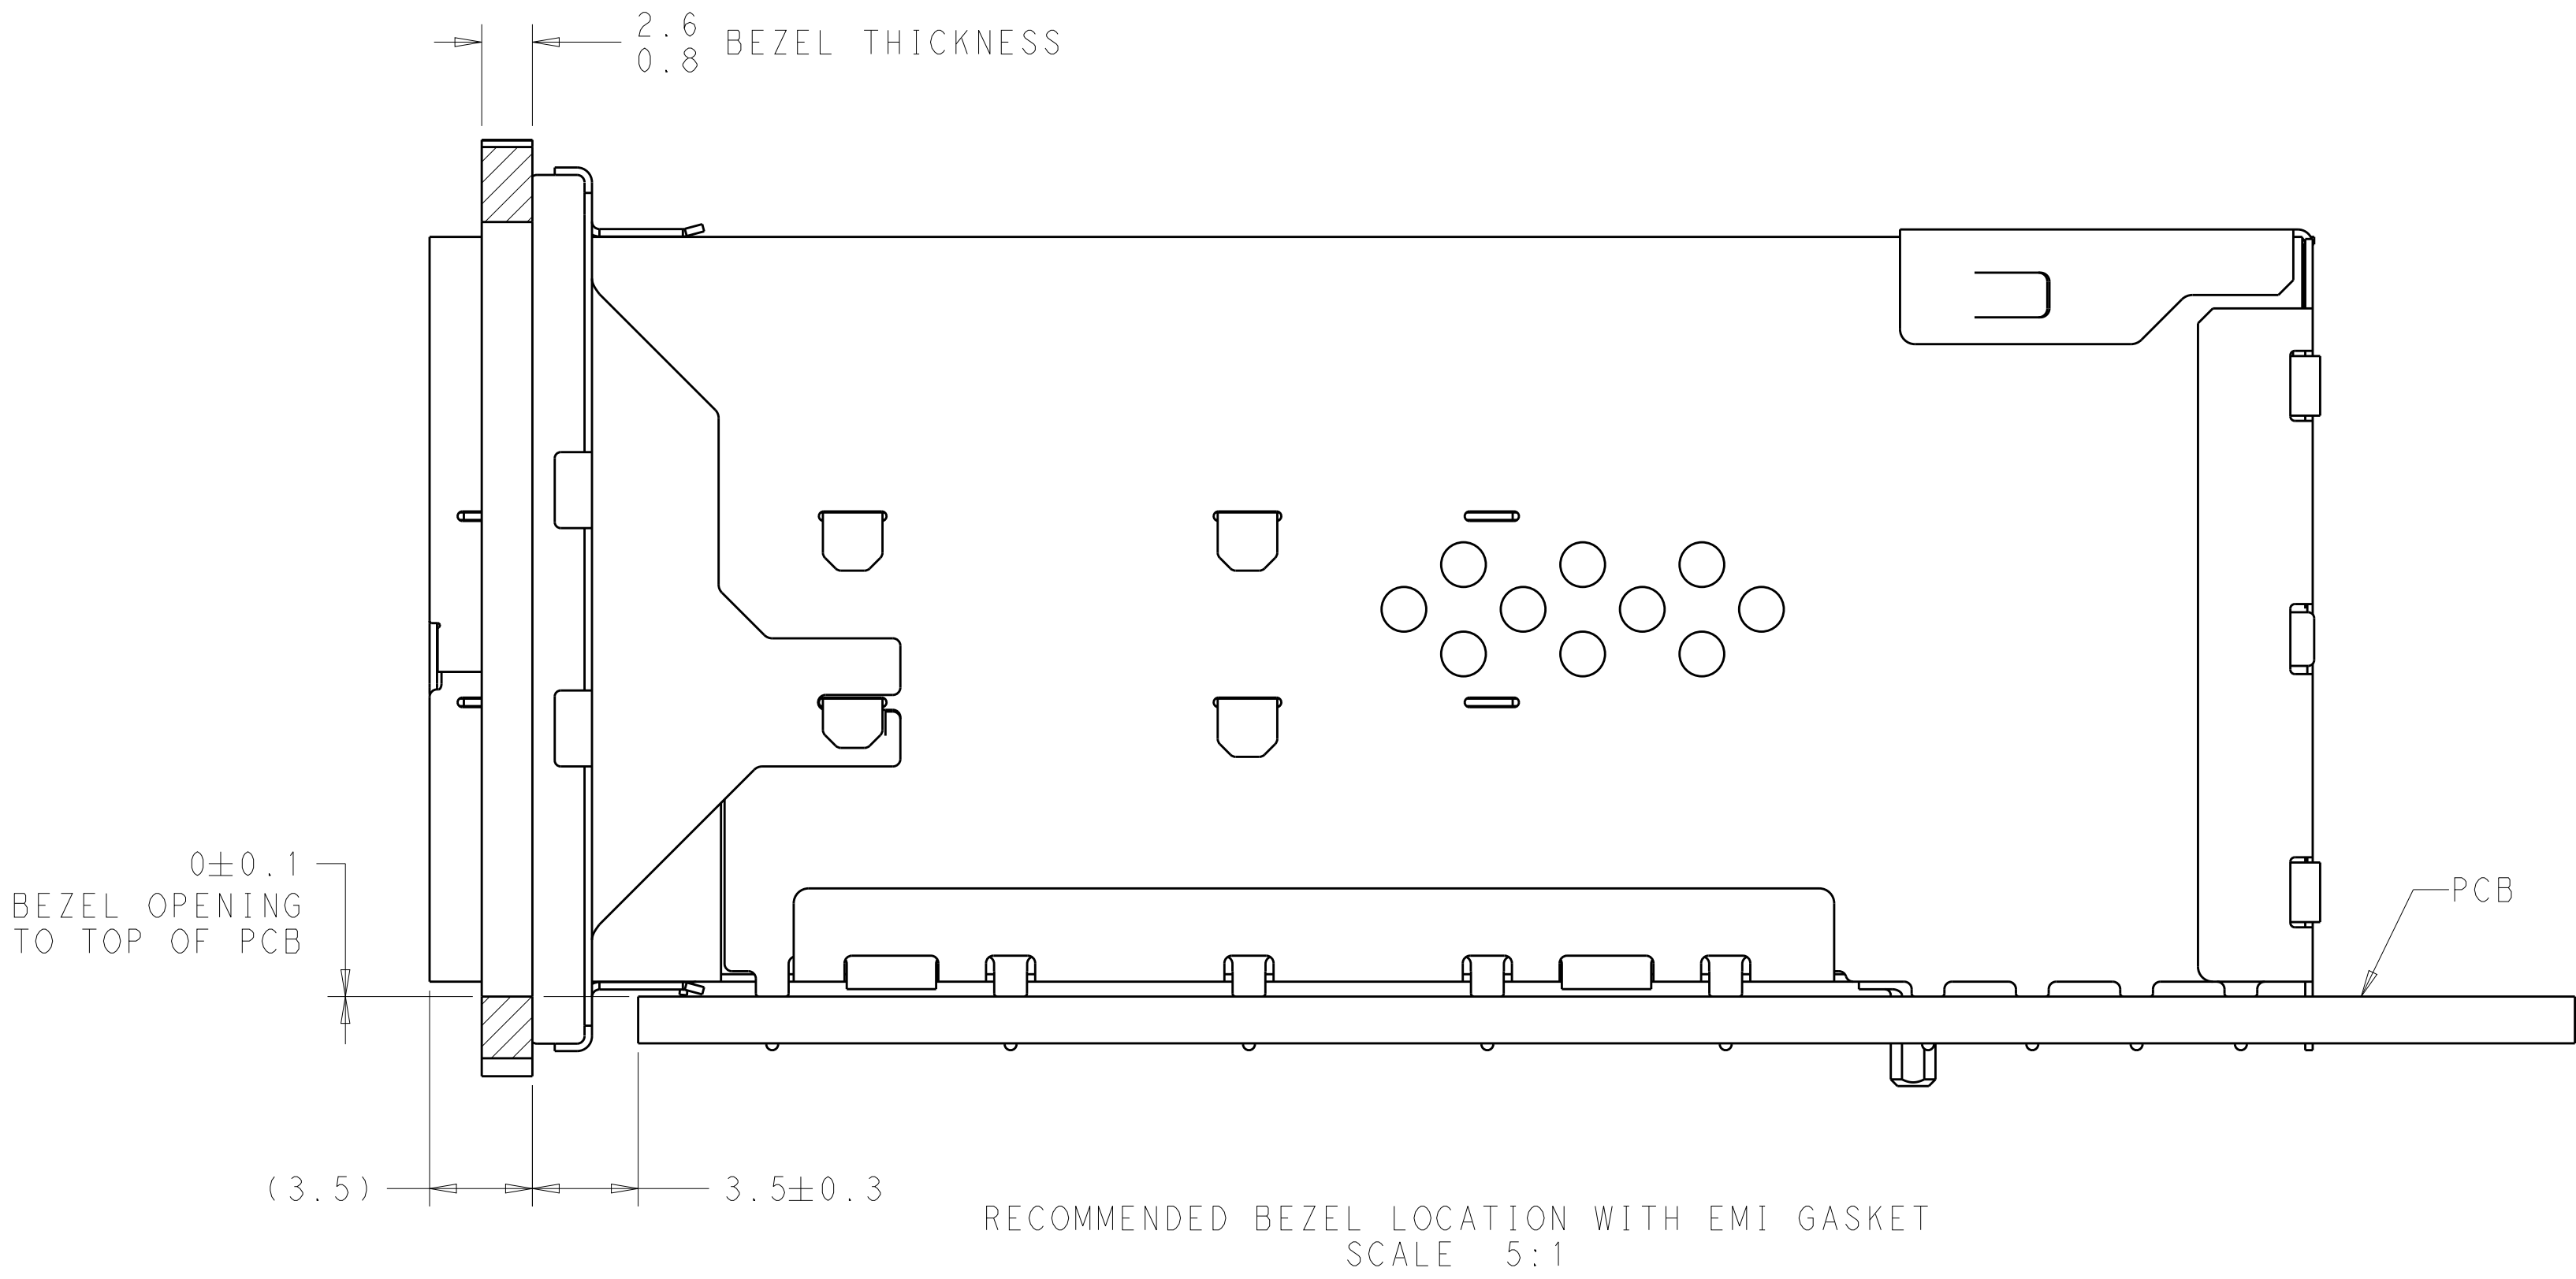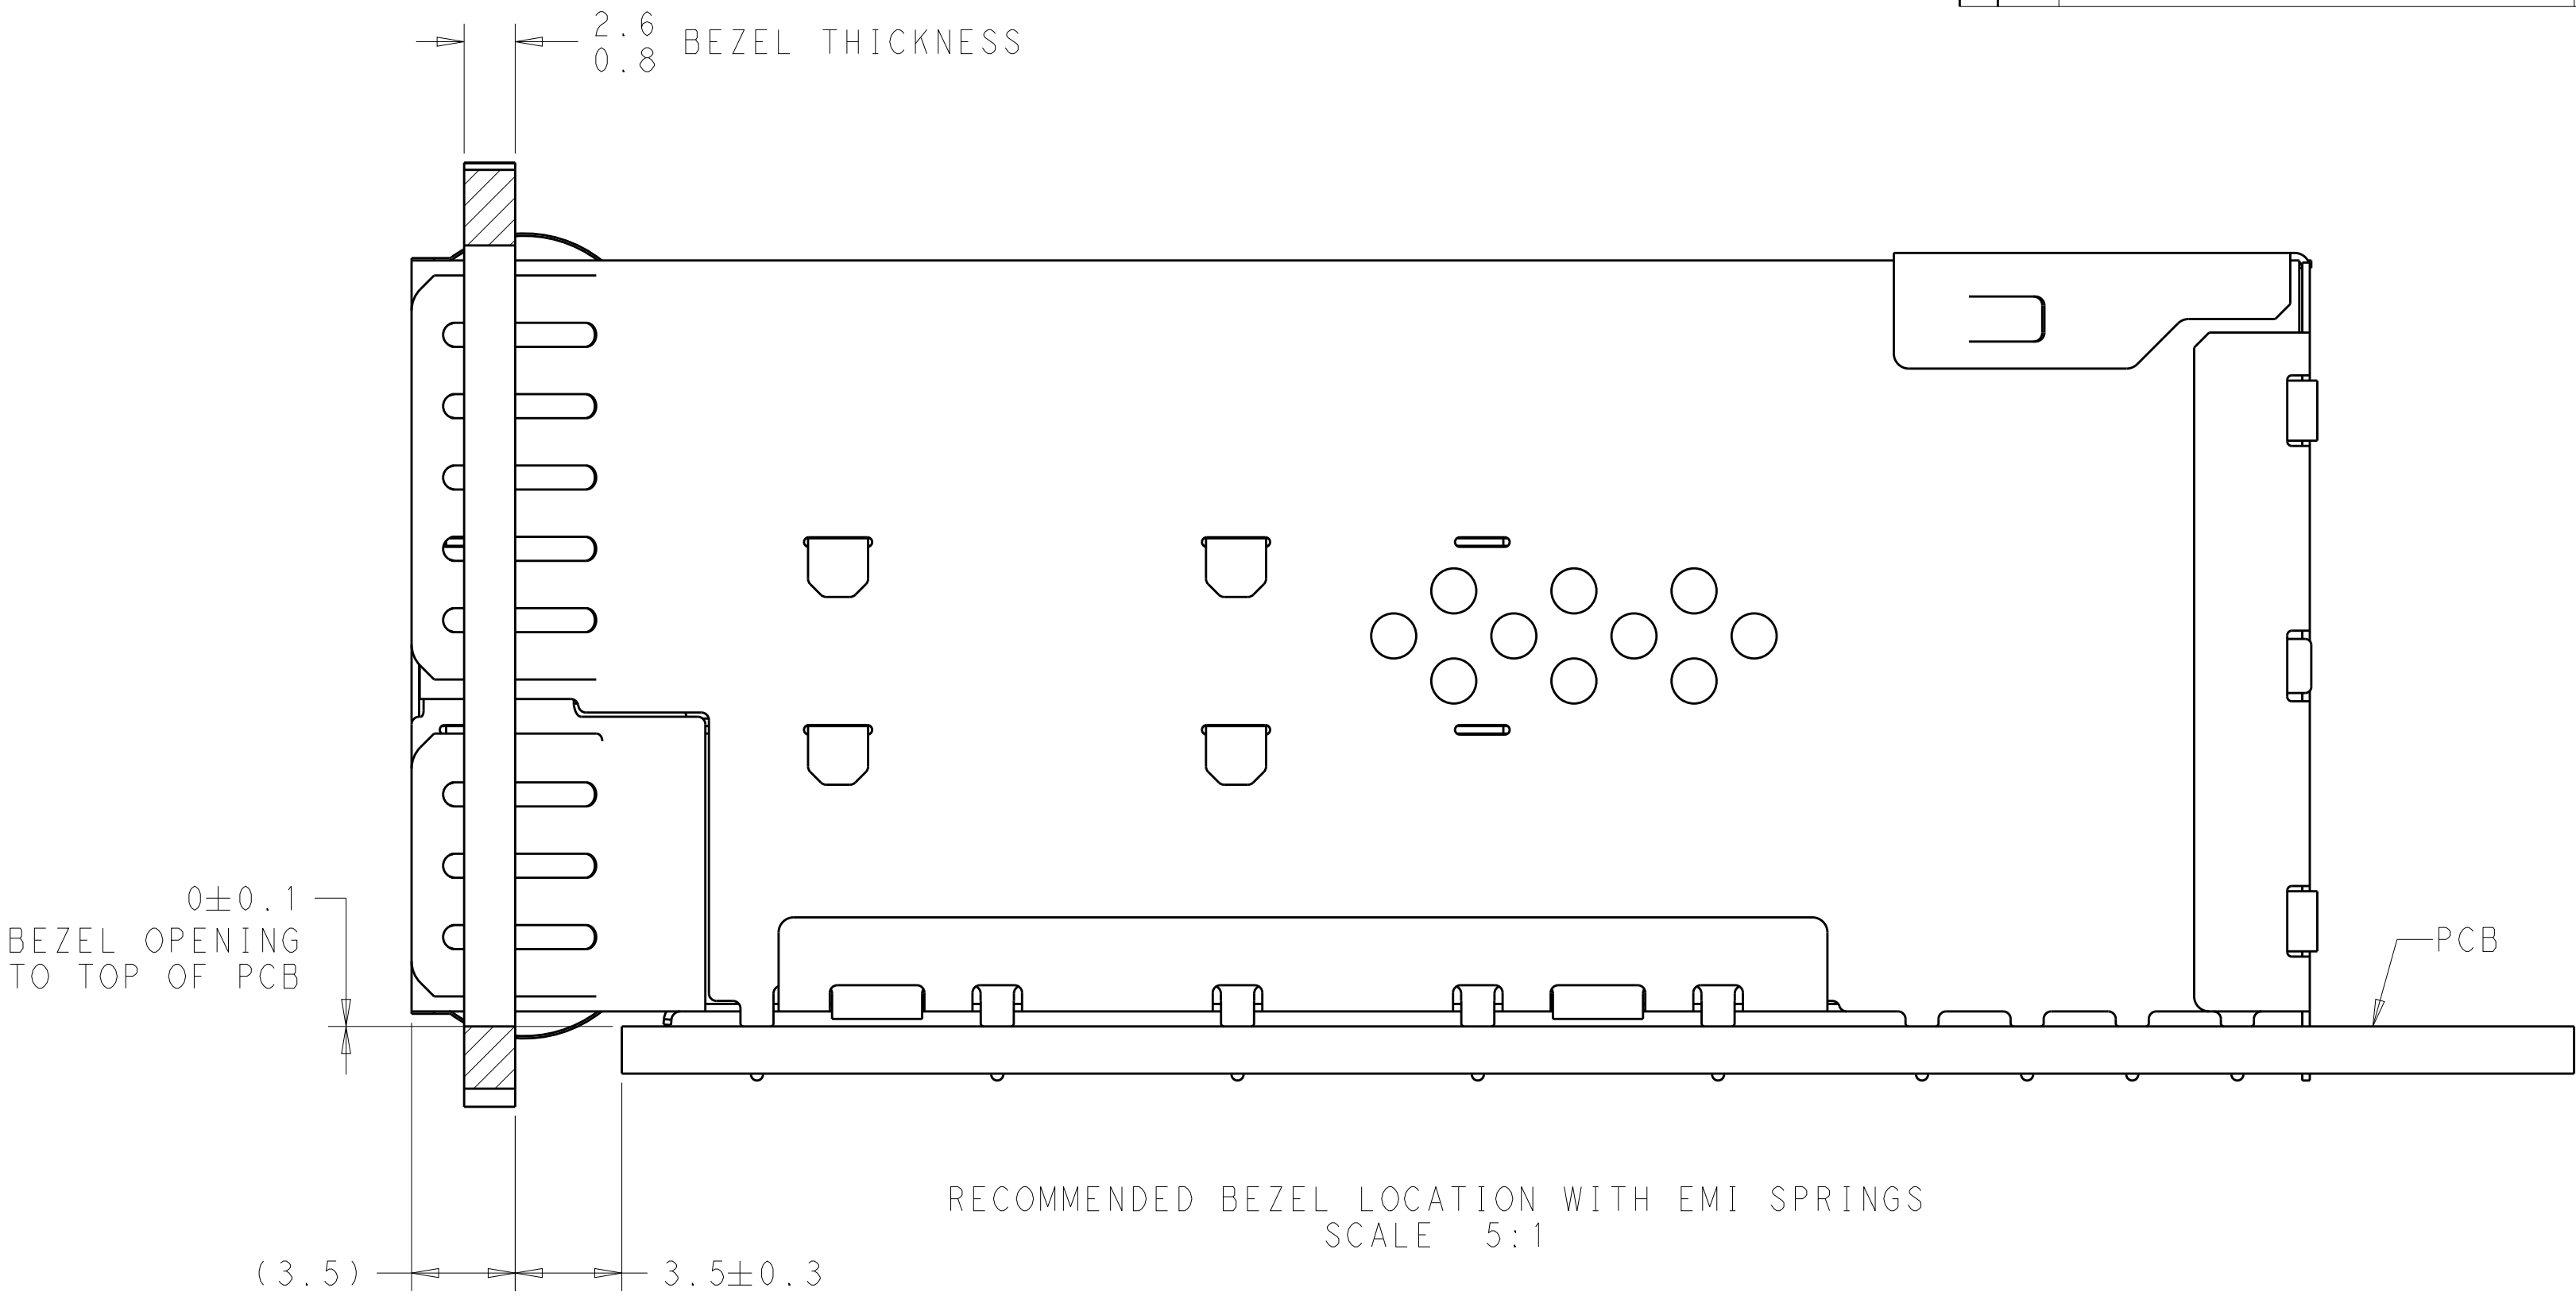

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. WANG 26FEB2019	TE Connectivity	
		CHK S. HAN 26FEB2019		
DIMENSIONS:		APVD S. HAN 26FEB2019	NAME RECEPTACLE ASSEMBLY, 2X1, STACKED, SFP56	
mm		PRODUCT SPEC		
		108-2481	SIZE CAGE CODE DRAWING NO	
		APPLICATION SPEC		
		114-13319	A100779C=2349202	
		WEIGHT		
MATERIAL SEE NOTES		CUSTOMER DRAWING		RESTRICTED TO
		SCALE 4:1 SHEET 4 OF 4 REV A		

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru