


spec ref *				dr Louis Ng 2010/11/01		projection 		mm 		size A4		scale 11:10					
tolerance std ASME Y14.5 - TOLERANCES UNLESS OTHERWISE SPECIFIED				eng Nickor Zuo 2011/05/31				ecn no ELX-DG-003943-1									
				chr Alex Cao 2011/06/24				rel level Released									
appr Pei-Ming Zheng 2011/06/27				product family GIG-Array													
surface  - linear						title 5mm RECEPTACLE ASSY. 200 SIG. POS. WITH NITROGEN BGA				dwg no 10097161				rev B			
																0.X ±0.30	
																0.XX ±0.10	
0.XXX ±0.05																	
angular 0° ±2°		www.fci.com		cat. no. *		Product - Customer Drw				sheet 1 of 5							




Copyright FCI.

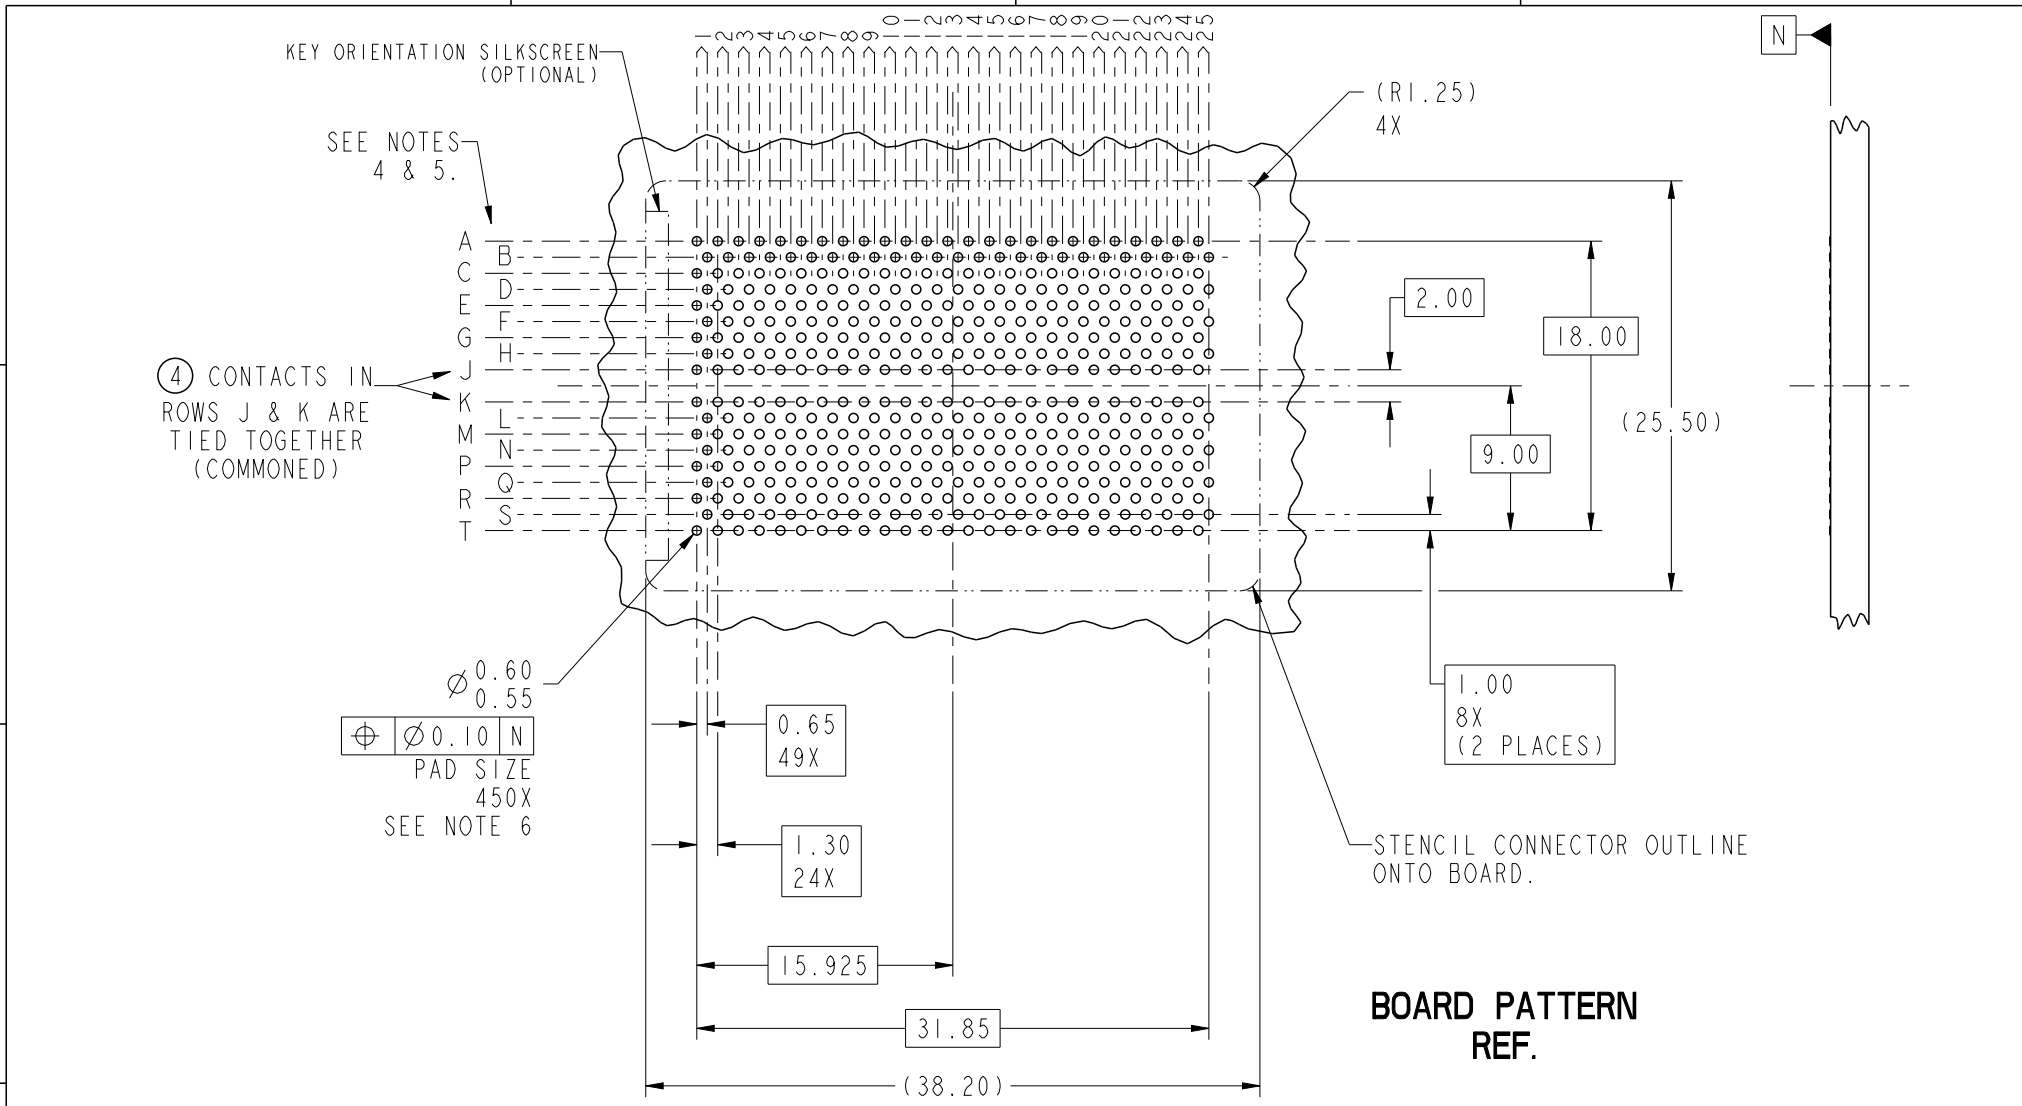


spec ref		*		dr	Louis Ng	2010/11/01	projection	mm	size	A4	scale	11:10	
tolerance std ASME Y14.5 -	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Nickor Zuo	2011/05/31			ecn no				ELX-DG-003943-1
				chr	Alex Cao	2011/06/24			rel level				Released
				appr	Pei-Ming Zheng	2011/06/27			product family				GIG-Array
surface ✓ -	linear	0.X	±0.30		title 5mm RECEPTACLE ASSY. 200 SIG. POS. WITH NITROGEN BGA				dwg no	10097161		rev B	
		0.XX	±0.10										
		0.XXX	±0.05										
	angular	0°	±2°	www.fci.com	cat. no.			*	Product - Customer Drw		sheet 2 of 5		


PrintE File - REV C - 2009-06-09

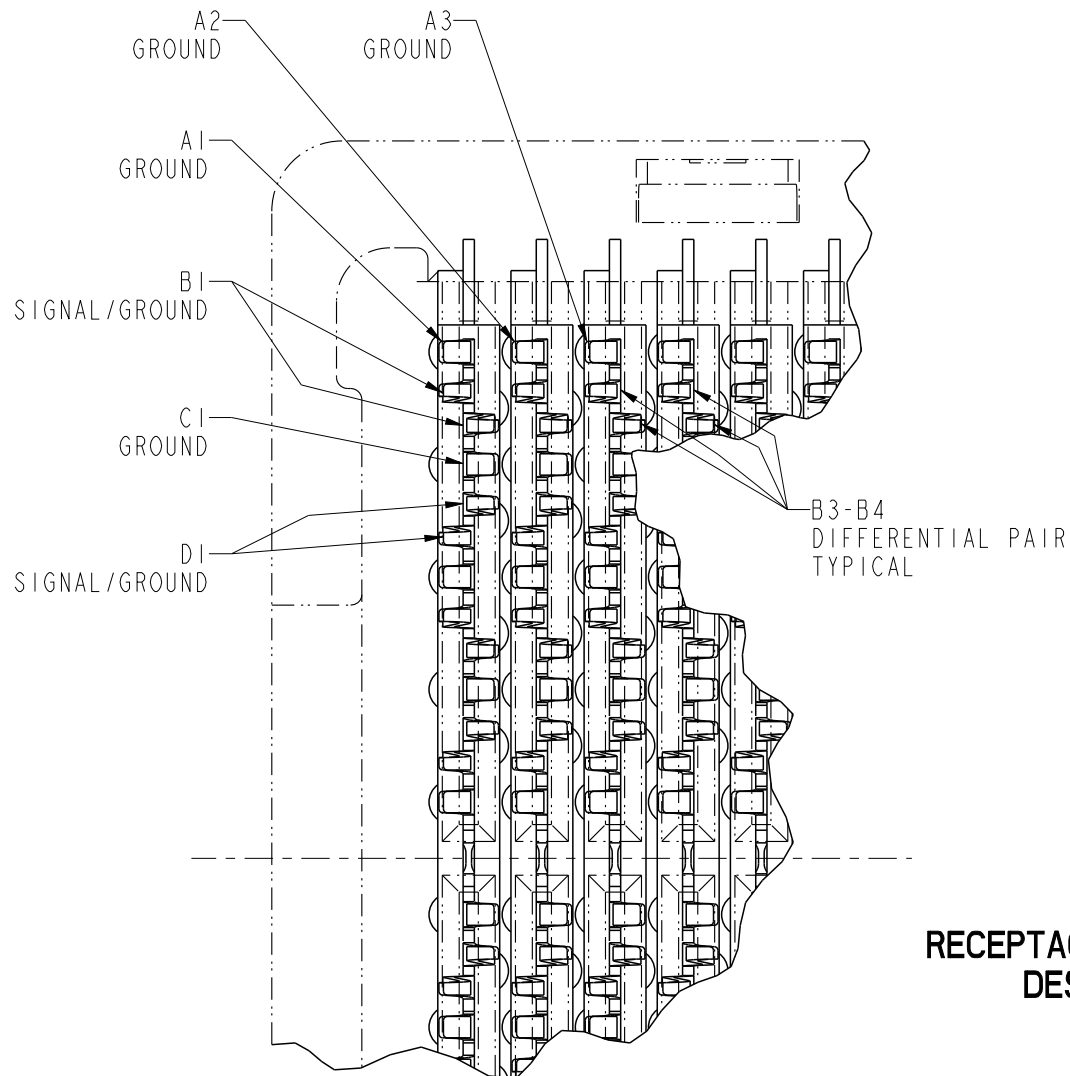


RECEPTACLE INTERFACE DESCRIPTION

spec ref	*			dr	Louis Ng	2010/11/01	projection 	mm 	size	A4	scale	37:5	
tolerance std ASME Y14.5 -	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Nickor Zuo	2011/05/31			ecn no	ELX-DG-003943-1			
				chr	Alex Cao	2011/06/24				rel level	Released		
				appr	Pei-Ming Zheng	2011/06/27	product family		GIG-Array				
surface ✓ -	linear	0.X	±0.30		title	5mm RECEPTACLE ASSY. 200 SIG. POS. WITH NITROGEN BGA			dwg no	10097161		rev	B
		0.XX	±0.10										
		0.XXX	±0.05										
		angular	0°	±2°	www.fci.com	cat. no.	*	Product - Customer Drw			sheet 3 of 5		

FLAT AREA
FOR OPTIONAL
PICK-UP CAP
SCALE 2:1

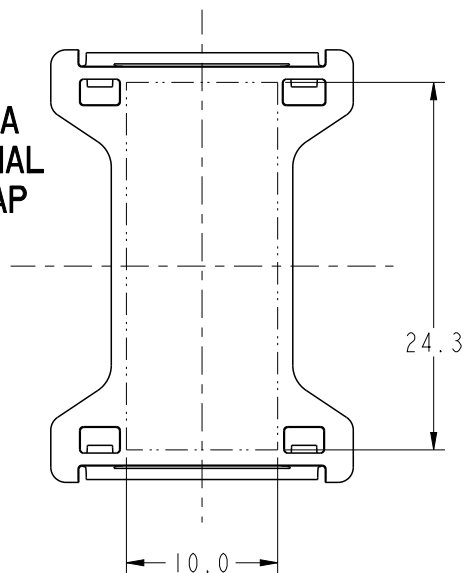


DIM "A" REF.
MATED HEIGHT
AFTER REFLOW
SEE NOTE 3.

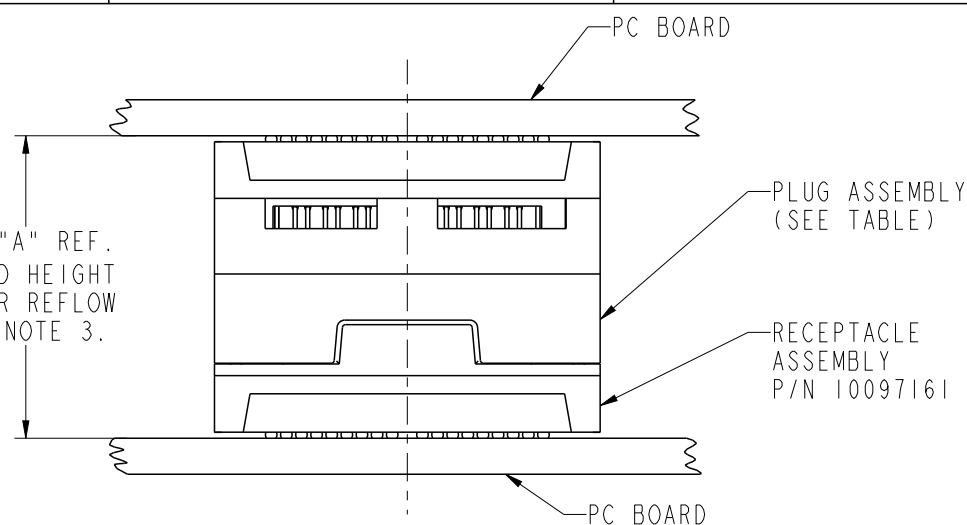

END VIEW OF MATED CONNECTORS
SCALE 2:1

DIM. "A"	PLUG ASSEMBLY P/N
15	55737
17	10026802
18	10060910
20	55738
25	55739
30	10054783

spec ref		*		dr	Louis Ng	2010/11/01	projection 	mm 	size	A4	scale	11:10	
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng	Nickor Zuo	2011/05/31			ecn no	ELX-DG-003943-1			
ASME Y14.5				chr	Alex Cao	2011/06/24							
-				appr	Pei-Ming Zheng	2011/06/27	product family		GIG-Array		rel level		Released
surface 	linear	0.X	±0.30		title	5mm RECEPTACLE ASSY. 200 SIG. POS. WITH NITROGEN BGA			dwg no	10097161		rev	B
		0.XX	±0.10										
		0.XXX	±0.05										
-	angular	0°	±2°	www.fci.com	cat. no.	*	Product - Customer Drw			sheet 4 of 5			

PRODUCT NUMBER	SOLDER BALL COMPOSITION	CONTACT PLATING PERFORMANCE LEVEL
10097161-001	STANDARD (EUTECTIC)	PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12-192, INCLUDING TELCORDIA CENTRAL OFFICE
10097161-001LF	LEADFREE	

NOTES:

① MATERIAL:

HOUSING: LCP
CONTACT: COPPER ALLOY
PLATING (CONTACT): Au OVER Ni.
UL RATING: 94 V-0
SOLDBALL: (SEE TABLE) EUTECTIC
SnPb OR LEAD FREE 95.5 Sn/4Ag/0.5Cu.

② SOLDER BALLS WILL NOT BE PERFECT SPHERICAL SHAPE DUE TO REFLOW ATTACHMENT.

③ MATED HEIGHT EFFECTED BY CUSTOMERS' PCB PAD SIZE, PLATING, SOLDER REFLOW PROFILE & SOLDER PASTE.


④ CONTACTS IN ROWS A,C,E,G,J,K,M,P,R AND T ARE SINGLE BEAM CONTACTS, TYPICALLY USED AS GROUND PINS.
(NOTE: CONTACTS IN ROWS J & K ARE TIED TOGETHER [COMMONED])

⑤ CONTACTS IN ROWS B,D,F,H,L,N,Q AND S ARE DUAL BEAM CONTACTS, TYPICALLY USED AS SIGNAL PINS.

⑥ SPECIFIED POSITIONAL TOLERANCE DEFINES PAD TO PAD LOCATION WITHIN LAND PATTERN. POSITIONAL TOLERANCE OF LAND PATTERN TO FUDICIAL MARKS OR PCB DATUMS SHALL BE DEFINED BY CUSTOMER. FOR RECOMMENDED PRODUCT APPLICATION AND PCB DESIGN DETAILS, SEE DOC. NO. GS-20-016.

⑦ FOR PROPER APPLICATION FOLLOW FCI APPLICATION SPECIFICATION GS-20-033. LEAD FREE SOLDER BALLS WILL NOT SOLDER PROPERLY IN A LEADED SOLDER PROCESS DUE TO A HIGHER REFLOW TEMPERATURE. LEADFREE PRODUCT IS THEREFORE NOT BACKWARDS COMPATIBLE WITH LEADED OR SOME SOLDERING APPLICATIONS. REFERENCE FCI APPLICATION SPECIFICATION.

⑧ THIS PRODUCT MEETS THE EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008. PRODUCT MEETING THIS DIRECTIVE IS IDENTIFIED IN THE CODE NUMBER MARKED ON EACH PART BY HAVING AN "X" IN THE SEVENTH CHARACTER POSITION.

spec ref		*		dr		Louis Ng	2010/11/01	projection				mm		size		A4		scale		11:10					
tolerance std		ASME Y14.5		eng		Nickor Zuo	2011/05/31	chr		Alex Cao		2011/06/24	appr		Pei-Ming Zheng		2011/06/27	product family		GIG-Array		ecn no		ELX-DG-003943-1	
TOLERANCES UNLESS OTHERWISE SPECIFIED																						rel level		Released	
surface		✓		linear		0.X		±0.30		FCI		title		5mm RECEPTACLE ASSY.		dwg no		10097161		rev		B			
						0.XX		±0.10						200 SIG. POS. WITH NITROGEN BGA											
						0.XXX		±0.05																	
-				angular		0°		±2°		www.fci.com		cat. no.		*		Product - Customer Drw		sheet 5 of 5							

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru