


Data Sheet

Programmable Dual-Range DC Power Supplies 9170 & 9180 series



Outstanding performance combined with unique features

The 9170/9180 series programmable DC power supplies offer industry leading performance, designed to meet the most demanding applications in R&D, design verification, and production test. All nine models deliver clean, stable and precise output power due to their exceptionally low ripple and noise, low temperature coefficient, excellent regulation, and fast transient response time characteristics.

These power supplies are well suited for both bench use and ATE applications. For bench use, these power supplies offer an intuitive user interface with a full numerical keypad for convenient data entry. R&D and design engineers will appreciate front panel output and remote sense terminals (available on select models). Free application software is provided for remote control without the need for any computer programming. USB and optional GPIB/LAN interfaces combined with a fast transient response time, make this series ideal for ATE applications.

Additionally, this series offers unique features not typically found in other power sources on the market, such as versatile LED test modes,

modular interface card slots, automatic range selection, and an optional 8-bit bidirectional digital I/O interface.

To protect your DUT (device under test), the 9170/9180 series provides safety options such as OVP, OCP, and a key-lock feature to prevent accidental change of parameters that might damage your DUT. Built for reliability, the supplies are also backed by a 3 year warranty.

Output Rating	No. of Outputs	Model
0-10 V, 0-10 A / 0-20 V, 0-5 A	1	9171
0-35 V, 0-3 A / 0-70 V, 0-1.5 A	1	9172
0-10 V, 0-10 A / 0-20 V, 0-5 A	2	9173
0-35 V, 0-3 A / 0-70 V, 0-1.5 A	2	9174
0-18 V, 0-8 A / 0-36 V, 0-4 A	1	9181
0-10 V, 0-20 A / 0-20 V, 0-10 A	1	9182
0-35 V, 0-6 A / 0-70 V, 0-3 A	1	9183
0-100 V, 0-2 A / 0-200 V, 0-1 A	1	9184
0-400 V, 0-0.5 A / 0-600 V, 0-0.35 A	1	9185

Features & Benefits


- Single and dual output models with up to 210W output power
- Dual range output with automatic range selection*
- Programmable voltage and current slew rates
- Front and rear panel output terminals for convenient wiring
- Rear panel remote sense terminal (additional front panel remote sense terminal on select single channel models*)
- List mode for executing up to 10 stored test sequences with a maximum of 150 steps in total
- Store and recall up to 10 power settings
- SCPI compliant USB standard interface, RS232, GPIB & LAN, RS485 optional (Installation through modular interface slots)
- Remote analog programming interface (option)
- Unique LED test modes for minimizing inrush current
- Application software for remote control
- Overvoltage (OVP) and overcurrent (OCP) protection, including key-lock function
- Convenient voltage and current calibration via front panel
- LabVIEW™ drivers available for download

* Except for high voltage models 9184 and 9185.

Front panel



Dual channel models

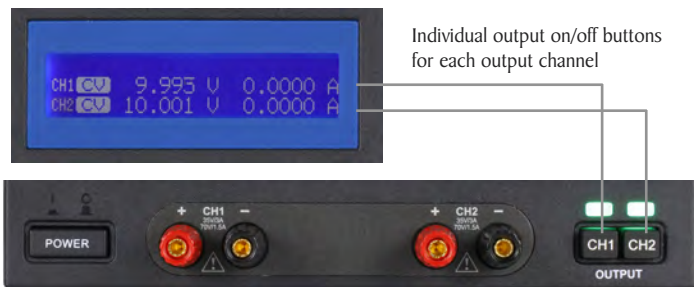


High voltage models



High voltage models come with special binding posts engineered for maximum safety

Rear panel

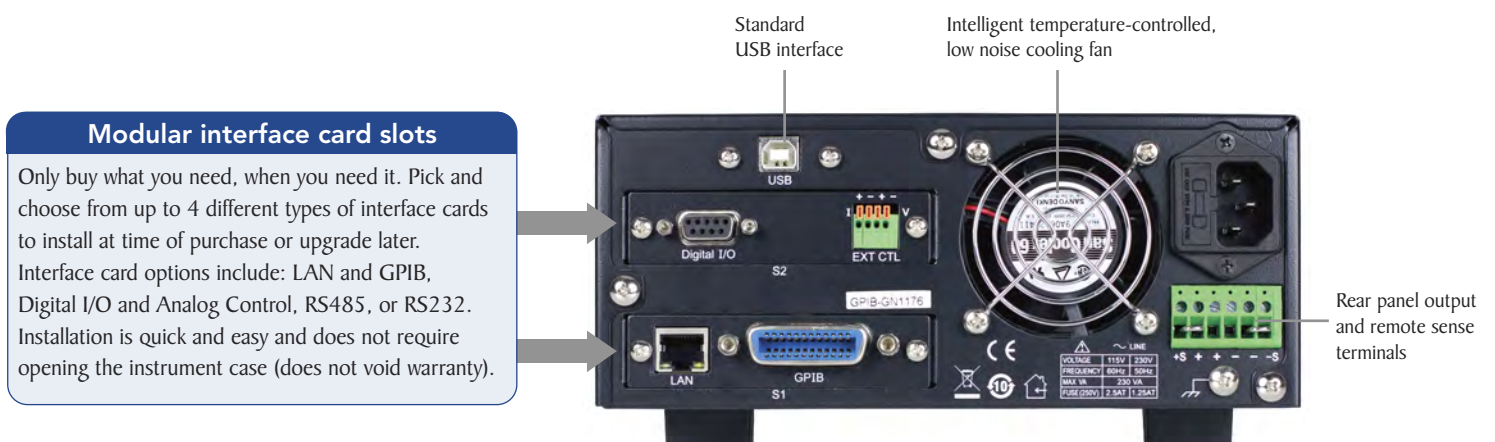

External control and programming

Versatile connectivity

These power supplies offer SCPI IEEE488.2 compatible standard USB, optional GPIB and LAN interfaces, and an optional 8-bit digital I/O and analog control card to facilitate test system development and integration.

Test sequence execution in list mode

The list mode feature allows users to download a list of commands to the power supply's internal memory and execute them. A total of 150 steps can be allocated to one of 10 internal memory locations. The test sequence can be programmed remotely through the included application software or via the USB, GPIB, or LAN interfaces using SCPI commands. Each step's voltage, current, and duration parameters can be set, with sequences configured for single or repeated execution.


External analog programming interface⁽¹⁾

The power supplies' output voltage and current can be controlled by either external analog voltage or resistance. Use a 0-5 V or 0-10 V external DC voltage source, or 0-5 kΩ variable resistor to control the output from zero to full scale.

Application software

Create test sequences for execution in list mode via the GPIB or USB interface using the included PC software.

- Create, save, and load program lists
- View output characteristic curves and export data to a file
- Pass/Fail test monitors maximum and minimum voltage and current values over a specified period of time

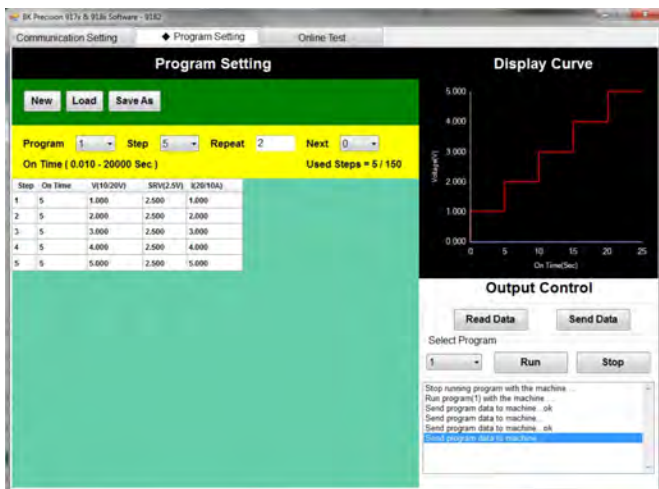


(1) Requires card option DR1DIO or DR2DIO

(2) Requires card option DRGL


(3) Requires card option DRRS485

Web server interface⁽²⁾

The 9170/9180 series power supplies with the GPIB/LAN interface installed provide a built-in Web server that allows users to configure, control, or monitor the basic settings of the power supply from a remote computer using a Java-enabled Web browser. Connect to the user-defined IP address to view the web control page. SCPI commands can also be sent through the Web server interface.

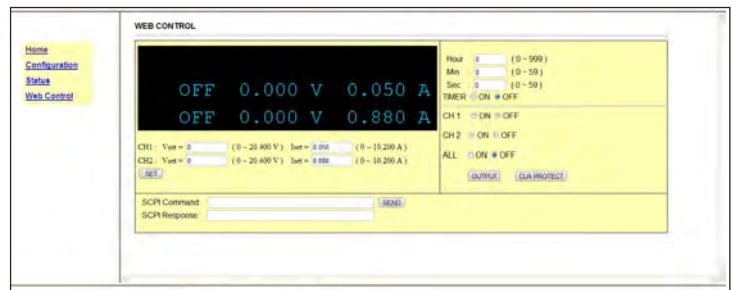

Interface for controlling voltage, current, and output state

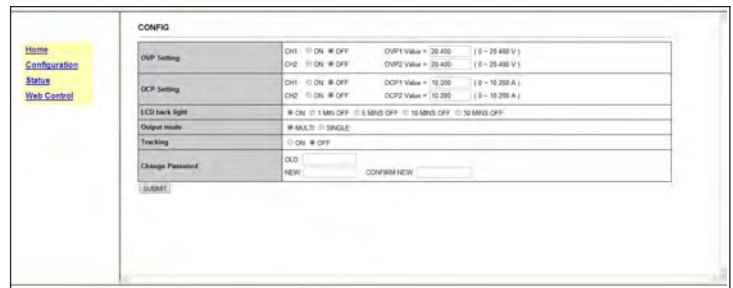

Control settings page for configuration of protection and password settings for the system

Telnet interface⁽²⁾

Power supplies can be controlled with SCPI commands via a Telnet connection over the Ethernet interface. Any computer with a Telnet client can be used to control the power supply.

Multi-unit control⁽³⁾


In multi-unit control mode, up to 31 units can be daisy chained via the RS485 interface for synchronization purposes and controlled from one master unit via the USB, GPIB, or LAN interface.

Test modes for LED and other special applications


To address the growing LED market, the 9170/9180 series design incorporates special LED test modes for efficient and safe electrical tests of LED panels. Powering LEDs with conventional power supplies will potentially cause permanent damage to the UUT or limit its lifespan due to excessive inrush current at power up and the non-linear characteristics of the LED's I-V curve. These power supplies feature two distinct operating modes suitable for LED testing in a manufacturing or R&D environment and other special applications requiring a controlled rise time at power up without generating any inrush current.

LED mode

With LED mode active, inrush current will be eliminated or minimized to protect the UUT.

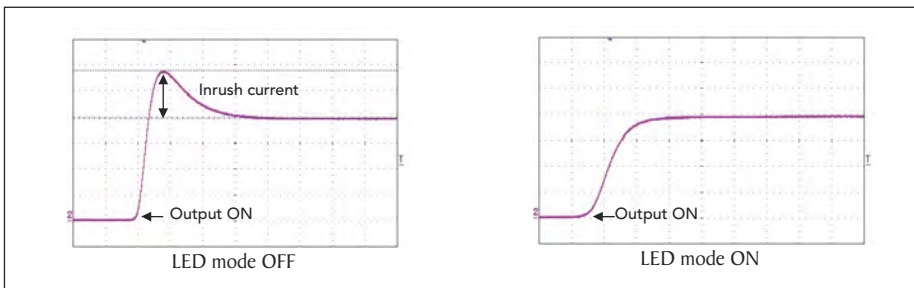


Current flow during power up with LED mode enabled

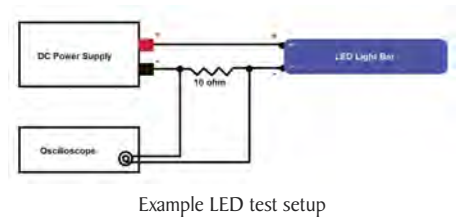

Example LED test setup

Low current mode*

This unique function enables the power supply to minimize the voltage rise time in a controlled manner. This mode is used when operating at a low current (< 1 A) and quick transitions from a high-to-low or low-to-high voltage are needed.

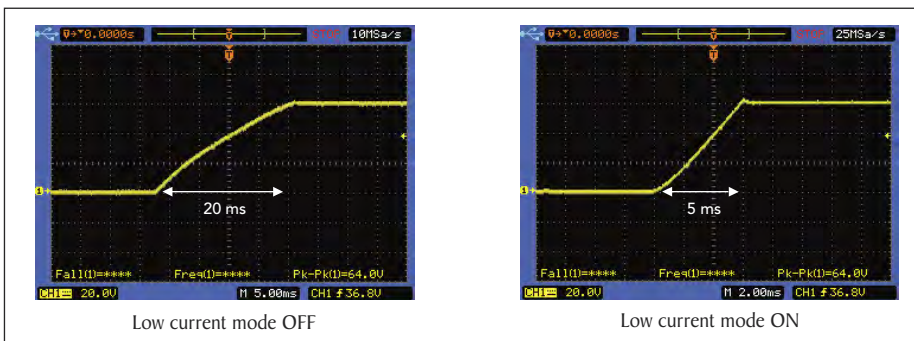

Voltage rise time with and without low current mode enabled

* Low current mode for high voltage models 9184 and 9185 only.

Programmable Dual-Range DC Power Supplies
9170 & 9180 series

Specifications		9171	9172	9173	9174	9181	9182	9183	9184	9185
Output Rating	Low Range	0-10 V, 0-10 A	0-35 V, 0-3 A	0-10 V, 0-10 A	0-35 V, 0-3 A	0-18 V, 0-8 A	0-10 V, 0-20 A	0-35 V, 0-6 A	0-100 V, 0-2 A	0-400 V, 0-0.5 A
	High Range	0-20 V, 0-5 A	0-70 V, 0-1.5 A	0-20 V, 0-5 A	0-70 V, 0-1.5 A	0-36 V, 0-4 A	0-20 V, 0-10 A	0-70 V, 0-3 A	0-200 V, 0-1 A	0-600 V, 0-0.35 A
Number of Channels		1	1	2	2	1	1	1	1	1
Max Output Power		100 W	105 W	200 W	210 W	144 W	200 W	210 W	200 W	210 W
Line Regulation	Voltage	$\leq 0.01\% + 1\text{ mV}$								
	Current	$\leq 0.01\% + 250\text{ }\mu\text{A}$								
Load Regulation ¹	Voltage	$\leq 0.01\% + 1\text{ mV}$								
	Current	$\leq 0.01\% + 250\text{ }\mu\text{A}$								
Ripple and Noise (20 Hz – 20 MHz)	Normal Mode Voltage	$\leq 0.35\text{ mVrms} / \leq 3\text{ mVpp}$	$\leq 0.5\text{ mVrms} / \leq 5\text{ mVpp}$	$\leq 0.35\text{ mVrms} / \leq 3\text{ mVpp}$	$\leq 0.5\text{ mVrms} / \leq 5\text{ mVpp}$	$\leq 0.35\text{ mVrms} / \leq 3\text{ mVpp}$		$\leq 0.5\text{ mVrms} / \leq 5\text{ mVpp}$	$\leq 1.5\text{ mVrms} / \leq 15\text{ mVpp}$	$\leq 4.5\text{ mVrms} / \leq 45\text{ mVpp}$
	Normal Mode Current	$\leq 2\text{ mA rms}$								
	Common Mode Current	$\leq 1.5\text{ }\mu\text{A rms}$								
Programming / Readback Resolution	Voltage	1 mV	2 mV	1 mV	2 mV	1 mV		2 mV	10 mV	20 mV
	Current	1 mA	0.1 mA	1 mA	0.1 mA	1 mA		0.2 mA	0.1 mA	0.01 mA
Programming / Readback Accuracy \pm (% output+offset)	Voltage	$\leq 0.05\% + 5\text{ mV}$	$\leq 0.05\% + 10\text{ mV}$	$\leq 0.05\% + 5\text{ mV}$	$\leq 0.05\% + 10\text{ mV}$	$\leq 0.05\% + 5\text{ mV}$		$\leq 0.05\% + 10\text{ mV}$	$\leq 0.05\% + 50\text{ mV}$	$\leq 0.05\% + 100\text{ mV}$
	Current	$\leq 0.1\% + 2\text{ mA}$	$\leq 0.1\% + 1\text{ mA}$	$\leq 0.1\% + 2\text{ mA}$	$\leq 0.1\% + 1\text{ mA}$	$\leq 0.1\% + 2\text{ mA}$	$\leq 0.1\% + 5\text{ mA}$	$\leq 0.1\% + 2\text{ mA}$	$\leq 0.1\% + 1\text{ mA}$	$\leq 0.1\% + 0.1\text{ mA}$
Temperature Coefficient per °C \pm (% output+offset)	Voltage	$\leq 0.005\% + 1\text{ mV}$							$\leq 0.005\% + 10\text{ mV}$	$\leq 0.005\% + 20\text{ mV}$
	Current	$\leq 0.01\% + 3\text{ mA}$								
Transient Response Time ²		$\leq 50\text{ }\mu\text{s}$ for output to recover to within 15 mV							$\leq 100\text{ }\mu\text{s}$ for output to recover to within 50 mV	$\leq 100\text{ }\mu\text{s}$ for output to recover to within 120 mV
Settling Time ³		$\leq 30\text{ ms}$								
Measurement Time		$\leq 50\text{ ms}$								
OVP Accuracy		$\leq 0.5\% + 0.1\text{ V}$							$\leq 0.5\% + 1\text{ V}$	
OCP Accuracy		$\leq 0.5\% + 0.1\text{ A}$								
OVP/OCP Response Time ⁴		$\leq 1\text{ ms}$								
Rising Time at Full Load / No Load		$\leq 8\text{ ms}$	$\leq 10\text{ ms}$	$\leq 8\text{ ms}$	$\leq 10\text{ ms}$	$\leq 8\text{ ms}$		$\leq 10\text{ ms}$	$\leq 30\text{ ms}$	$\leq 40\text{ ms}$
Falling Time at Full Load		$\leq 8\text{ ms}$	$\leq 10\text{ ms}$	$\leq 8\text{ ms}$	$\leq 10\text{ ms}$	$\leq 8\text{ ms}$		$\leq 10\text{ ms}$	$\leq 30\text{ ms}$	$\leq 40\text{ ms}$
Falling Time at No Load		$\leq 250\text{ ms}$								
Stability (8 hrs) \pm (% output+offset)	Voltage	$\leq 0.02\% + 2\text{ mV}$							$\leq 0.02\% + 10\text{ mV}$	$\leq 0.02\% + 20\text{ mV}$
	Current	$0.1\% + 1\text{ mA}$								

Notes:

- 1 With sense terminal connected.
- 2 Following a change in output current from full load to half load or vice versa.
- 3 Maximum time required for the output voltage to change from 1% to 99% or vice versa after receiving a VOLTage or VSET command via GPIB or USB interface.
- 4 Average time for output to start to drop after OVP/OCP condition occurs.

Programmable Dual-Range DC Power Supplies
9170 & 9180 series

Specifications (cont.)	9171	9172	9173	9174	9181	9182	9183	9184	9185	
Supplemental Characteristics										
Dimensions (W x H x D)	8.3" x 3.4" x 16.3" (210 x 87 x 415 mm)		8.3" x 5.1" x 16.3" (210 x 130.5 x 415 mm)		8.3" x 3.4" x 16.3" (210 x 87 x 415 mm)		8.3" x 5.1" x 16.3" (210 x 130.5 x 415 mm)			
Rack Mount Height	2U		3U		2U		3U			
Weight	17 lbs (7.7 kg)		23.1 lbs (10.5 kg)		17 lbs (7.7 kg)		26.4 lbs (12 kg)		24.2 lbs (11 kg)	23 lbs (10.5 kg)
Safety	EN61010-1:2001, EU Low Voltage Directive 2006/95/EC									
Electromagnetic Compatibility	Meets EMC Directive 2004/108/EC, EN61326-1:2006									
Standard Interface	USB									
Power Requirements	115/230 VAC ± 10%, 47 Hz - 63 Hz									
Environmental										
Operating Temperature	0 °C - 40 °C, < 75% R.H.									
Storage Temperature	-10 °C - 70 °C, < 85% R.H.									
Three Year Warranty										
Accessories Included	User manual, AC power cord, USB cable (type A to type B), line fuse, certificate of calibration and test report									

Note: All specifications apply to the unit after a temperature stabilization time of 15 minutes over an ambient temperature range of 23 °C ± 5 °C.

Order information for instrument options

Interface cards	Description
DRGL	GPIO/LAN card
DR1DIO	Single channel digital I/O and analog control card
DR2DIO	Dual channel digital I/O and analog control card
DRRS485	RS485 interface card
DRRS232	RS232 interface card

Single channel models: 9171, 9172, 9181, 9182, 9183, 9184, 9185

Dual channel models: 9173, 9174

Rackmount kits	Description
DRRM2U1	Rackmount kit for one 2U instrument
DRRM2U2	Rackmount kit for two 2U instruments mounted side by side
DRRM3U1	Rackmount kit for one 3U instrument
DRRM3U2	Rackmount kit for two 3U instruments mounted side by side

2U size models: 9171, 9172, 9181

3U size models: 9173, 9174, 9182, 9183, 9184, 9185

Interface Card Options




LAN/GPIB card



RS485 card



RS232 card

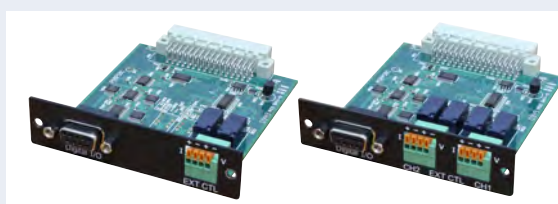

Single and dual channel digital I/O and analog input control cards

Note: All options can be installed by the user and purchased at any time, either together with the instrument or after.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru