Mallory Sonalert Products, Inc. Sales Outline Drawing


Part #: SC616WXYR

Revision: D

Specifications:		
Sound Level Category	Medium	
Mode of Operation	5 Functions: Continuous -, Slow Pulse @0.5 - 2.5 PPS - High or low Frequency, Warble	
Voltage Rating	6 to 16 VDC	
Frequency	Low -1750 ± 500 Hz, High - 2900 ± 500 Hz	
Loudness @ 2 FT	62 to 81 dB(A) Typ.	
Loudness @ Min Vdc	60 dB(A) @ 2 Feet and 6 Vdc	
Loudness @ Max Vdc	69 dB(A) @ 2 Feet and 16 Vdc	
Current Draw	6-27mA	
Duty Cycle (%)	50	
Housing Material	6/6 Nylon, Color: Black	
Storage Temperature	-40° to +85° C	
Operating Temperature	-30° to +65° C	
Panel Mounting	Recommended hole size is 1.25"(31.75mm). Thread front will fit standard 30mm(1.181") hole.	
Knurled Nut	Used to attach part to panel. The max recommended torque is 10 in-lbs.	
Weight (Typical)	2.1 oz (60g)	
NEMA 3R,4X, & 12	Approved with use of ACC03.	
Options	Please contact factory.	

Dimensions: Inches (mm)

ROHS Compliant

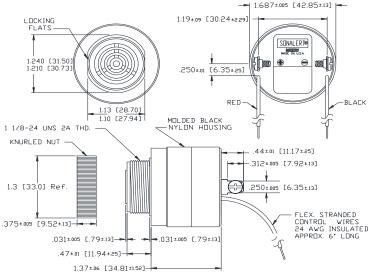

The red and black leads control the several functions. A logic 'Low' is a voltage less than 1/3 of supply voltage. A logic 'High' is a voltage greater than 1/2 supply voltage. A red or black input lead left unconnected is considered an open state.

Truth Table

Control Wire		Function
Red	Black	Mode
High	Low	Off
Open	High	High Continuus
Open	Low	Low Continuous
High	Open	High Pulse
Low	Open	Low Pulse
Open	Open	Warble

NOTE A: TERMINALS-0.32 BRASS TIN PLATED, TAPPED FOR #6-32 SCREW. TWO #6-32 NICKEL PLATED BRASS SCREWS INCLUBED. WILL ACCEPT 1/4' DUICK CONNECT.

NOTE B: MOUNTING- REMOVE BLACK PLASTIC NUT AND INSERT THREADED FROMT THROUGH LEGGLE PUNCHED IN PANEL, IF DRIENTATION IS NEEDED, NOTE LOCKING FLATS IN DRAWING SCREW NUT BACK OUICK CONNECT.



OOO «ЛайфЭлектроникс" "LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 P/C 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 3010181090000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный) Email: org@lifeelectronics.ru