


160 Series Fuse and Clip Assembly



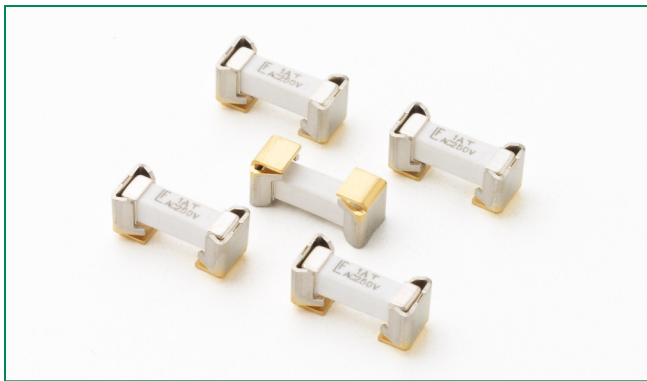

Description

The 160 Series product is a metal fuse clip with pre-installed Littelfuse 443 Series Fuse. This fuse and clip combination can be automatically installed in PC Boards in one efficient manufacturing operation. It permits quick and easy fuse replacement without exposing the PC Boards and other components to risks of rework solder heat as required with direct surface mount fuses.

It is designed to enable compliance with the RoHS directive. This product is fully compatible with lead-free solder alloy and higher temperature profiles associated with lead-free assembly.

Agency Approvals

| AGENCY | AGENCY FILE NUMBER | AMPERE RANGE |
|---|--------------------|----------------|
|  | NBK290416-JP1021 | 1.00A – 5.00A* |
|  | E14721 | 0.5A - 5A |

Note * - PSE/METI Certification is only applicable to the fuse. Clips do not require certification for the Japanese Market.

Electrical Characteristics for Series

| % of Ampere Rating | Opening Time |
|--------------------|----------------------|
| 100% | 4 hours, Minimum |
| 250% | 120 seconds, Maximum |

Additional Information



Datashheet



Resources



Samples



Features

- Offer low profile easily-replaceable fuse alternative compatible with automated PCB surface mount equipment
- Comes supplied with Littelfuse 443 Series 250V Nano²® Fuse
- RoHS compliant and Halogen Free
- Clip fully compatible with RoHS/lead-free solder alloys and higher temperature profiles associated with lead-free assembly
- 0.5A - 5A ampere rating available

Applications

- AC/DC power adaptor
- Telecom equipment system power
- Portable system built-in AC/DC converter
- High voltage DC/DC converter
- Lighting System
- LED Lighting


Electrical Specifications by Item

| Ampere Rating (A) | Amp Code | Max Voltage Rating (V) | Interrupting Rating | Nominal Cold Resistance (Ohms) | Nominal Melting I ² t (A ² sec) | Nominal Voltage Drop (mV) | Agency Approvals | |
|-------------------|----------|------------------------|---------------------|--------------------------------|---|---------------------------|---|---|
| | | | | | | |  |  |
| 0.50 | 0.50 | 250 | 50 A @ 250 VAC | .5974 | 1.96 | 334 | | X |
| 0.75 | 0.75 | 250 | | .2729 | 3.025 | 223 | | X |
| 1.00 | 001. | 250 | | .1826 | 9.00 | 207 | X | X |
| 1.50 | 01.5 | 250 | | .1100 | 15.21 | 210 | X | X |
| 2.00 | 002. | 250 | | .0511 | 18.50 | 117 | X | X |
| 2.50 | 02.5 | 250 | | .0392 | 22.20 | 156 | X | X |
| 3.00 | 003. | 250 | | .0276 | 59.29 | 103 | X | X |
| 3.50 | 03.5 | 250 | | .0199 | 59.34 | 87 | X | X |
| 4.00 | 004. | 250 | | .0160 | 122.5 | 83 | X | X |
| 5.00 | 005. | 250 | | .0115 | 180.6 | 73 | X | X |

Notes:

1. Cold resistance measured at less than 10% of rated current at 23°C.
2. Agency Approval Table Key: X=Approved or Certified, P=Pending.


Temperature Re-rating Curve

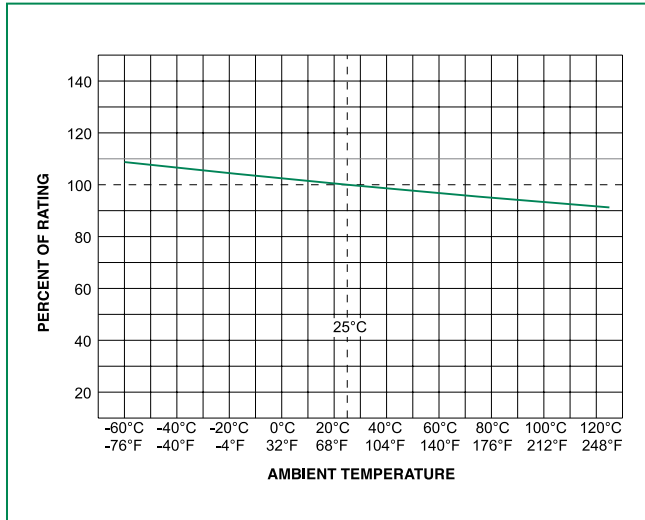

Note:


1. Rerating depicted in this curve is in addition to the standard derating of 25% for continuous operation.

Average Time Current Curves

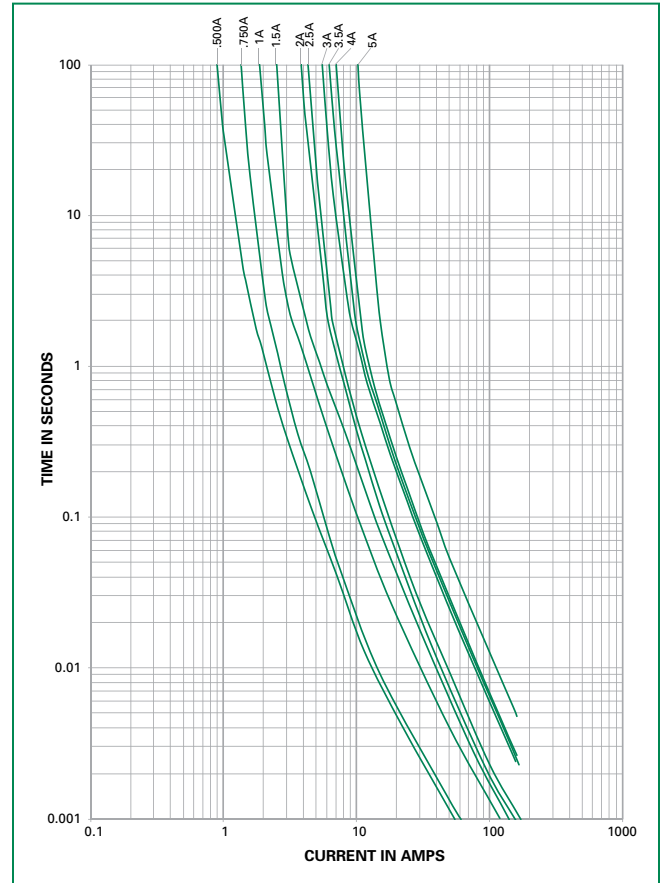

Soldering Parameters

| | | |
|--|------------------------------------|------------------|
| Reflow Condition | Pb-free assembly | |
| Pre Heat | - Temperature Min ($T_{s(min)}$) | 150°C |
| | - Temperature Max ($T_{s(max)}$) | 200°C |
| | - Time (Min to Max) (t_s) | 60 – 180 seconds |
| Average Ramp-up Rate (Liquidus Temp (T_L) to peak) | 5°C/second max. | |
| $T_{s(max)}$ to T_L - Ramp-up Rate | 5°C/second max. | |
| Reflow | - Temperature (T_L) (Liquidus) | 217°C |
| | - Temperature (t_L) | 60 – 150 seconds |
| Peak Temperature (T_p) | 260 ^{+0/-5} °C | |
| Time within 5°C of actual peak Temperature (t_p) | 20 – 40 seconds | |
| Ramp-down Rate | 5°C/second max. | |
| Time 25°C to peak Temperature (T_p) | 8 minutes max. | |
| Do not exceed | 260°C | |

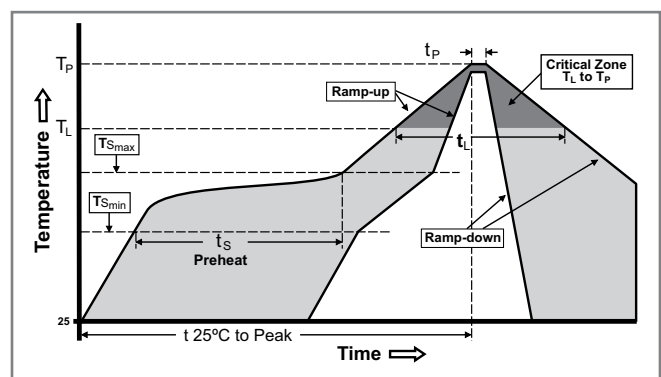


Product Characteristics


| | |
|---|--|
| Materials | Body: Ceramic Cap: Silver-plated Brass |
| Product Marking | Brand, Ampere Rating, Voltage Rating, UMF Logo |
| Insulation Resistance (after Opening) | MIL-STD-202, Method 302, Test Condition A (10,000 ohms, Minimum) |
| Solderability | MIL-STD-202, Method 208 |
| Resistance to Soldering Heat | MIL-STD-202, Method 210, Test Condition B (10 seconds at 260°C) |
| Moisture Sensitivity Level | Level 1 J-STD-020 |

| | |
|------------------------------|---|
| Operating Temperature | -55°C to 125°C with proper re-rating |
| Thermal Shock | MIL-STD-202, Method 107, Test Condition B (5 cycles, -65°C to 125°C) |
| Vibration | MIL-STD-202, Method 201 (10-55 Hz) |
| Moisture Resistance | MIL-STD-202, Method 106, High Humidity (90-98% RH), Heat (65°C) |
| Salt Spray | MIL-STD-202, Method 101, Test Condition B |
| Mechanical Shock | MIL-STD-202, Method 213, Test Condition I (100 G's peak for 6 msecs.) |


Dimensions

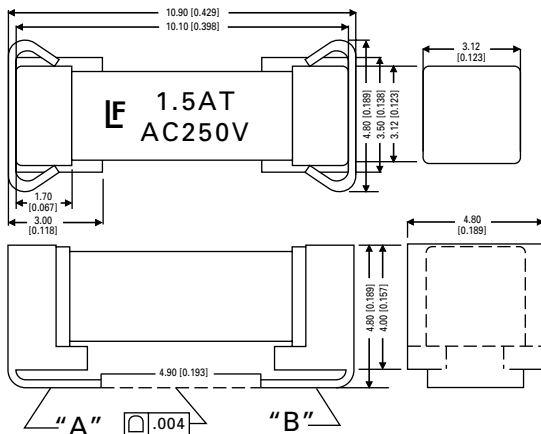

Recommended Pad Layout

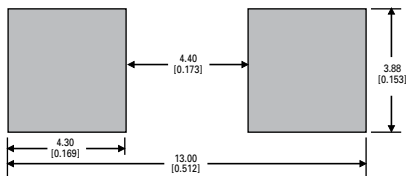

Part Numbering System

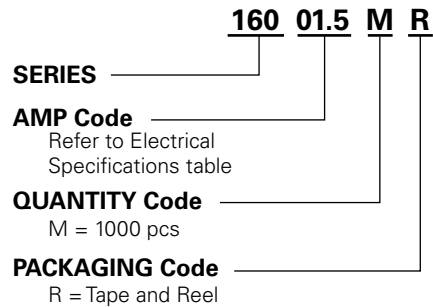

Example:
1.5 amp product is
016001.5 MR

Packaging

| Form Factor | Packaging Option | Packaging Specification | Quantity | Quantity & Packaging Code |
|---------------|--------------------|--------------------------------|----------|---------------------------|
| Surface Mount | 24mm Tape and Reel | EIA-RS 481-2 (IEC 286, part 3) | 1000 | MR |

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru