





LOC	DIST	REVISIONS						
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
			C	REVISED PER ECO-10-018054	04NOV2010	CJV	EJB	
			D	REVISED PER ECO-12-003481	15MAR2012	KS	AC	
			E	REVISED PER ECO-12-005533	31MAR2012	JY	AC	
			F	REVISED PER ECO-14-017735	30EC2014	RG	MC	

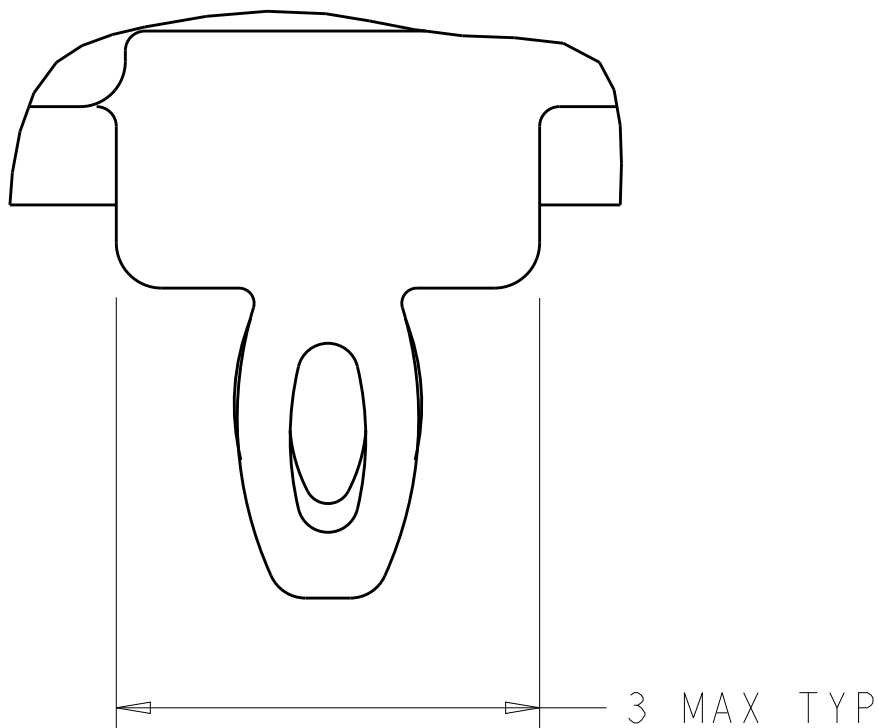

DETAIL S
SCALE 20:1

- 1 CAGE ASSEMBLY MATERIAL: NICKEL SILVER, 0.25 THICK
HEAT SINK MATERIAL: ALUMINUM
HEAT SINK CLIP MATERIAL: STAINLESS STEEL
EMI SPRING MATERIAL: COPPER ALLOY
FRONT FLANGE MATERIAL: ZINC ALLOY
LIGHT PIPE MATERIAL: CLEAR POLYCARBONATE
- 2 PITCH BETWEEN PORTS OF ONE 1X4 CAGE ASSEMBLY.
- 3 SPACING BETWEEN CAGES ON THE SAME PC BOARD, TO BE SPECIFIED BY CUSTOMER, MUST COMPLY WITH MINIMUM DIMENSIONS SHOWN.
- 4 REFERENCE APPLICATION SPEC 114-13218 FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS.
- 5 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 6 DIMENSION F IS THE NOMINAL THICKNESS OF CUSTOMER SUPPLIED PC BOARD, SINGLE SIDED PC BOARD MINIMUM THICKNESS = 1.45mm
DOUBLE SIDED PC BOARD MINIMUM THICKNESS = 2.2mm PER QSFP.
- 7 HEAT SINKS, LIGHT PIPES, AND HEAT SINK CLIPS SHIPPED ASSEMBLED TO CAGE ASSEMBLY. CAGE ASSEMBLY MAY BE PRESSED INTO THE PCB AS SHIPPED.
- 8 DATUM -A- IS TOP SURFACE OF PC BOARD.
- 9 DIMENSION APPLIES WITH MODULE INSERTED IN CAGE.
- 10 UNPLATED THRU HOLE.
11. MATES WITH QSFP MSA COMPATIBLE TRANSCEIVER.
- 12 SURFACE TRACES PERMITTED WITHIN THIS AREA EXCEPT WHERE CAGE STANDOFFS, SHOWN IN DETAIL S, CONTACT PC BOARD.
- 13 BASELINE FOR THESE DIMENSIONS IS THE CENTER OF COMPLIANT PIN HOLE.
- 14 2D BARCODE AND DATE CODE (YYWWDD) MARKED ON SIDE OF CAGE ASSEMBLY.


- 15 REFERENCE APP SPEC 114-13218 FOR GASKET THICKNESS CALCULATION.
- 16 EMI SPRING FINISH: 2µm MINIMUM TIN
FRONT FLANGE FINISH: 3µm MINIMUM TIN OVER 1.27µm MINIMUM NICKEL OVER 5.08µm MINIMUM COPPER.
HEAT SINK FINISH: NICKEL
- 17 HEAT SINKS AND CLIPS SHIPPED ASSEMBLED TO CAGE ASSEMBLY. CAGE ASSEMBLY MAY BE PRESSED INTO THE PCB AS SHIPPED. LIGHT PIPES, SHIPPED UNATTACHED, MUST BE ASSEMBLED BY CUSTOMER AFTER THE CASE IS SEATED IN THE PCB.

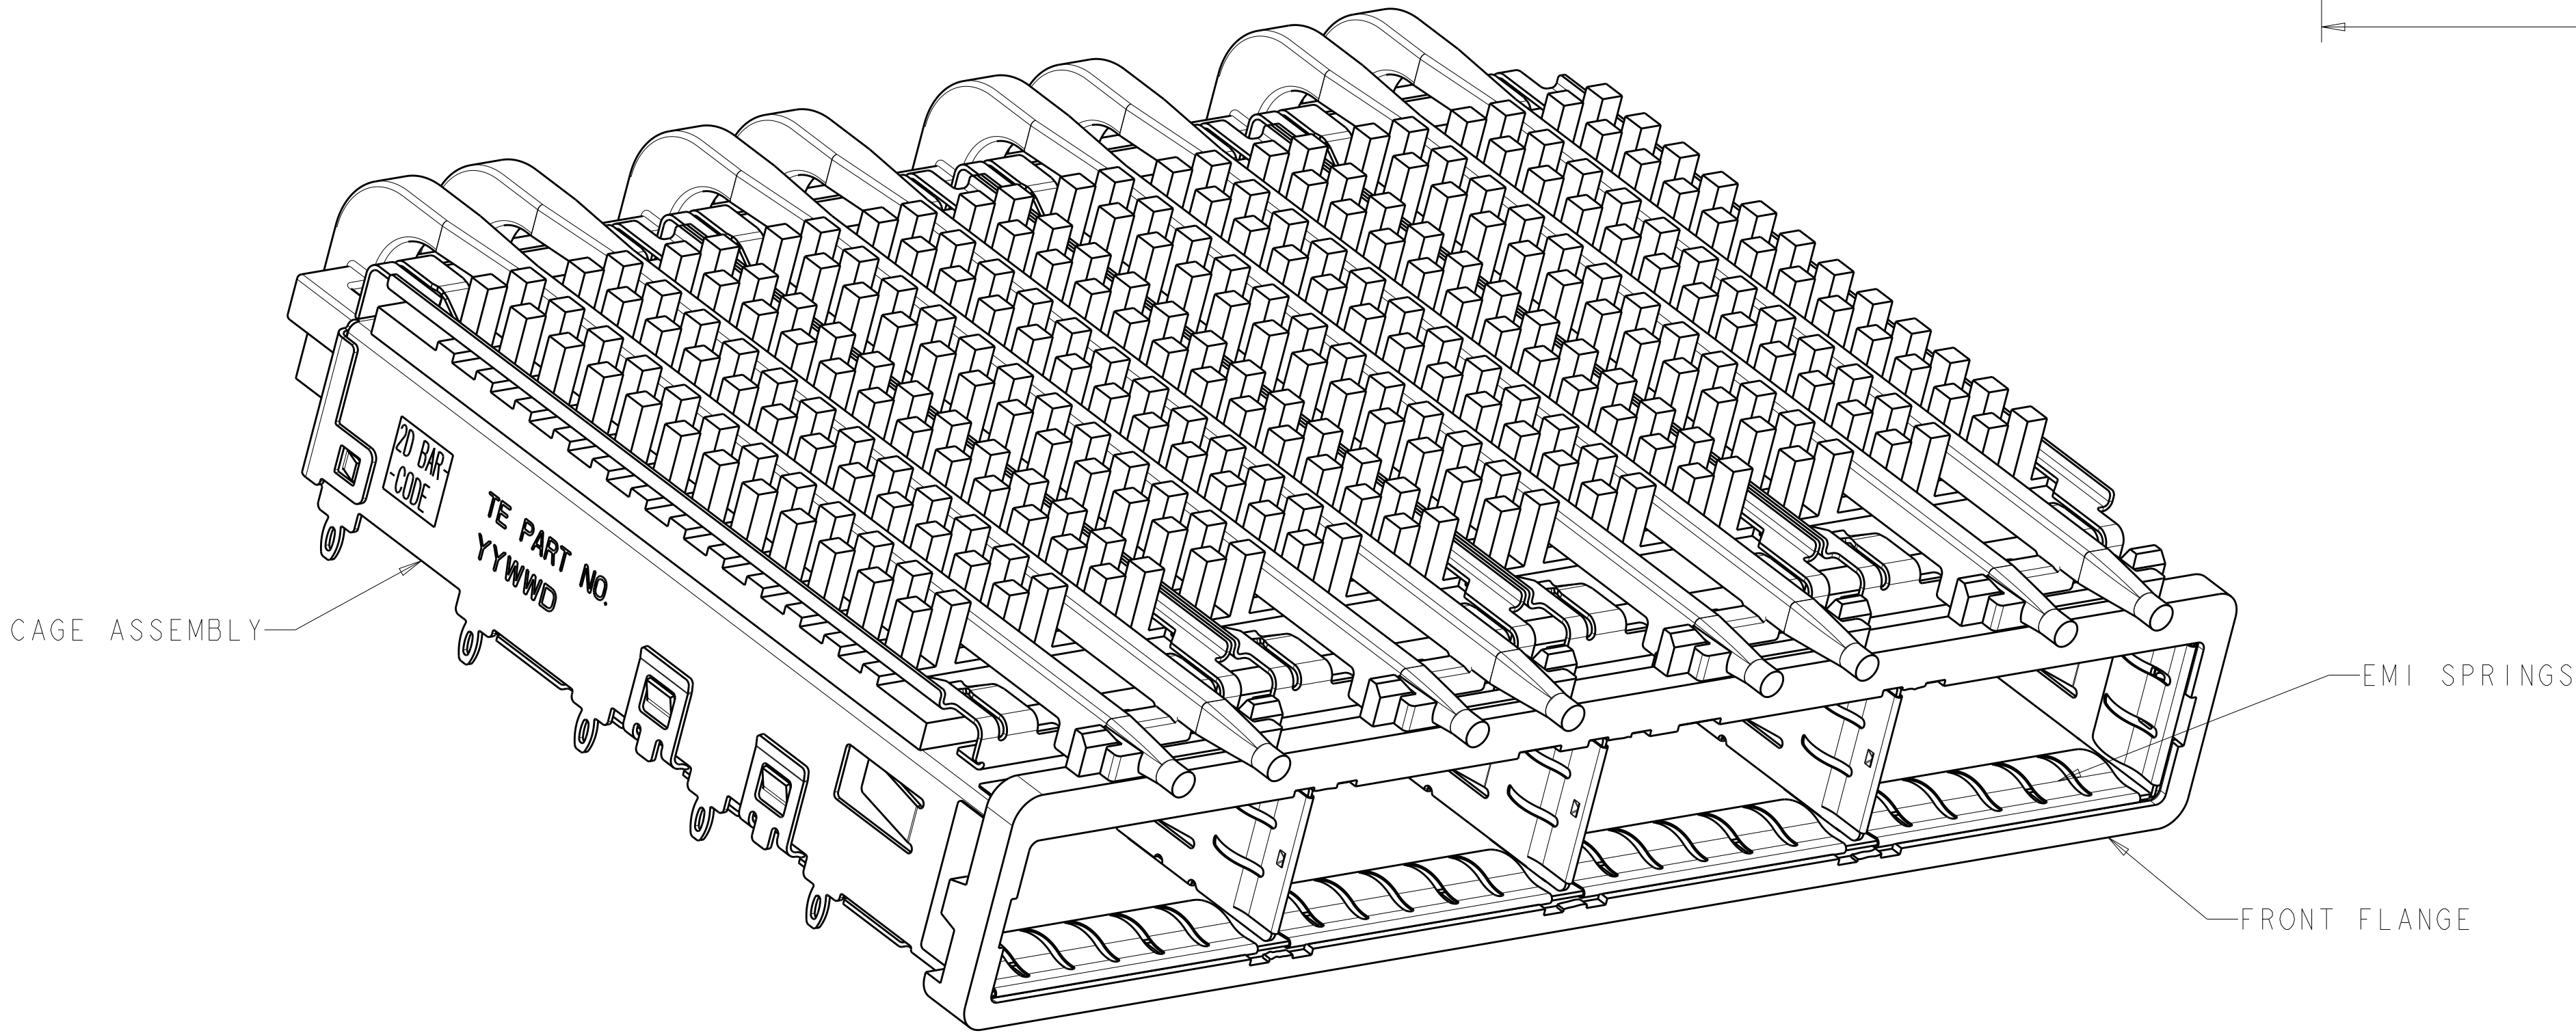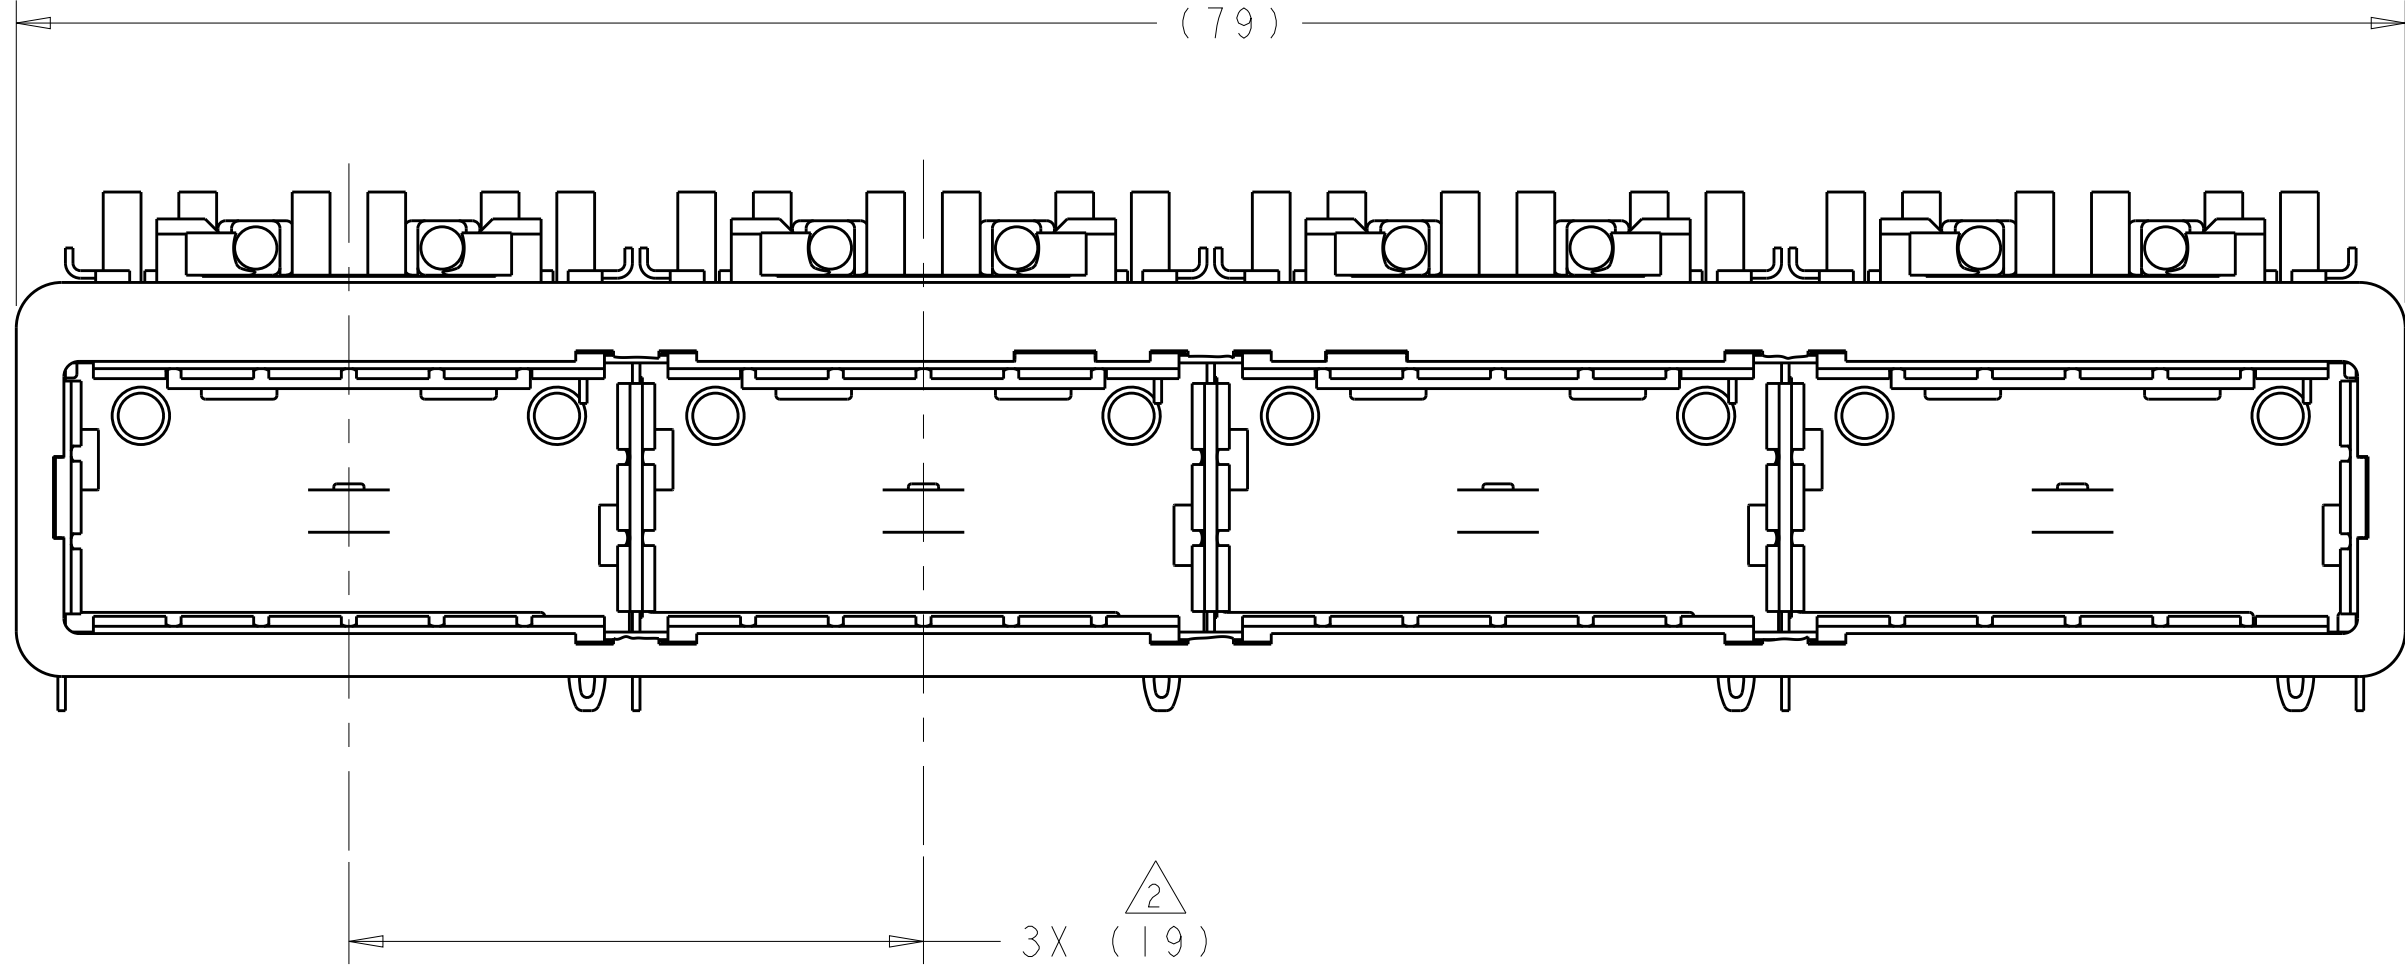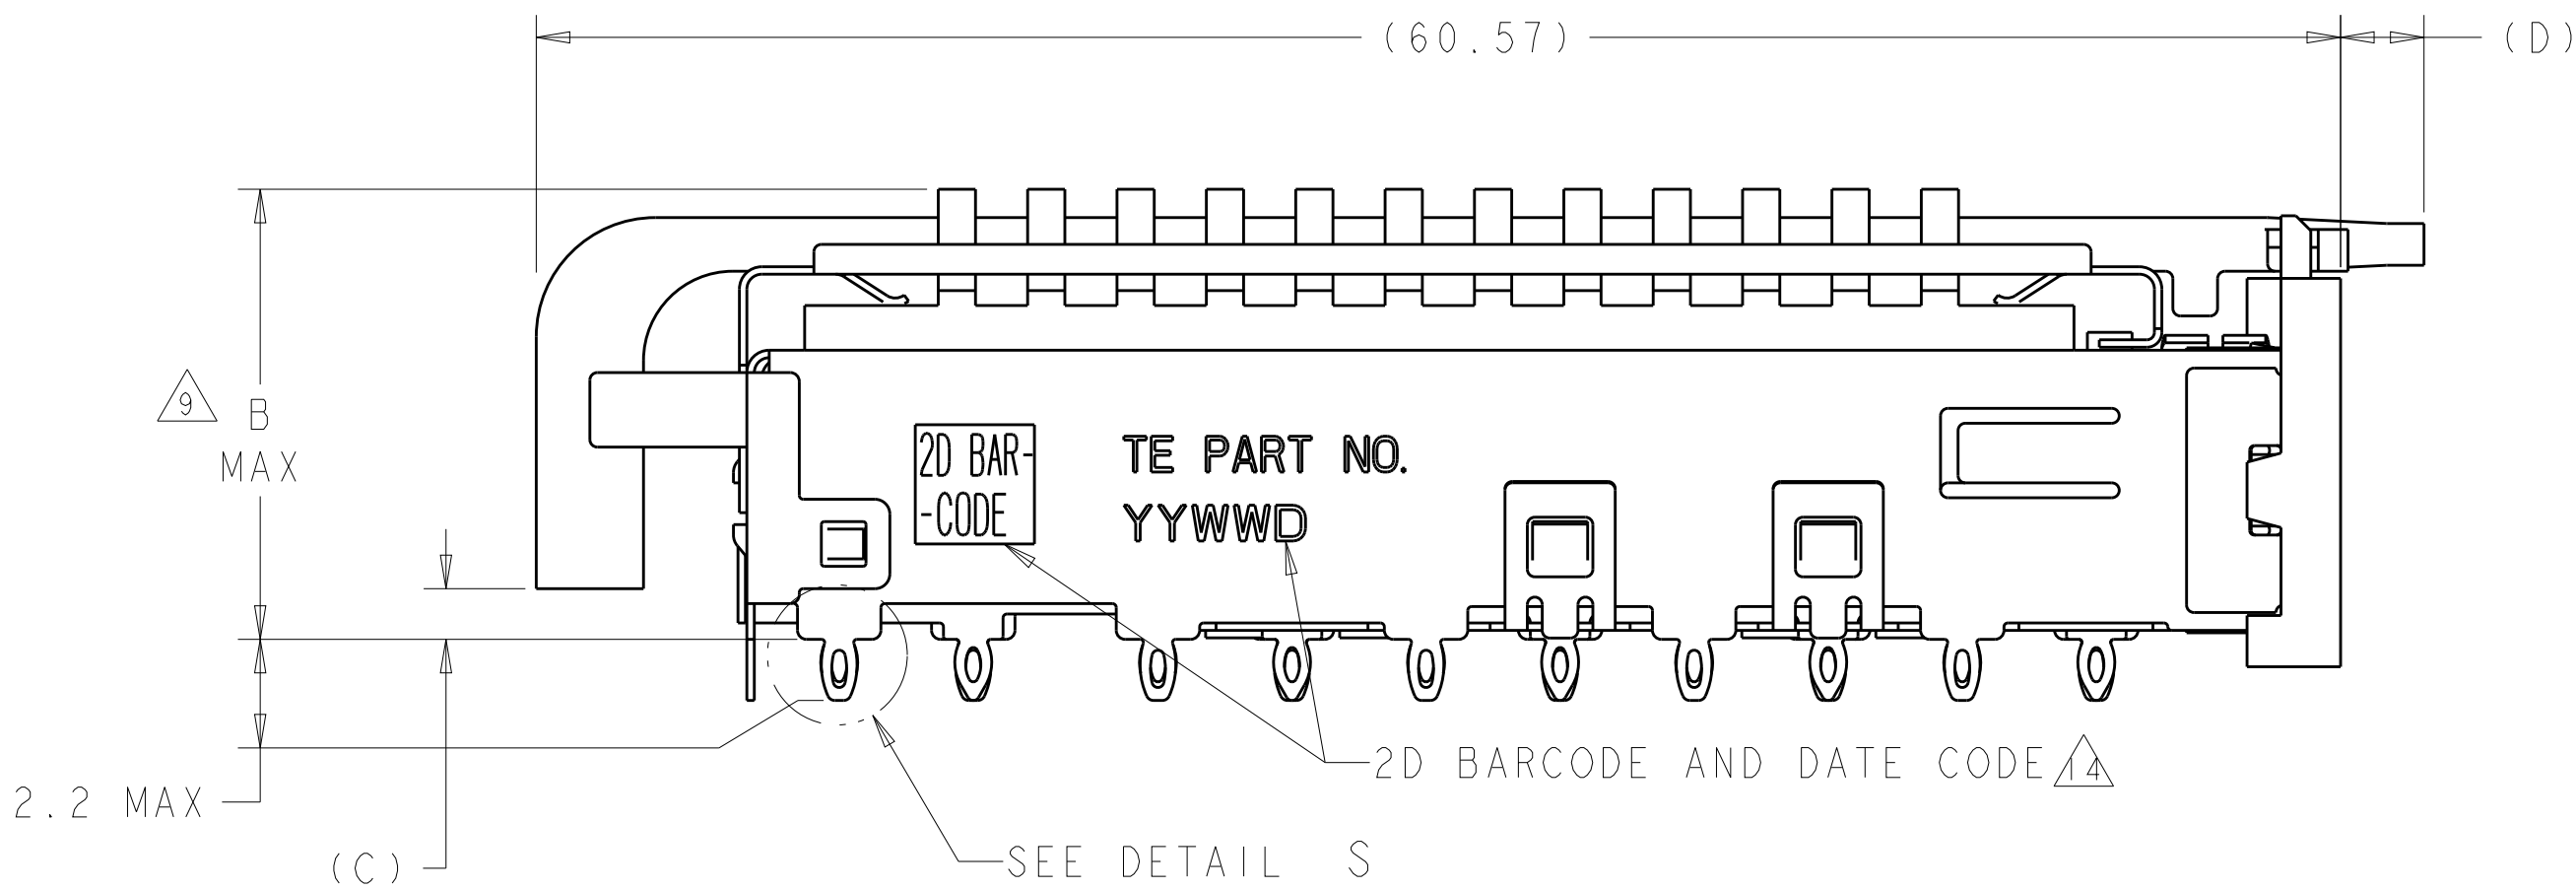

1	1.3-1.4	5.7	2.15	16.0	SAN	2057183-5
1	1.3-1.4	5.7	2.15	13.7	PCI	2057183-4
1	0.8-1.1	2.8	1.70	23.0	NETWORKING	2057183-3
1	0.8-1.1	2.8	1.70	16.0	SAN	2057183-2
1	0.8-1.1	2.8	1.70	13.7	PCI	2057183-1
	E	D	C	B	HEAT SINK PROFILE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. VALENTINE CHK E. BRIGHT APVD F. BRIGHT	01MAY2008 01MAY2008 01MAY2008	NAME 1X4 CAGE ASSEMBLY, BEHIND BEZEL, W/ LIGHT PIPES AND HEAT SINKS, QSFP	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		SIZE A1	
mm		0 PLC ±.1 1 PLC ±0.1 2 PLC ±.1 3 PLC ±.1 4 PLC ±.1 ANGLES ±.1		RESTRICTED TO	
MATERIAL		FINISH		SCALE 4:1	
1		16		SHEET 1 OF 5	
CUSTOMER DRAWING		DRAWING NO. 100779		REV F	

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00	-	-	SEE SHEET 1	-	-	-

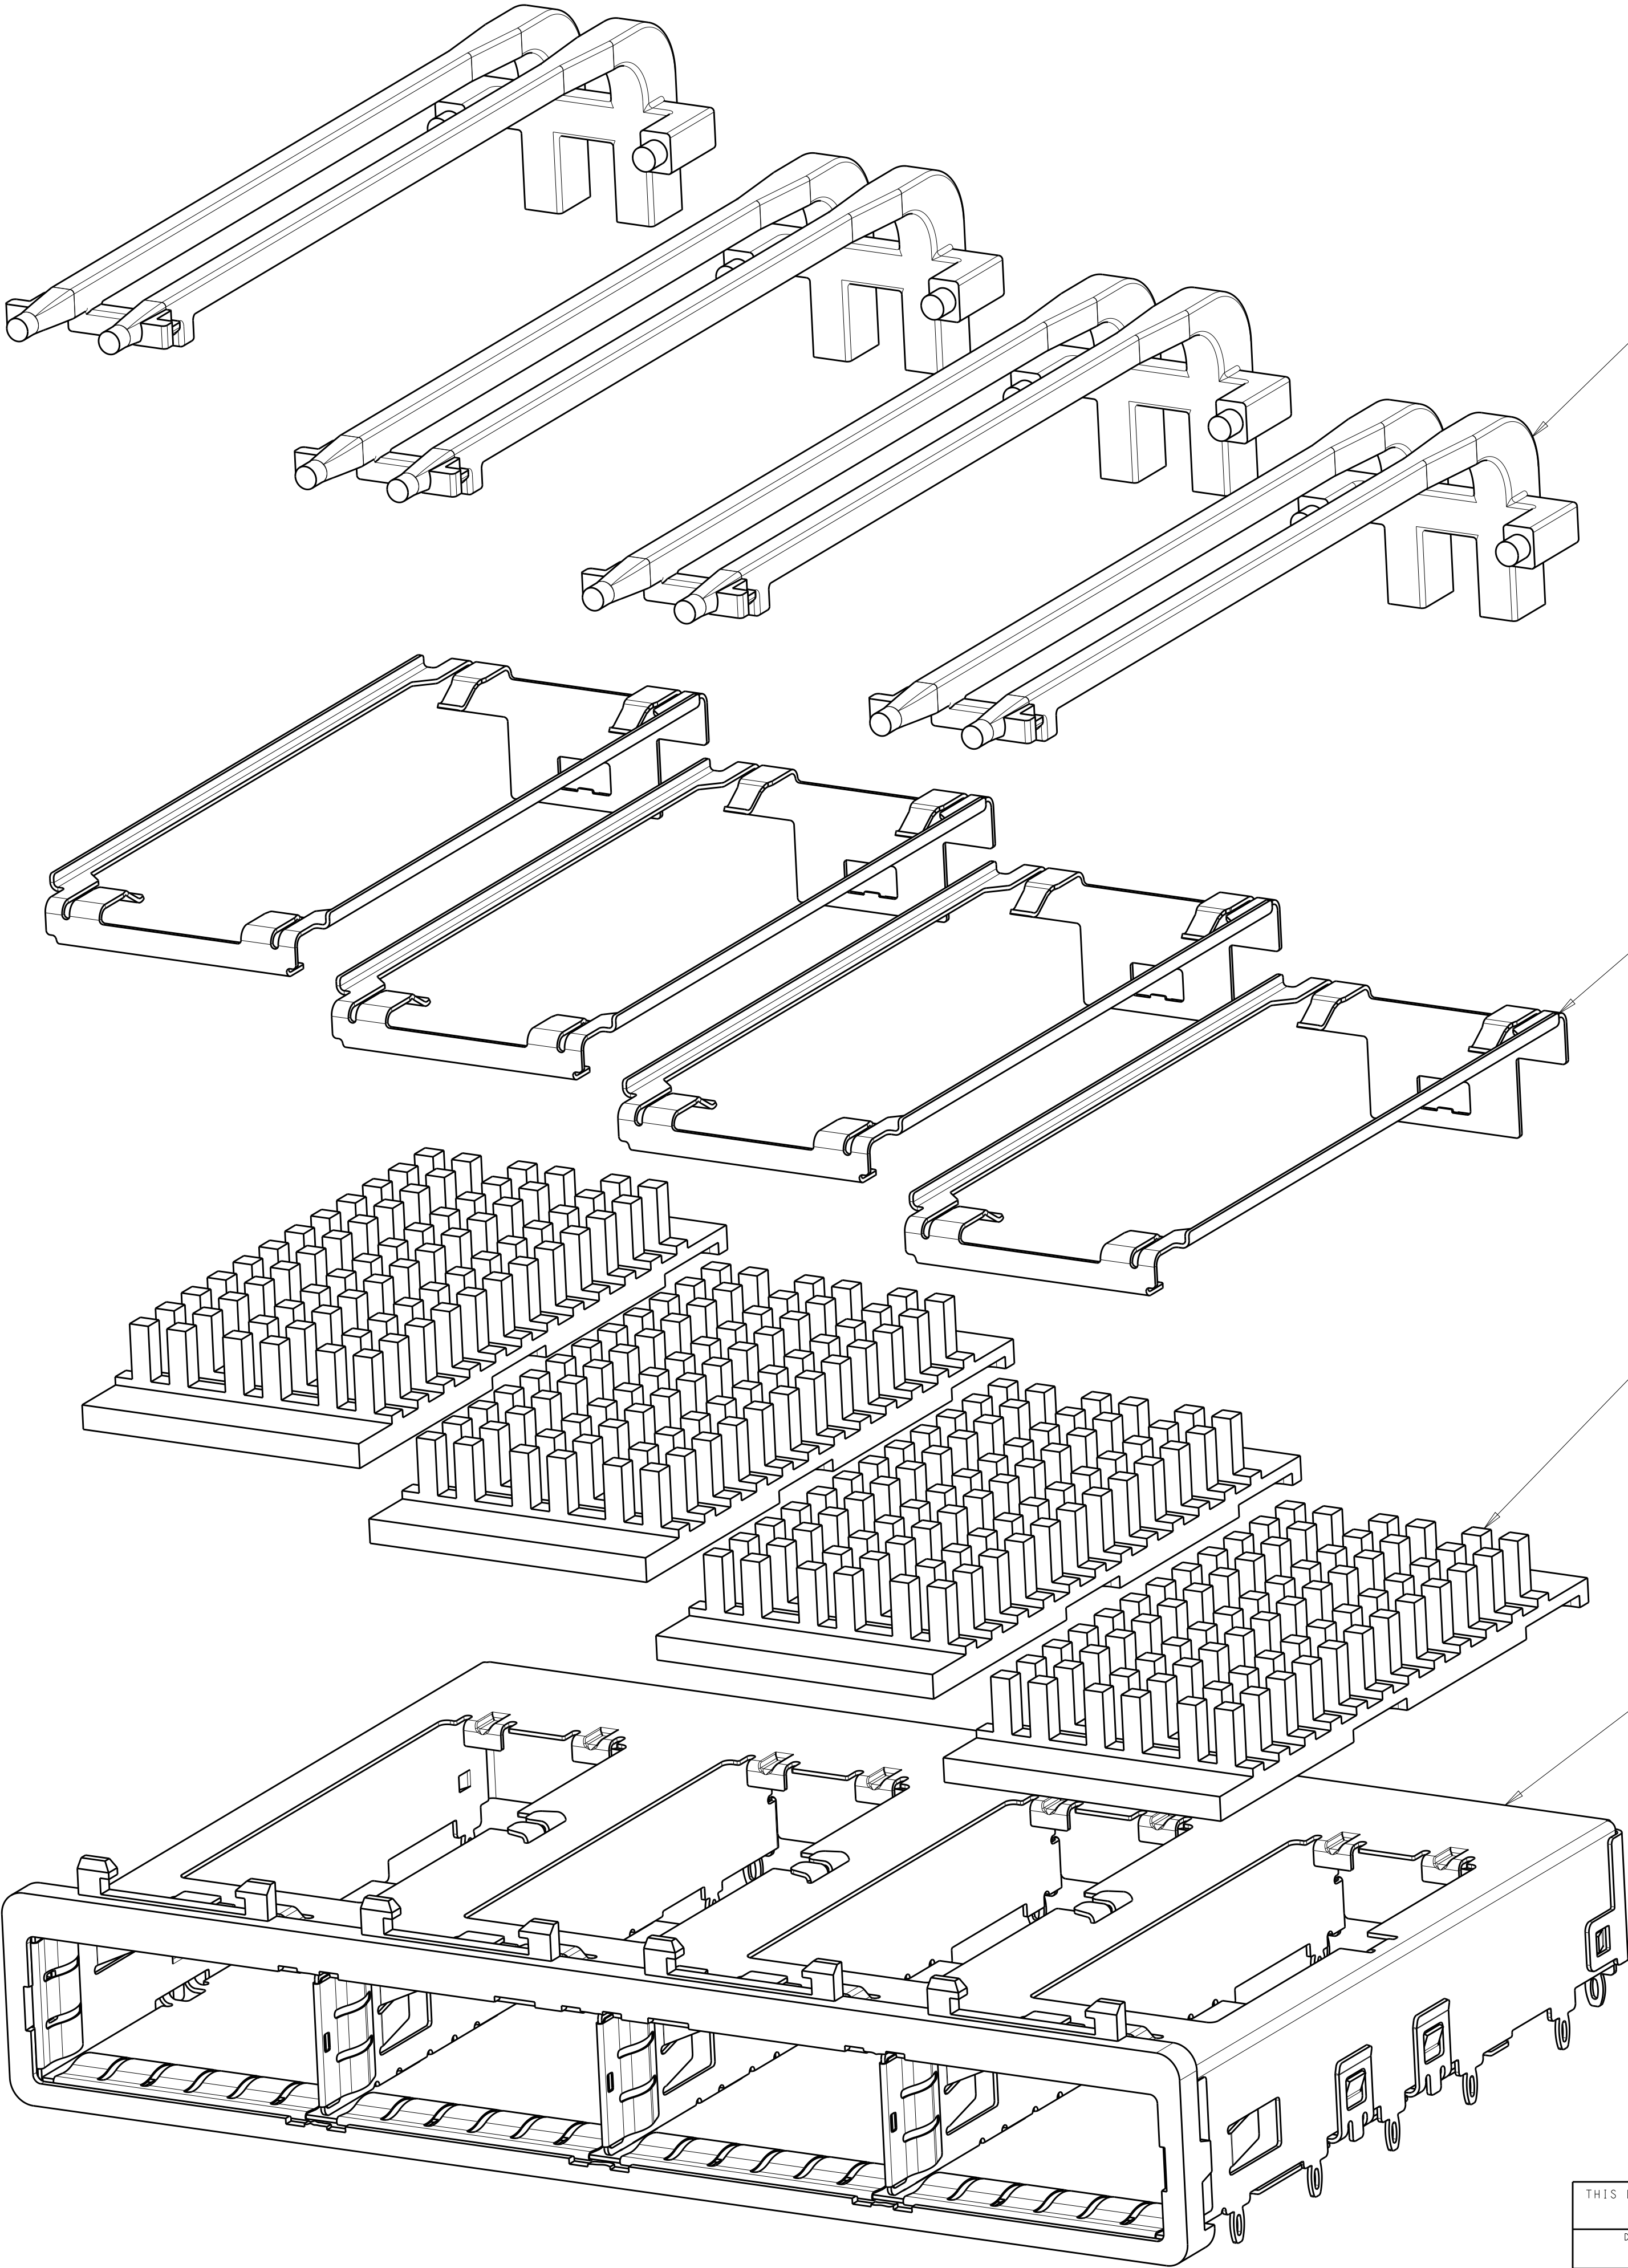

DOUBLE LIGHT PIPES
QUANTITY: 4


HEAT SINK CLIPS
QUANTITY: 4

72 PIN HEAT SINKS
QUANTITY: 4


1X4 BEHIND BEZEL QSFP
CAGE ASSEMBLY
QUANTITY: 1

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN C. VALENTINE	01MAY2008	TE Connectivity	
		CHK E. BRIGHT	01MAY2008		
DIMENSIONS:		APVD F. BRIGHT	01MAY2008	NAME 1X4 CAGE ASSEMBLY, BEHIND BEZEL, W/ LIGHT PIPES AND HEAT SINKS, QSFP	
mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	
		0 PLC	±	APPLICATION SPEC	
		1 PLC	±0.1	108-2286	
		2 PLC	±0.1	114-13218	
		3 PLC	±	WEIGHT	
MATERIAL		4 PLC	±	CUSTOMER DRAWING	
		ANGLES	±	SCALE 4:1	
		FINISH	-	SHEET 2 OF 5	
				REV F	



LOC		DIST		REVISIONS					
GP		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
				-	-	SEE SHEET 1	-	-	-

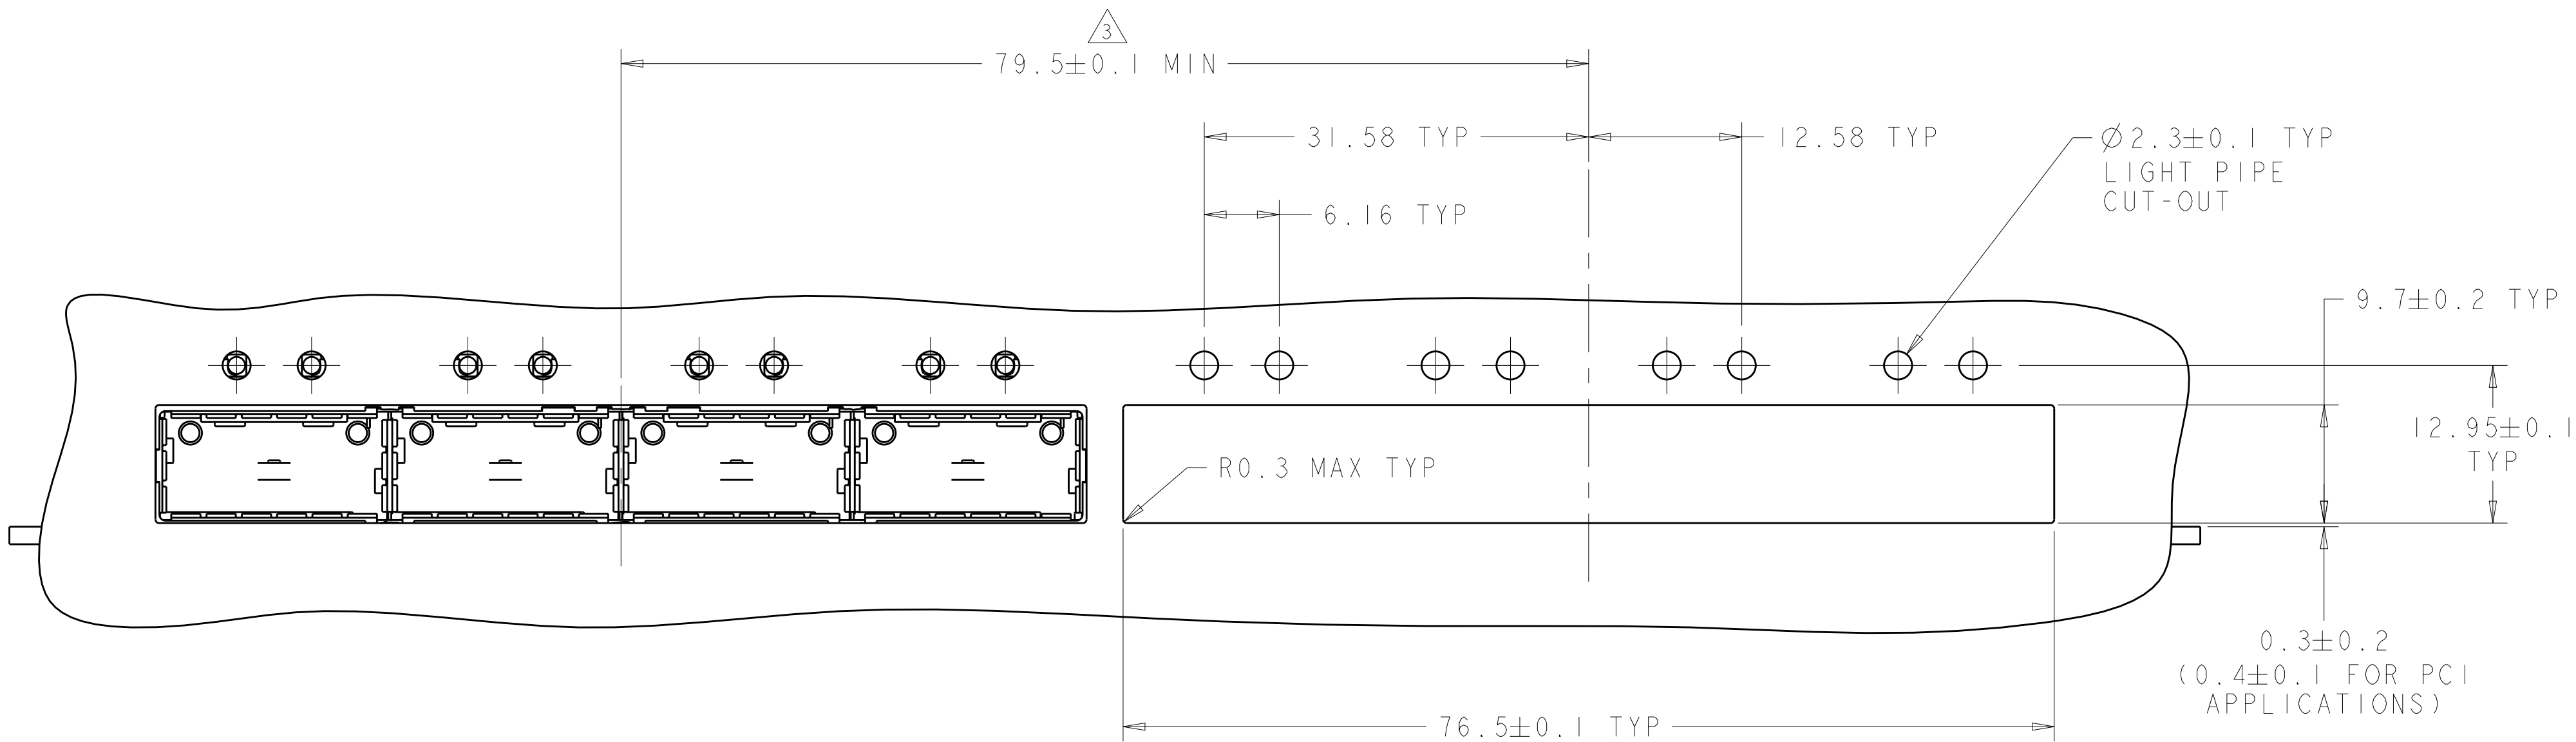


ONE SIDED CONFIGURATION
SCALE 5:2

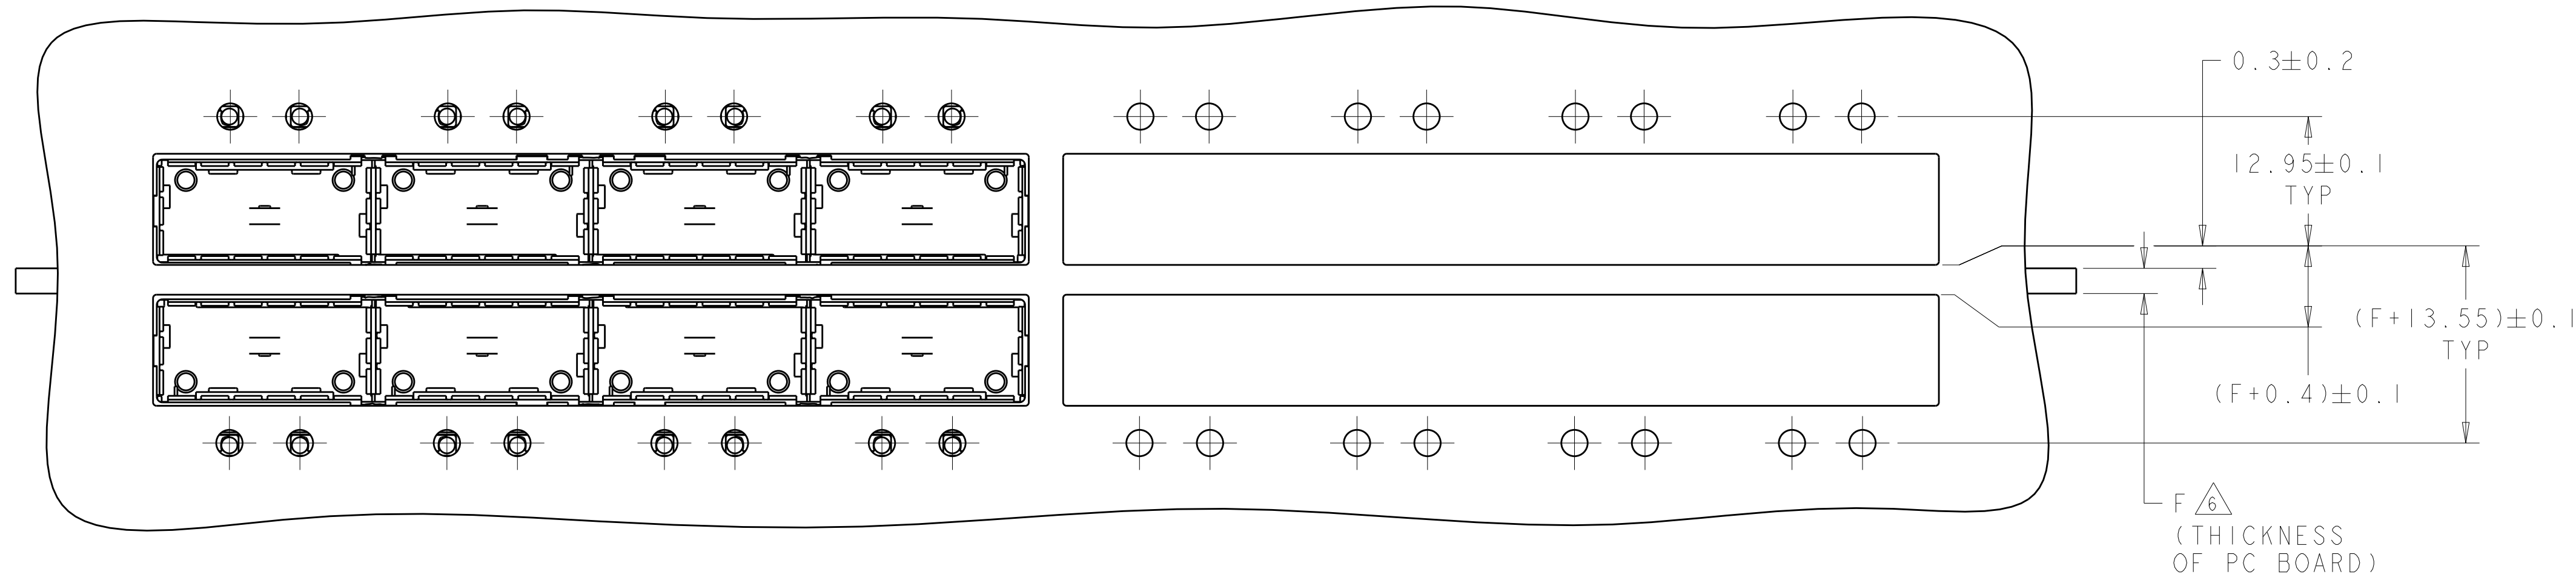


BELLY TO BELLY CONFIGURATION
SIMILAR TO ONE SIDED
EXCEPT WHERE NOTED
SCALE 5:2

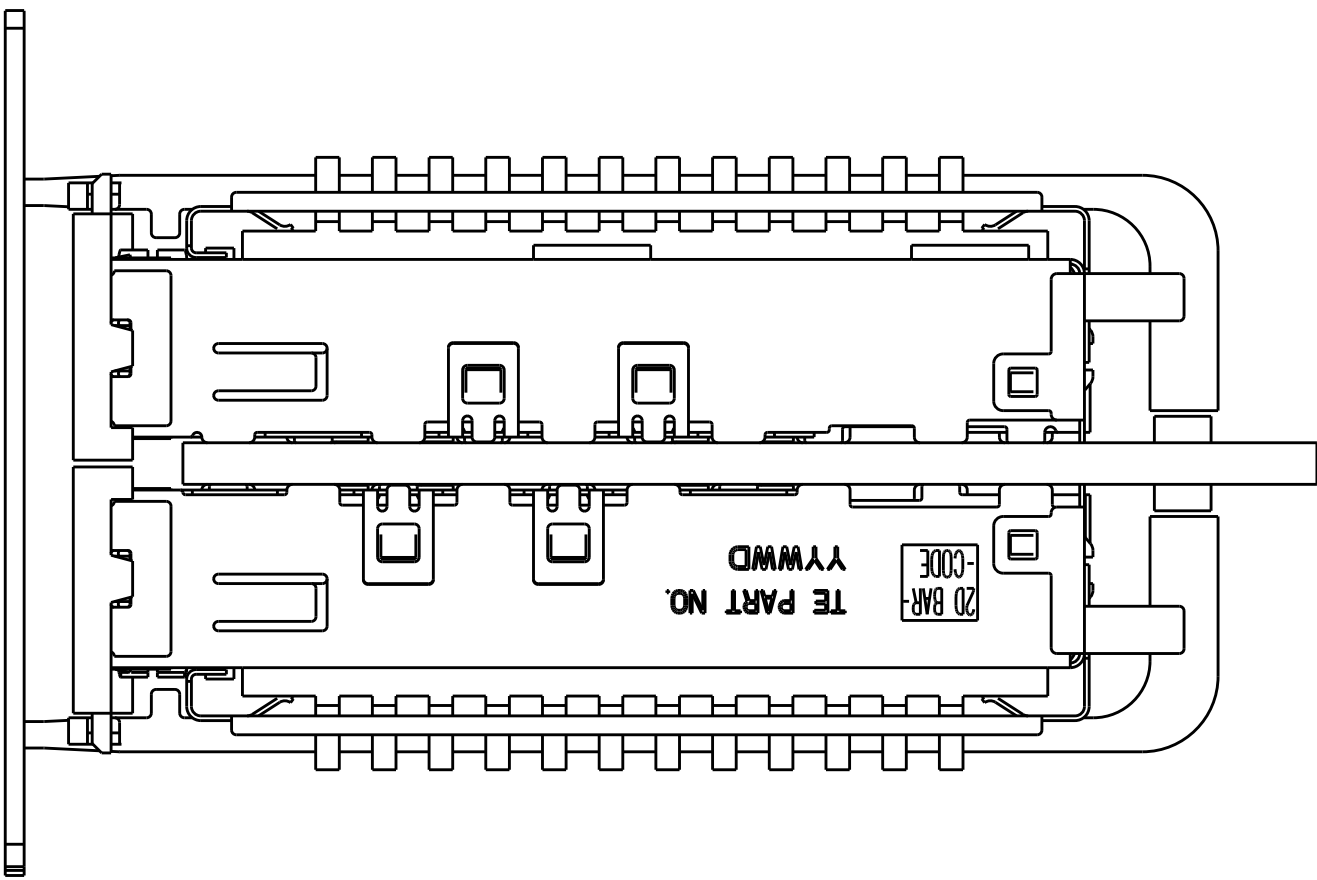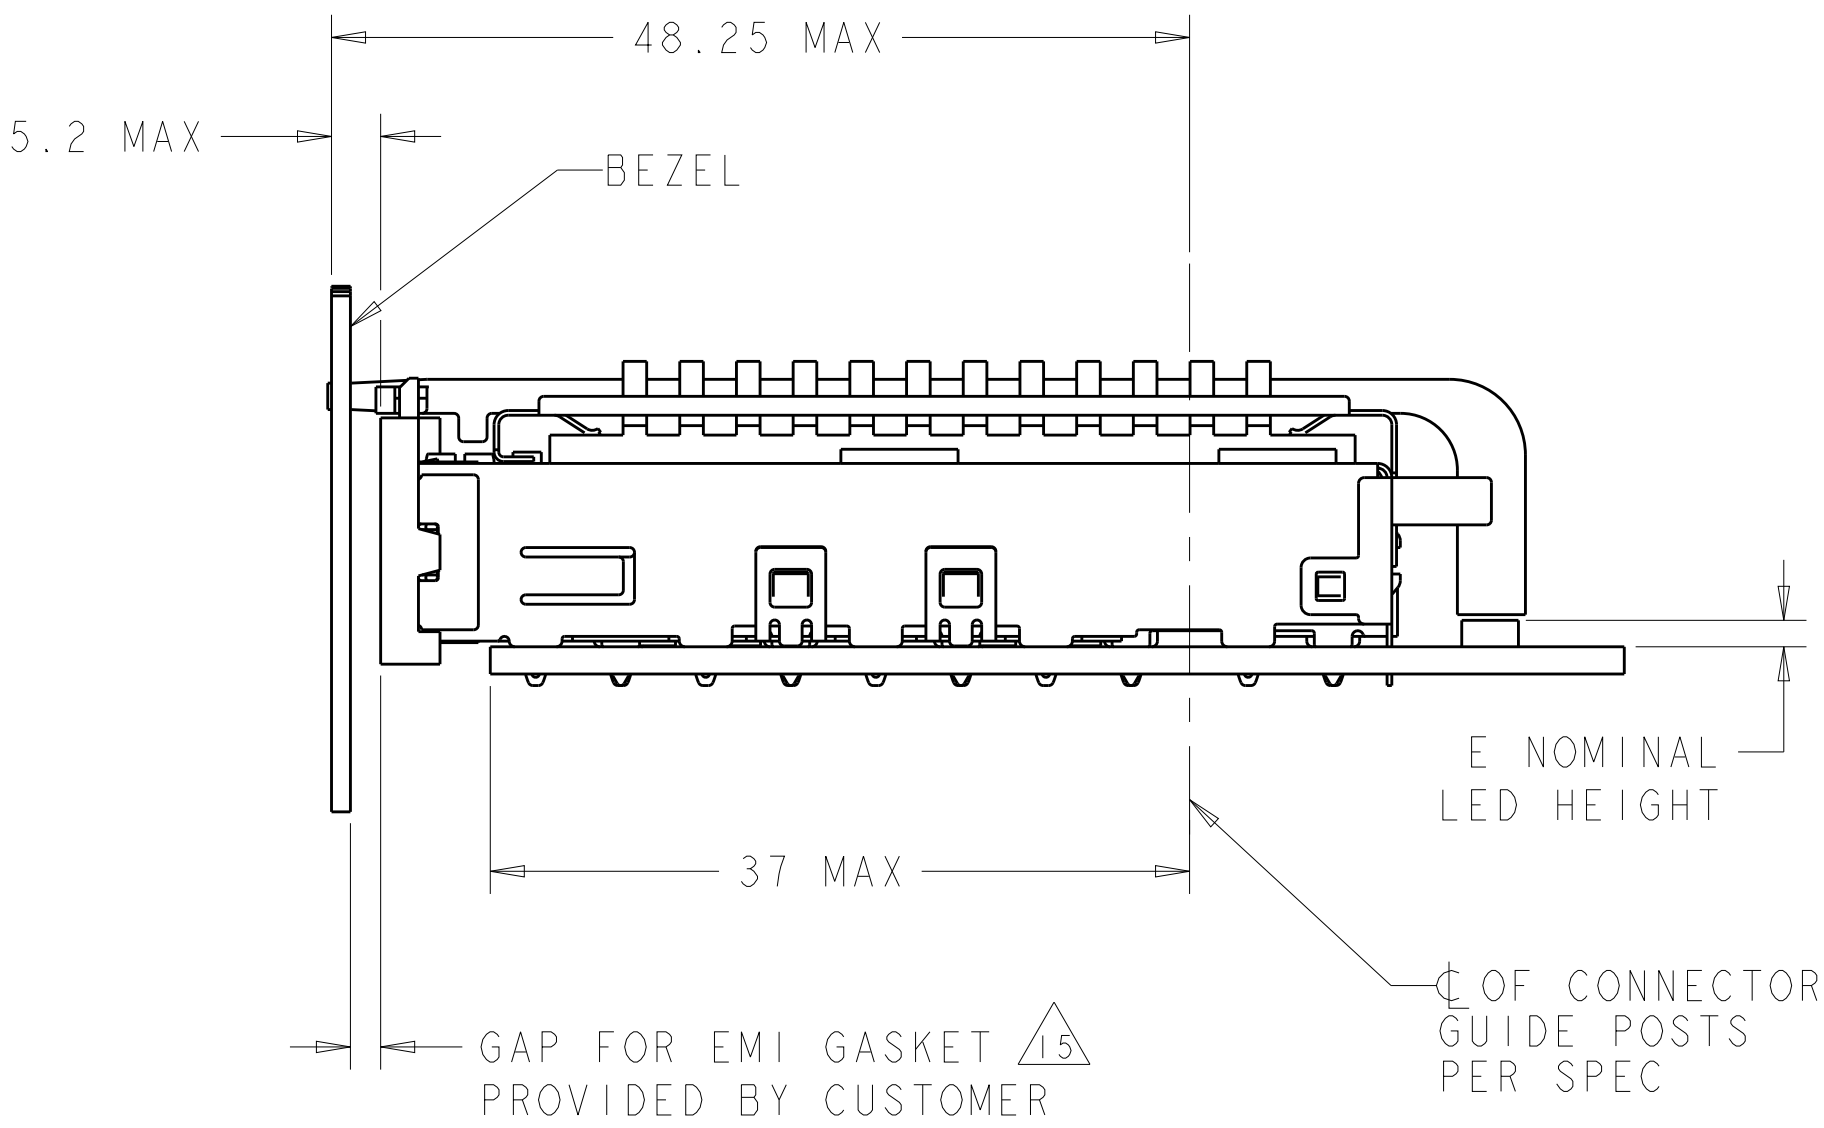

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. VALENTINE 01MAY2008	 TE Connectivity		NAME 1X4 CAGE ASSEMBLY, BEHIND BEZEL, W/ LIGHT PIPES AND HEAT SINKS, QSFP	
DIMENSIONS:		CHK E. BRIGHT 01MAY2008				
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD F. BRIGHT 01MAY2008	PRODUCT SPEC 108-2286		SIZE A1	CAGE CODE C=2057183
	0 PLC ±.1 1 PLC ±0.1 2 PLC ±0.1 3 PLC ±.1 4 PLC ±.1 ANGLES ±.1 FINISH	APPLICATION SPEC 114-13218	WEIGHT			
MATERIAL	-	CUSTOMER DRAWING	SCALE 4:1		SHEET 3 OF 5	REV F

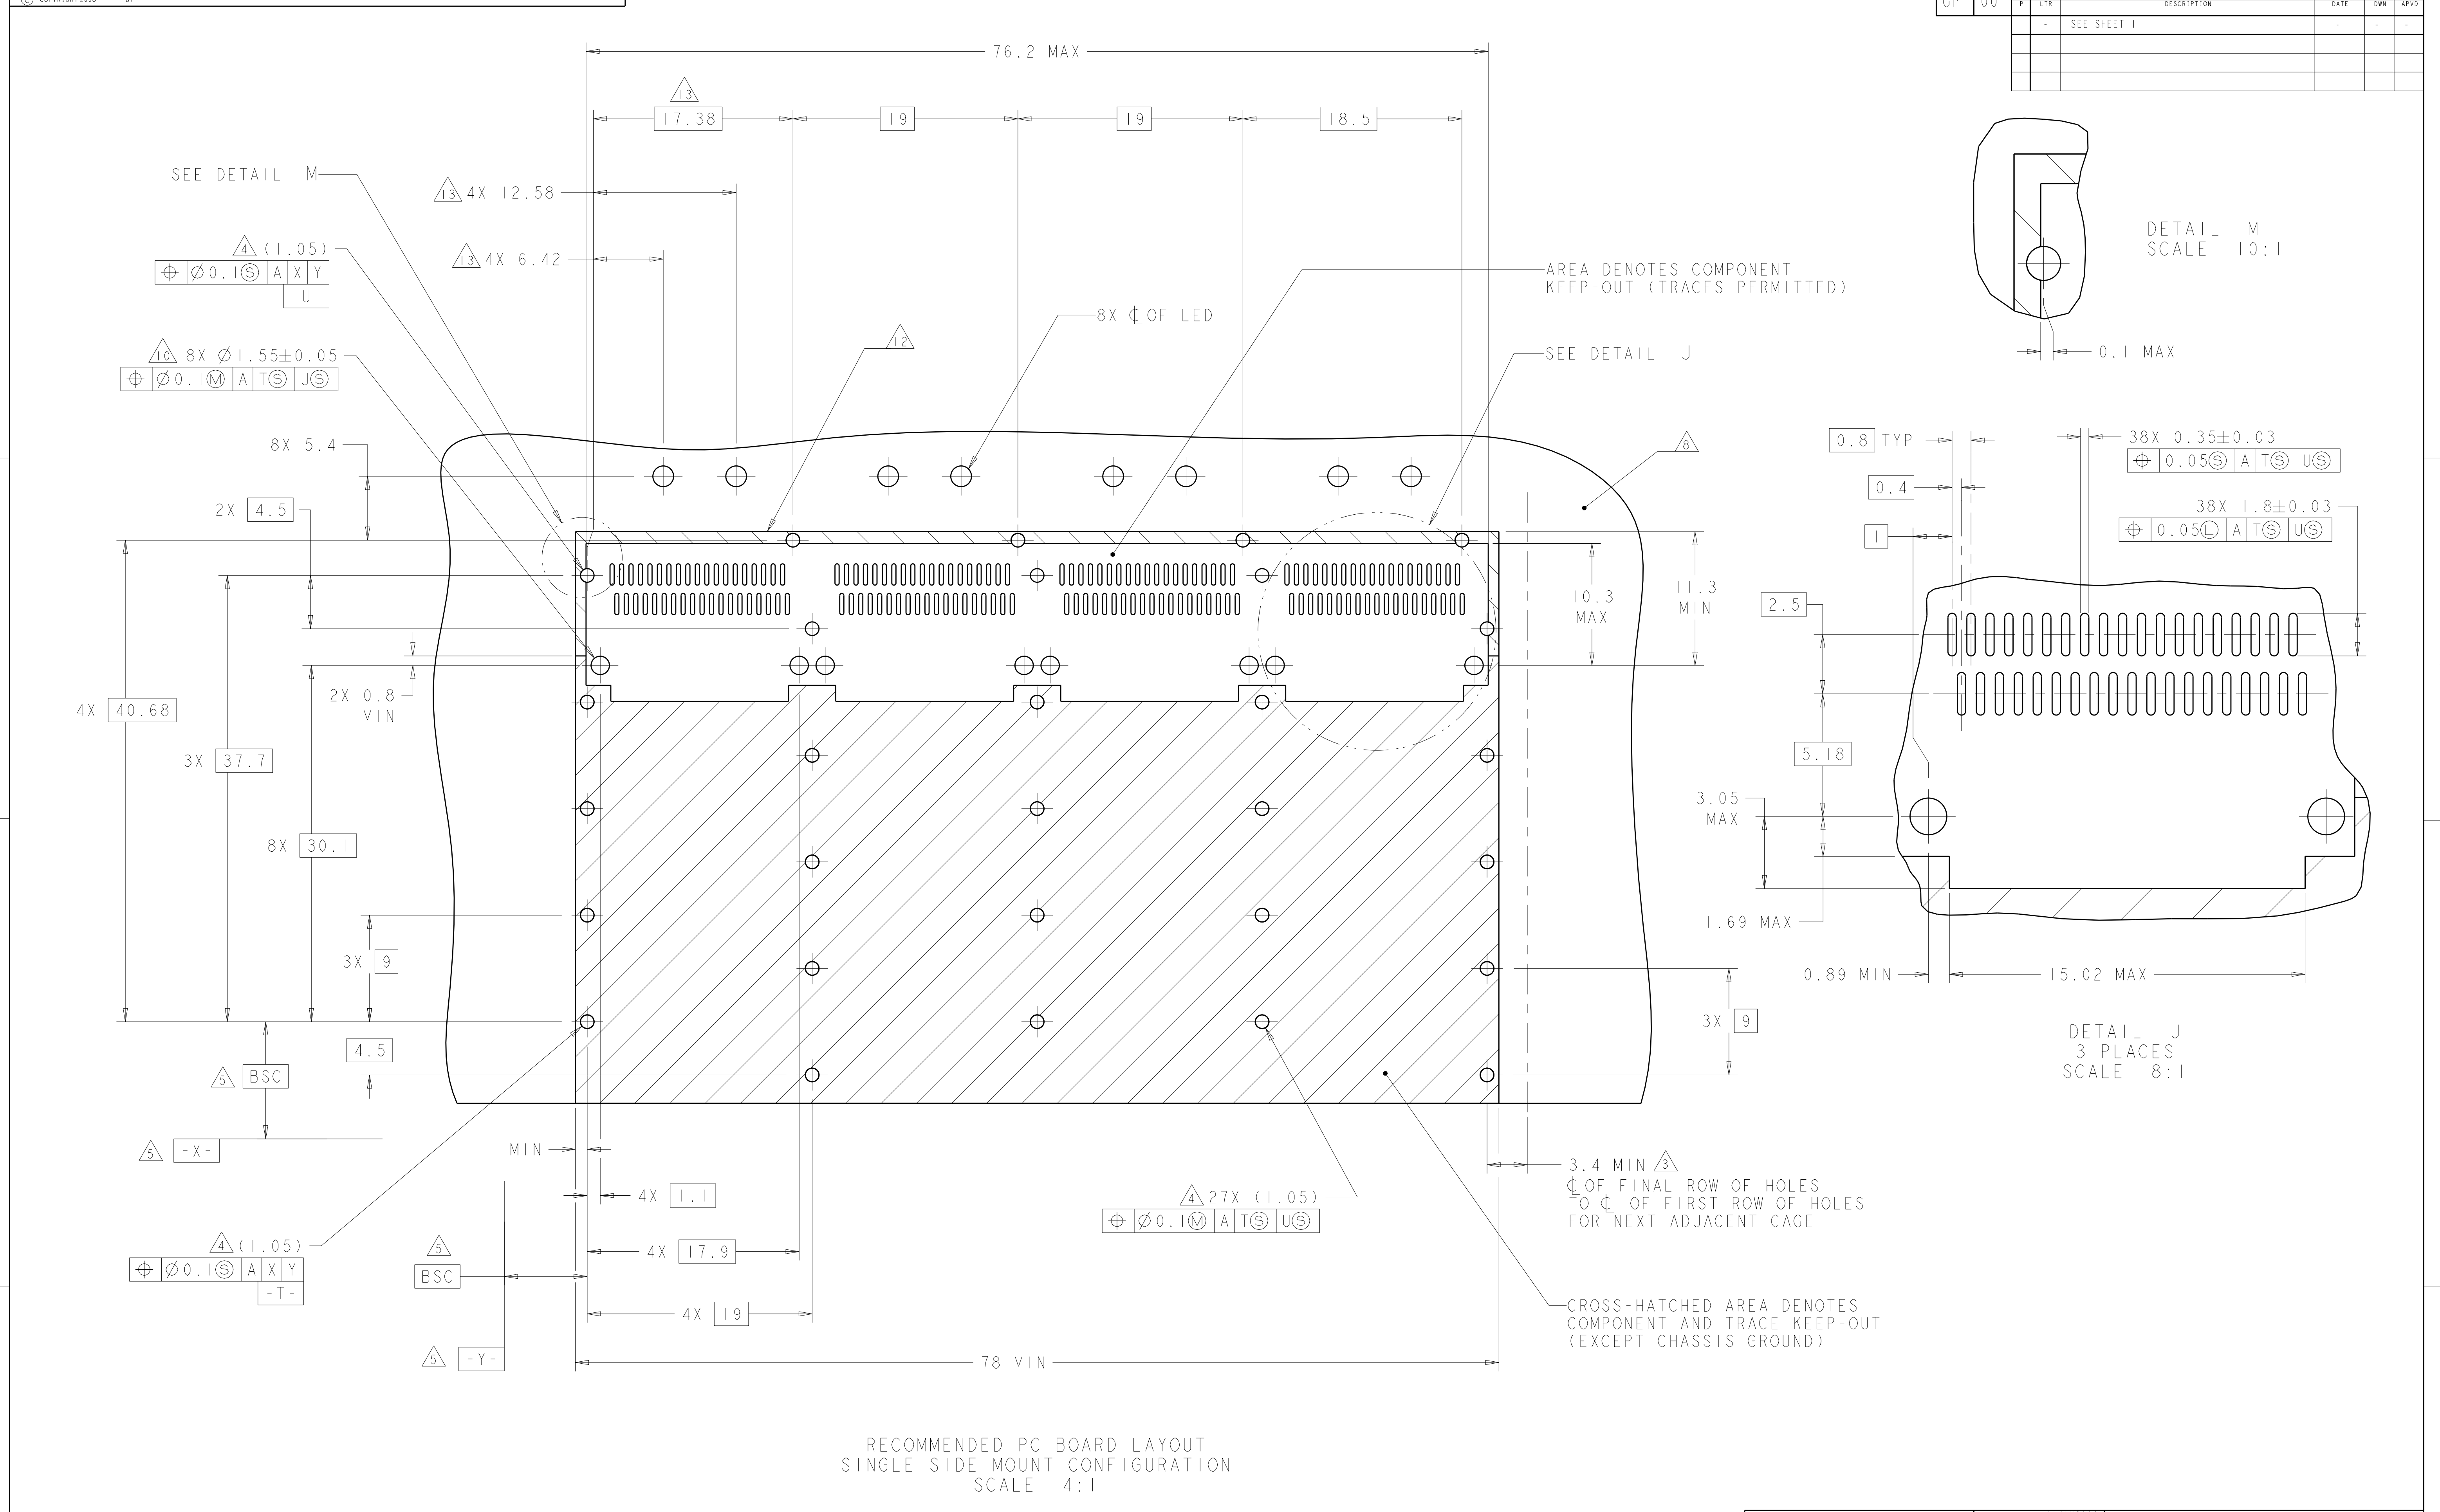

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
GP	00	-	-	SEE SHEET 1	-	-

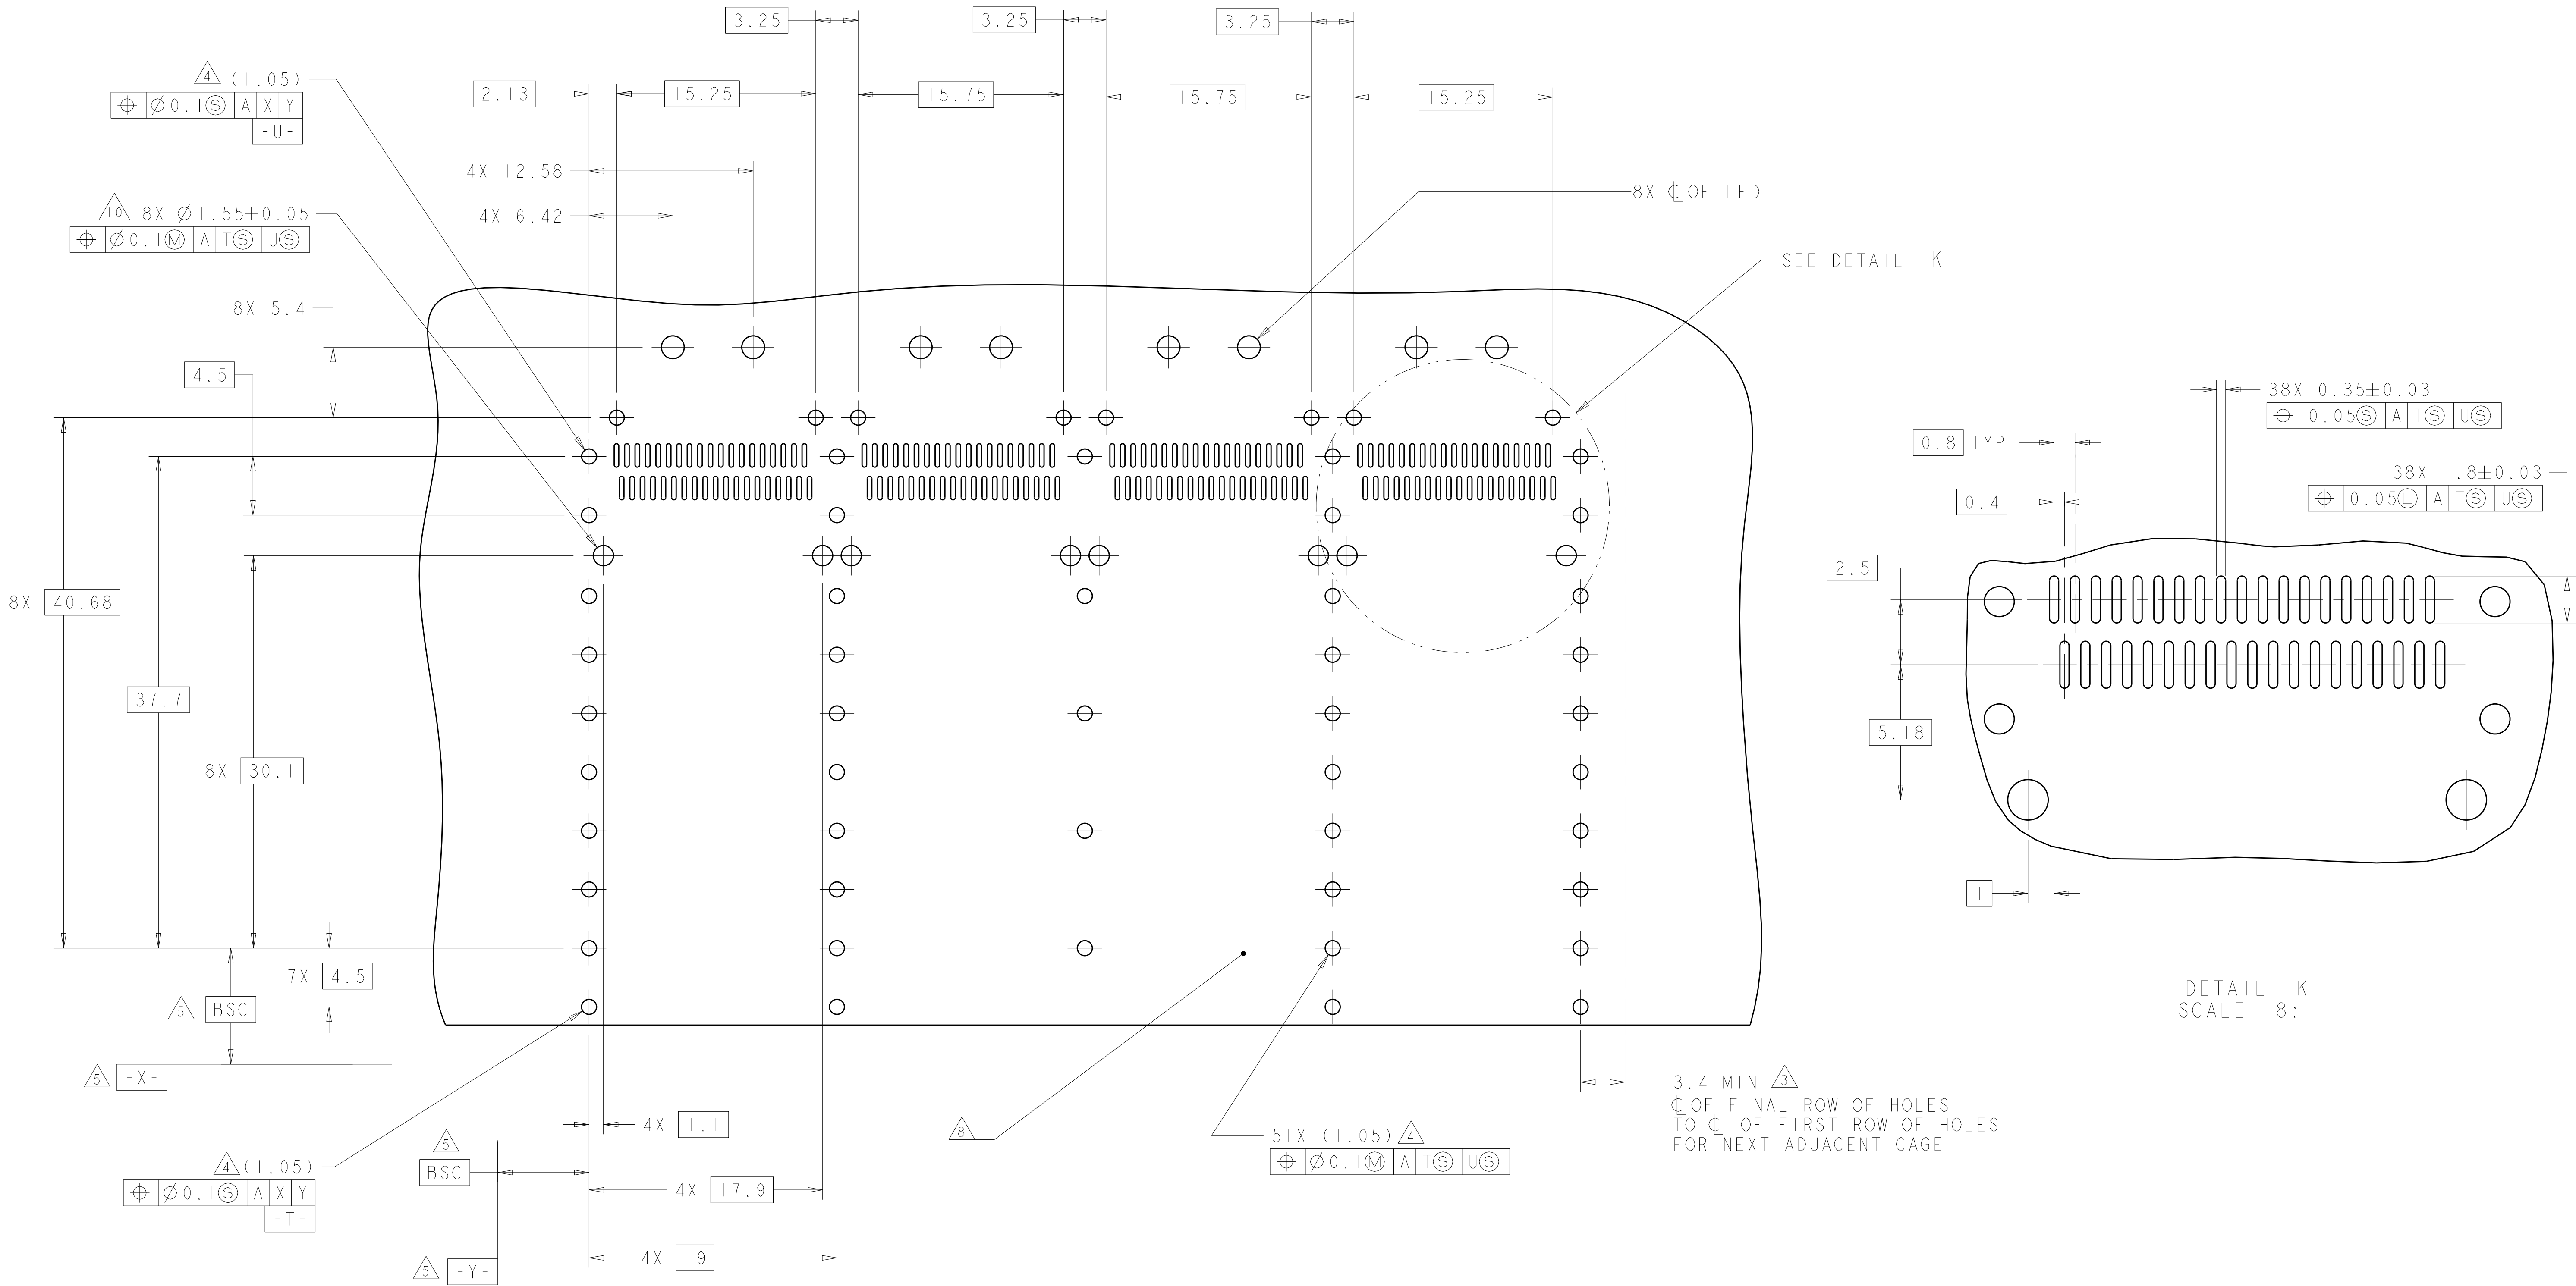

RECOMMENDED PC BOARD LAYOUT
BELLY TO BELLY CONFIGURATION
SEE SHEET 4 FOR COMPONENT AND TRACE KEEP-OUTS
SCALE 4:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. VALENTINE CHK E. BRIGHT APVD F. BRIGHT	01MAY2008 01MAY2008 01MAY2008	TE Connectivity	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
mm		0 PLC $\pm$ 1 PLC ± 0.1 2 PLC ± 0.1 3 PLC $\pm$ 4 PLC $\pm$ ANGLES $\pm$ FINISH		1X4 CAGE ASSEMBLY, BEHIND BEZEL, W/ LIGHT PIPES AND HEAT SINKS, QSFP	
MATERIAL		WEIGHT		SIZE CAGE CODE DRAWING NO	
-		-		A100779C=2057183	
CUSTOMER DRAWING		SCALE 4:1		SHEET 5 OF 5	
				REV F	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru