


## SPECIFICATION CONTROL DRAWING

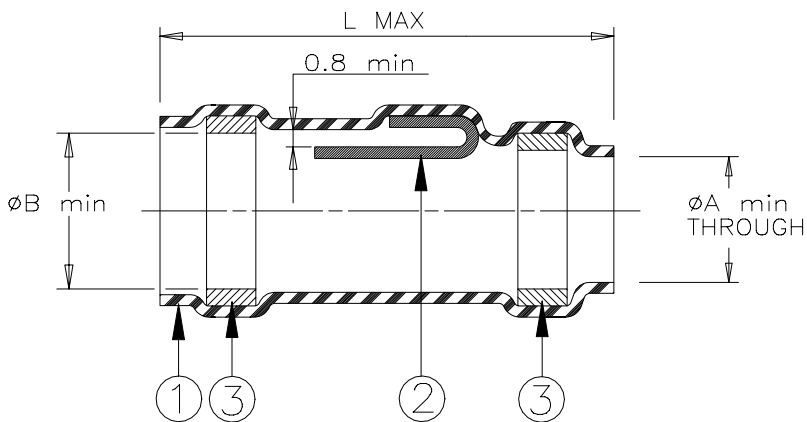

Product Revision		Product Dimensions				Cable Dimensions				
Product Name		L max	øA min	øB min	øE max	øC max	øD min	øF min	H±0.5 (H±0.02)	G±0.5 (G±0.02)
B-013-10	H	17.2 (0.675)	2.6 (0.085)	3.9 (0.155)	2.6 (0.100)	3.9 (0.155)	1.4 (0.055)	1.2 (0.045)	5.5 (0.215)	7.0 (0.275)
B-013-11	E	17.2 (0.675)	4.8 (0.190)	5.9 (0.230)	4.8 (0.190)	5.9 (0.230)	2.5 (0.100)	1.7 (0.065)	5.5 (0.215)	7.0 (0.275)
B-013-12	F	20.8 (0.820)	6.8 (0.270)	8.3 (0.325)	6.8 (0.270)	8.3 (0.325)	4.1 (0.160)	3.0 (0.120)	5.5 (0.215)	7.0 (0.275)
B-013-13	F	24.5 (0.965)	10 (0.395)	11.6 (0.455)	10 (0.395)	11.6 (0.455)	6.5 (0.255)	4.5 (0.175)	8.0 (0.315)	9.5 (0.375)


### MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- SOLDER PREFORM WITH FLUX:  
 SOLDER: TYPE Sn96 per ANSI-J-STD-006.  
 FLUX: TYPE ROM1 per ANSI-J-STD-004.
- MELTABLE SEALING RINGS: Thermally stabilized thermoplastic. Color: blue.

### APPLICATION

- These controlled soldering devices are designed for termination of a nickel plated copper shield on cables having an insulation rated for at least +150°C.
- Temperature range: -55°C to +175°C with excursion to 200°C.
- When installed per Raychem Process Standard, RCPS-100-70 or Aerospatiale Process Standard, IPDA 83-16, assemblies will meet those requirements of Raychem Specifications RT-1404.

For best results, prepare the cable as shown:

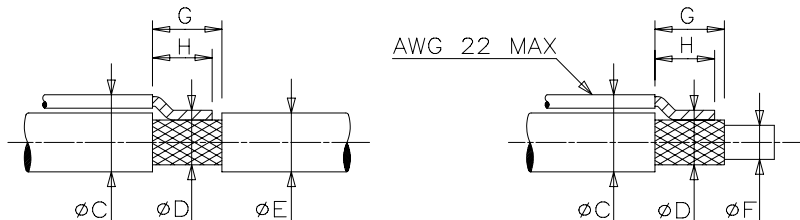

<b>Raychem Interconnect</b> a division of <b>tyco ELECTRONICS</b> 300 Constitution Drive Menlo Park, CA 94025, USA		THERMOFIT DEVICES		TITLE: <b>SOLDERSLEEVE DEVICE                  WITH LOCALIZED SOLDER                  HIGH TEMPERATURE</b>			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.				DOCUMENT NO.: B-013-1X			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D000155	REPLACES: D980890		
DRAWN BY: M. FORONDA	DATE: 19-April-00	PROD. REV.: SEE TABLE	DOC. ISSUE: 17	SCALE: None	SIZE: A	SHEET: 1 of 1	

If this document is printed it becomes uncontrolled.  
 Check with the web for latest revision.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)