



FEEDTHROUGH FOR P.C.B CRIMPING TYPE
CABLE 2/50

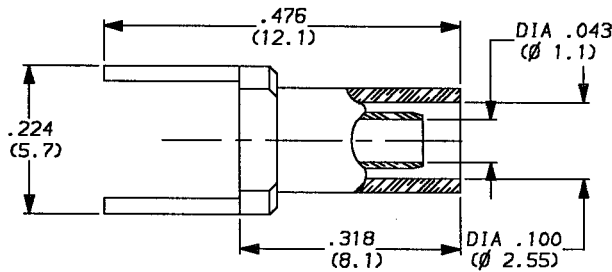

MOUNTING HOLE



(---) DIMENSIONS IN MM

WEIGHT 0 oz (..... g)

Cable : RG 178/U , RG 196/U

CHARACTERISTICS

NOMINAL IMPEDANCE	50	Ω	STANDARDISATION	-
FREQUENCY RANGE	0-3	GHz		-
TEMPERATURE RATING	-55	to +155	°C	-
VSWR	NA	Max		-
RF INSERTION LOSS	NA	dB Max	CABLE RETENTION	7.2 Lb Max 32 N Max
VOLTAGE RATING	750	Vrms	CENTER CONTACT RETENTION	
DIELECTRIC WITHSTANDING VOLTAGE	2000	Vrms	Axial force - mating end	0 Lb Max NA N Max
INSULATION RESISTANCE	NA	MΩ	Axial force - opposite end	0 Lb Max NA N Max
HERMETIC SEAL	NA	cc/s cm ³ /s	Torque (Max)	0 inch.oz NA cm.N
LEAKAGE (pressurized only)	0	psi	MATING TORQUE RECOMMENDED	0 inch.Lb NA cm.N
-	-	-	-	-
-	-	-	-	-

CONSTRUCTION

CONNECTOR PARTS	MATERIALS	FINISH
Body	Brass	Gold over nickel
Outer contact	-	-
Center contact	-	-
Insulators	-	-
Ferrule	Brass	Gold over nickel
-	-	-
-	-	-
-	-	-
-	-	-

ISSUE	REVISION No	DESCRIPTION	BY	DATE
.
.
.
.



Initiated on 03 11 88
Superseded on ---

The information given here is subject to change without notice. Design changes may be in order to improve the product.




Panel cable receptacle, crimp-type
- cable 2/50

SERIES: MCX




GMBH A INC.


- 1-1 To slide ferrule on the cable
- 1-2 Cable stripping

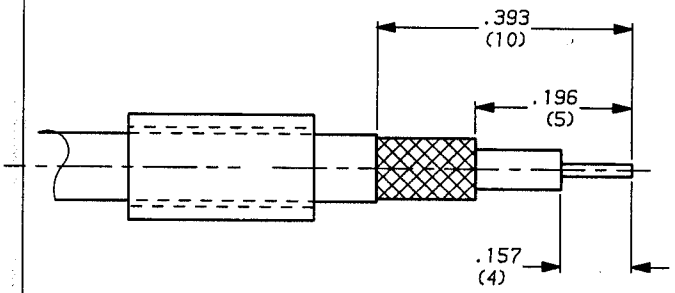

- 2-1 To open the braid
- 2-2 To slide body under braid
- 2-3 To slide the ferrule on braid according to F direction

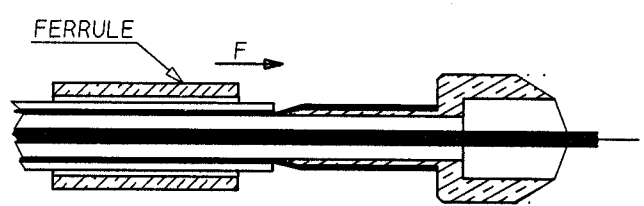

- 3-3 To crimp the ferrule
- crimping tool R 282 271
- Hex : .127 (3.25)

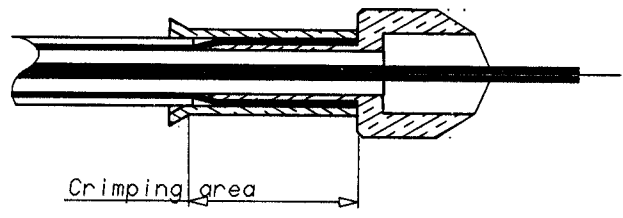

ISSUE	REVISION No	DESCRIPTION	BY	DATE

Initiated on 29 08 88

The information given here is subject to change without notice. Design changes may be in order to improve the product.



Superseded on -----

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru