


**TROMPETER SPECIFICATION SHEET**  
**CABLE, RADIO FREQUENCY, TWIN CONDUCTOR, BALANCED LINE**  
**TWC-78-1**

**RED INDICATES ORIGINAL**

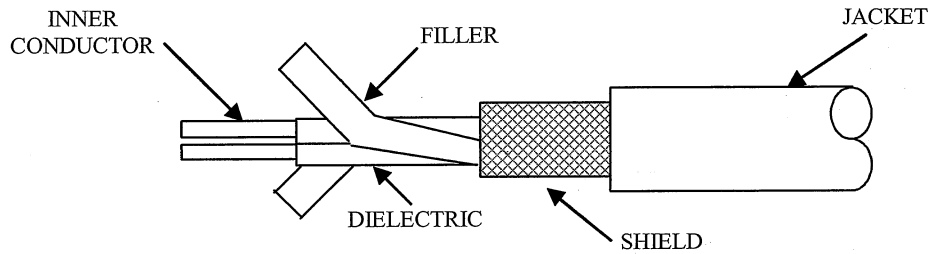

**REQUIREMENTS:**

1. IMPEDENCE (OF PAIR) -----  $78 \pm 3$  OHMS
2. OPERATING VOLTAGE ----- 0.3 KVRMS MAX/0.6 KVDC MAX
3. BEND RADIUS ----- 1.5 INCH MIN
4. CAPACITANCE ----- COND TO COND ----- 20.3 PF/FT MAX  
 CONDS TO SHIELD ----- 36.5 PF/FT
5. CONDUCTOR LOOP RESISTANCE ----- 179 OHMS/M FT MAX
6. VELOCITY OF PROPAGATION ----- 66% NOM
7. ATTENUATION: FREQUENCY                      dB/100 FT NOM                      FREQUENCY                      dB/100 FT NOM
 

1 MHz	2.00	40 MHz	10.60
3 MHz	3.00	50 MHz	11.90
4 MHz	3.50	100 MHz	16.80
5 MHz	4.00	200 MHz	23.70
7 MHz	4.50	500 MHz	37.50
10 MHz	5.30	700 MHz	44.30
20 MHz	7.50	1000 MHz	53.00
30 MHz	9.20		
8. WEIGHT ----- 15.7 LB/1000 FT
9. OPERATING TEMPERATURE RANGE -----  $-40^{\circ}$  C TO  $+80^{\circ}$  C
10. MARK: TROMPETER ELECTRONICS TWINAX TWC-78-1 (\*)  
 (\*) VENDOR I.D. CODE

DESCRIPTION	CONSTRUCTIONAL DETAILS
INNER CONDUCTORS	TWO CONDUCTORS, EACH 7 STRANDS OF AWG SIZE 33 TINNED COPPER WIRE PER ASTM-B-33. NOM DIA .022
DIELECTRICS	TWO EACH POLYETHYLENE PER L-P-390C, TYPE II, C1.H, 1 EA GR.3, NATURAL, 1 EA GR.2, BLUE. .043 $\pm$ .002 DIA TYP
FILLERS	TWO EACH POLYETHYLENE PER L-P-390C, TYPE II C1.L GR.3
CABLE CORE	.085 $\pm$ .003 O.D. DIELECTRICS AND FILLERS TO HAVE A RIGHT HAND OR LEFT HAND LAY, 8 TWISTS PER FOOT. AN OPTIONAL NYLON-THREAD WRAP MAY THEN BE APPLIED WITH SUFFICIENT COVERAGE TO MAINTAIN THE POSITION OF THE COMPONENTS
SHIELD	SINGLE BRAID, AWG SIZE 36 TINNED COPPER WIRE SHIELD COVERAGE 93%. .108 NOM O.D.
JACKET	BLUE (PER EIA-359-A, MUNSELL COLOR CHART, SYMBOL CENTROID) POLYVINYLCHLORIDE .150 $\pm$ .005 O.D.

DATE 7-1-2008

APPR *[Signature]*

DWN MWJ

ECO 16590

REV L

<b>TSI</b>	DWN	M JOHNSON	3-12-08	MATERIAL	CODE IDENT	DRAWING NO.	REV
	CHK	<i>jm</i>	6-26-08	_____	14949	TWC-78-1	L
	ENG	_____	_____	SCALE -----	DATE 10-6-76	SHEET	
	APPR	<i>jm</i>	4-30-08				

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: org@lifeelectronics.ru