

NOTES:

1. MATERIALS AND FINISHES:
BODY, BAYONET SLEEVE, WASHER & RETAINING RING - BRASS, NICKEL PLATING
OUTER CONTACT - BeCu, NICKEL PLATING
CONTACT - PHOSPHOR BRONZE, GOLD PLATING
FERRULE - COPPER, NICKEL PLATING
INSULATOR - PTFE
SPRING - STAINLESS STEEL, PASSIVATED
O-RING - SILICONE RUBBER, RED

2. ELECTRICAL:
A. IMPEDANCE: 75 OHM
B. FREQUENCY RANGE: DC - 4 GHz
C. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.

3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65° C TO +165° C

4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED:
"AMPHENOL RF, 34-1100" DATE CODE

5. HIGH DENSITY INSTALLATION/REMOVAL TOOL: 227-T2000

6. CABLE ASSEMBLY INSTRUCTIONS:
A. TRIM CABLE AS SHOWN.
B. SOLDER CONTACT TO CABLE CENTER CONDUCTOR
C. INSERT CONTACT AND CABLE INTO CONNECTOR
D. CRIMP FERRULE WITH .178" HEX.
E. APPLY HEAT SHRINK TUBING OVER FERRULE
F. HEAT SHRINK TUBING SHOULD FULLY (360 DEG)
COVER THE BUMP ON BODY AND END WITHIN AREA "A"

7. SHOWS CABLE ENTRY DIMENSIONS.


8. ADHESIVE LINED HEAT SHRINK TUBE
IS INCLUDED (NOT SHOWN).

9. SEALING: IP67 IN MATED CONDITION.



THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	15-Jun-16	01042	MM

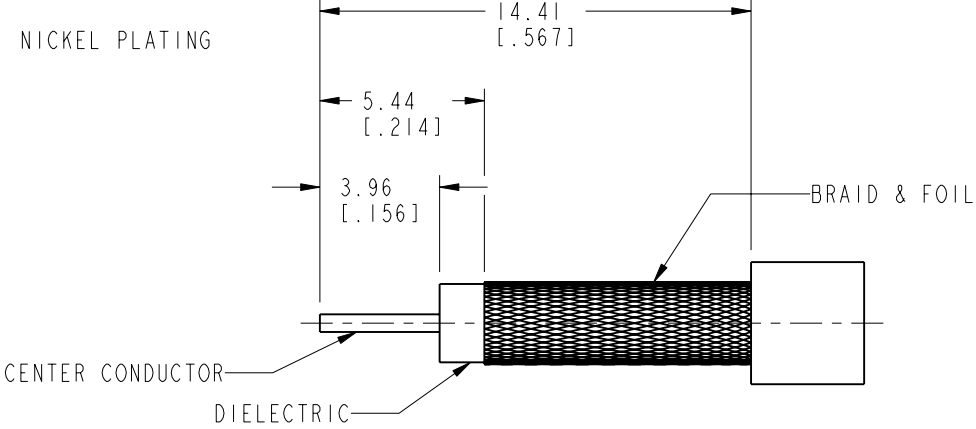

RECOMMENDED CABLE
STRIPPING DIMENSIONS

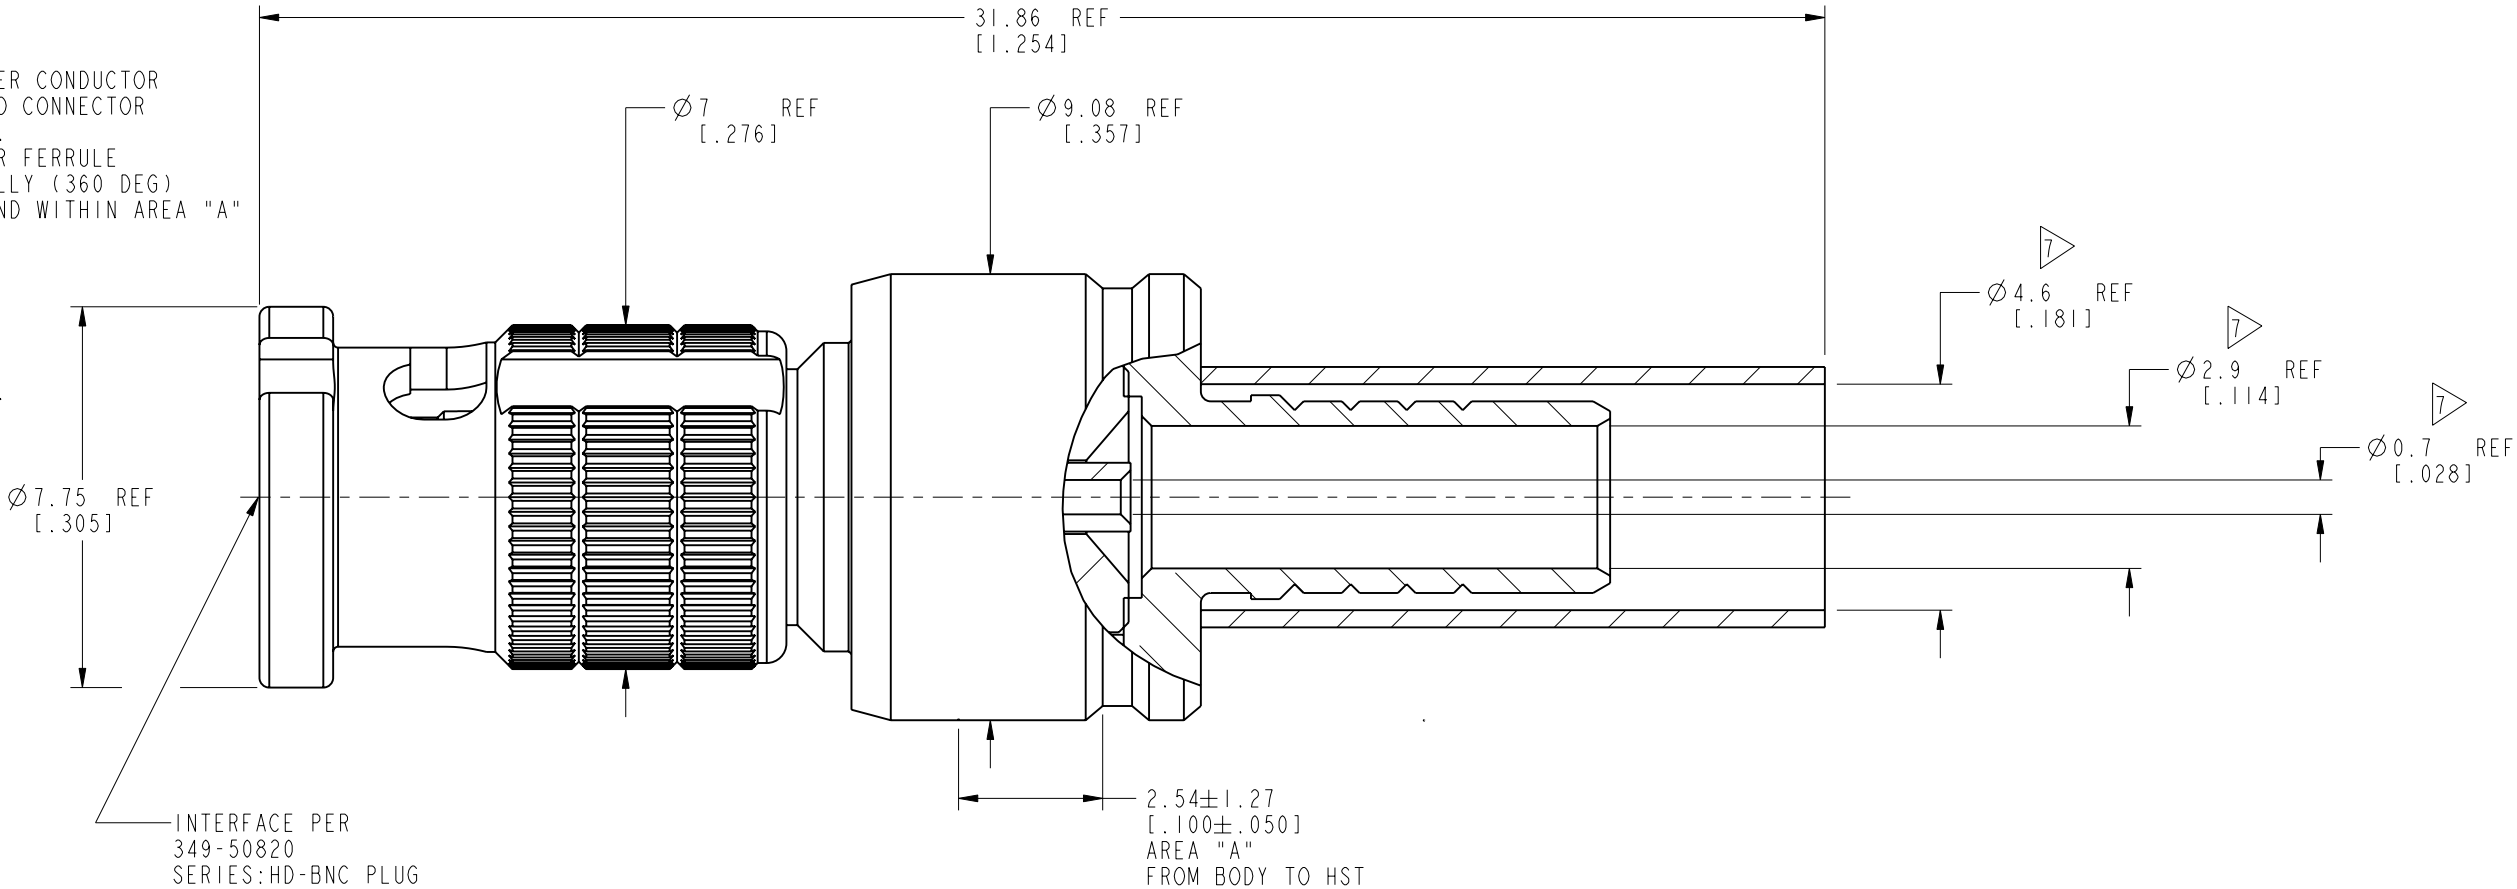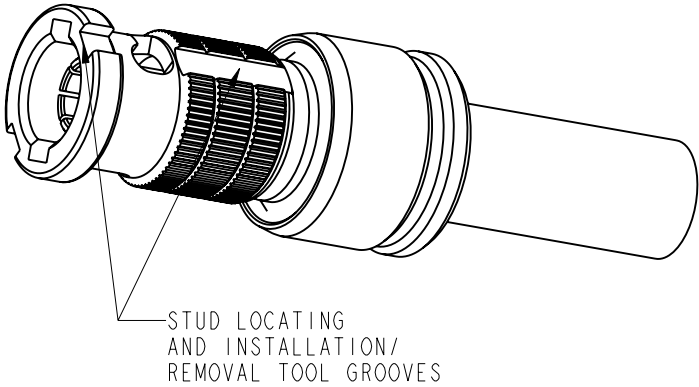

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
<0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ±1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL
SEE NOTES

REFERENCE
7207 AND
CONFIGURATION LEVEL: In Work

FINISH

DRAWN
STAR

ENGINEER
SUNDE

APPROVED
S.HSIEH

CAD FILE

DATE
15-Jun-16

DATE
15-Jun-16

DATE
15-Jun-16

TITLE
HD-BNC STR PLUG
FOR BELDEN 1855A
CABLE, IP67 SEALED

SCALE: 2.0:1.0 SHEET 2 OF 2

DWG SIZE
B

REV
A

Amphenol RF

www.amphenolrf.com

DRAWING NO. 34-1100

ITEM NO. 34-1100

PART NO. 34-1100

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru