

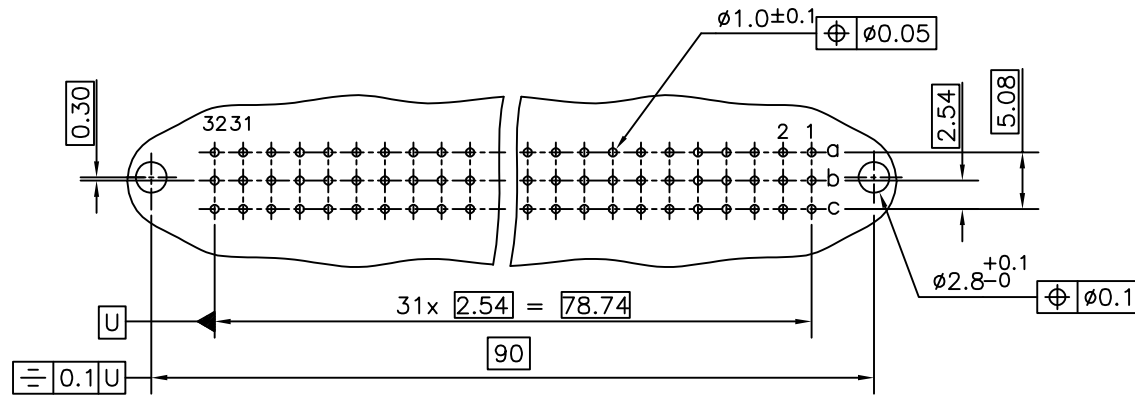


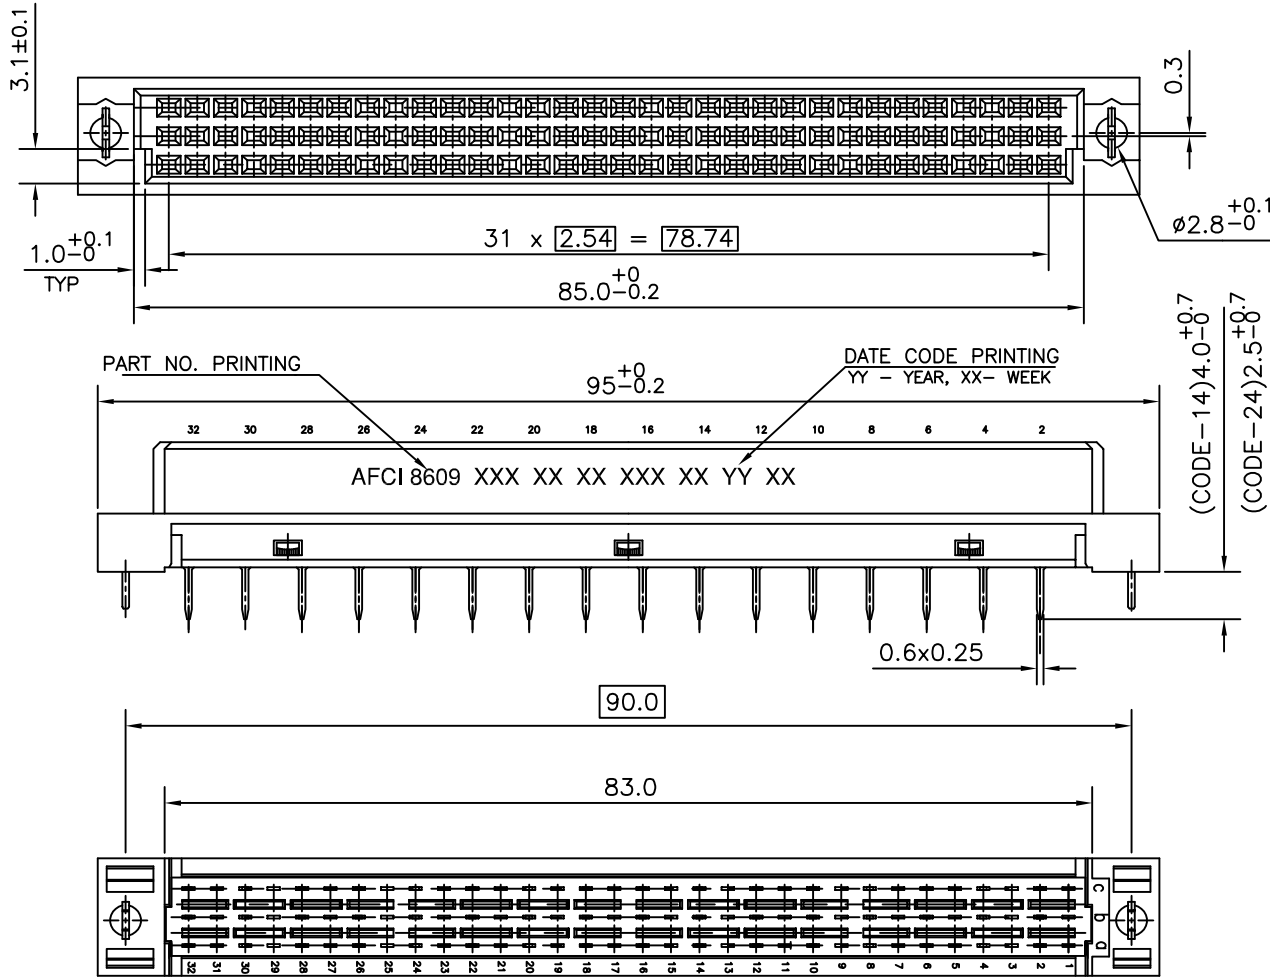

- NOTES:
1. THE "LF" PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004.
 2. LEAD FREE OR RoHS DIRECTIVE LABELING TO BE PROVIDED AS PER GS-14-920 FOR LEAD FREE VERSION.
 3. FOR GENERAL CHARACTERISTICS AND RoHS INFORMATION, REFER DRAWING C-8609-0000A.

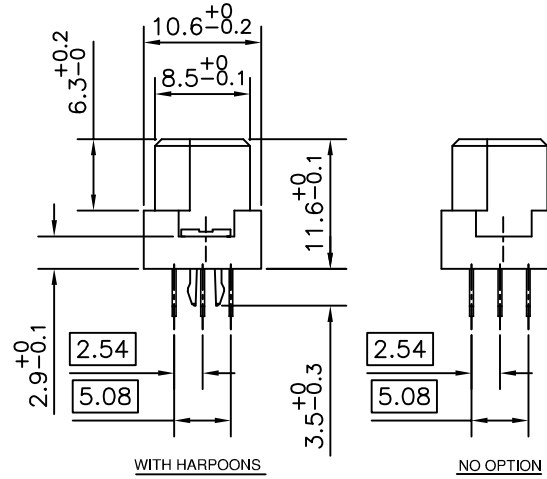

TECHNICAL SPECIFICATION	
INSULATOR MATERIAL	: POLYESTER THERMOPLASTIC UL94V-0, GREY
	HOUSING CAN WITHSTAND EXPOSURE TO LEAD FREE WAVE SOLDERING TEMPERATURE OF 260-265°C FOR STRAIGHT CONNECTORS AS IT IS IN CLASSICAL LEAD WAVE SOLDERING AT 235-250°C
CONTACT / HARPOON MATERIAL	: COPPER ALLOY
CONTACT PLATING	
ACTIVE ZONE	: Au / GXT™ OVER NICKEL
TERMINATION ZONE	
LEAD FREE VERSION	: TIN (PURE MATTE) OVER NICKEL
HARPOON PLATING	
LEAD FREE VERSION	: TIN (PURE MATTE) OVER NICKEL
ELECTRICAL DATA	
CURRENT RATING AT 20°C	: 1.5 A
CURRENT (I MAX)	: 2 A
TEMPERATURE RANGE	: -55°C/+125°C
CONTACT RESISTANCE	: ≤ 20mΩ
INSULATION RESISTANCE	: ≥ 10 ⁹ MΩ
TEST VOLTAGE (rms)	: 1000V
MECHANICAL DATA	
INSERTION FORCE PER CONTACT	: ≤ 0.94N
EXTRACTION FORCE PER CONTACT	: ≥ 0.15N
REFERENCE SPECIFICATIONS : DIN 41612 / IEC 603-2	
SERIES 8609 3 48 8 1 14 7 5 8 V1LF	
ROWS FITTED WITH CONTACTS	
Rows a-b-c	3 48
Rows a-c	4 32
NUMBER OF CONTACTS	
TYPE OF INSULATOR	
3 ROW FEMALE INSULATOR	8
METHOD OF MOUNTING	
STANDARD MOUNTING - STYLE C	
TERMINATION	
STRAIGHT SPILL (LONG)	14
STRAIGHT SPILL (SHORT)	24
OPTIONS	
NO OPTION	7
WITH HARPOONS	H
PERFORMANCE CLASS	
4 - DIN 41612 CLASS 3	4
5 - DIN 41612 CLASS 2	5
6 - DIN 41612 CLASS 1	6
8 - AS PER MIL C 55302/JSS 50808	8
PITCH PER ROW	
5.08	8
SPECIAL CODE	
V1LF	LEAD FREE VERSION

mat'l. code				surface	tolerance	projection	product family			
-				ISO 1302	ISO 406 ISO 1101		8609			
ltr	ecn no	dr	date	tolerances unless otherwise specified			title			
A	I04-0100	MINI	09/11/2004	angles	linear	.0±.1	DIN STANDARD RECEPTACLE			
B	I05-0042	MINI	19/05/2005				STRAIGHT SPILL DIN 41612 STYLE-C			
C	I06-0063	MINI	01/06/2006	0'±1'			scale -			
D	ELX-I-30201	AMAL	16/05/2018	dr	MINI K VANDANATH	29/09/2004	dwg no			
				engr	RAKHEE GEORGE	29/09/2004	sheet 1 of 1			
				chr	M JACOB	16/05/2018	size			
				appd	BIJU K PAUL	16/05/2018	A3			
sheet index		revision	D				type			
		sheet	1				Product Customer Drawing			

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru