


## MELF Resistors

### WRM Series

- AEC-Q200
- High reliability
- Predictable pulse handling capability
- Tolerances down to 0.1%
- TCR down to 5 ppm/°C

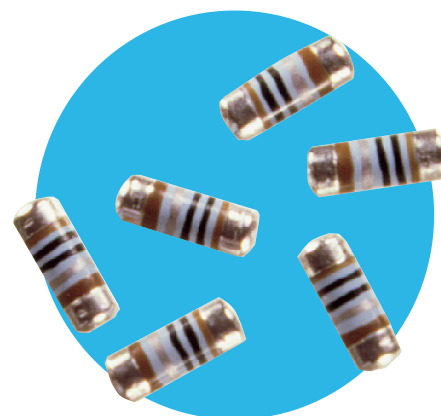


All parts are Pb-free and comply with EU Directive 2011/65/EU amended by (EU) 2015/863 (RoHS3)

## Electrical Data

|                                             |        | WRM 0102        | WRM 0204               | WRM 0207        |
|---------------------------------------------|--------|-----------------|------------------------|-----------------|
| Power rating @70°C                          | watts  | 0.2             | 0.25                   | 0.4             |
| Resistance Range                            | ohms   | 1R0- 1M0        | R22-5M1                | R22- 4M7        |
| Limiting element voltage                    | volts  | 200             | 200                    | 250             |
| TCR                                         | ppm/°C | 15, 25, 50, 100 | 5, 10, 15, 25, 50, 100 | 15, 25, 50, 100 |
| Resistance tolerance                        | %      |                 | 0.1, 0.25, 0.5, 1, 5   |                 |
| Standard values                             |        |                 | E24 & E96              |                 |
| Thermal impedance                           | k/W    | 250             | 200                    | 140             |
| Ambient temperature range                   | °C     | -55 to +155     | -55 to +125            |                 |
| Insulation resistance                       | ohms   |                 | >10 <sup>10</sup>      |                 |
| Zero ohm jumper current rating              | amps   |                 | 2                      | 4               |
| Zero ohm jumper maximum residual resistance | mΩ     |                 | 15                     |                 |

## Physical Data

| Dimensions (mm) & weight (g) |       |       |                    |       |                    |        |  |
|------------------------------|-------|-------|--------------------|-------|--------------------|--------|---------------------------------------------------------------------------------------|
| Type                         | L max | D max | D <sup>1</sup> max | K min | L <sup>1</sup> min | Weight |                                                                                       |
| WRM 0102                     | 2.3   | 1.35  | 1.3                | 0.3   | 1.1                | 0.01   |                                                                                       |
| WRM 0204                     | 3.7   | 1.55  | 1.55               | 0.5   | 1.5                | 0.02   |                                                                                       |
| WRM 0207                     | 6.1   | 2.4   | 2.4                | 0.5   | 2.9                | 0.08   |                                                                                       |

### Construction

A metal film is deposited onto a high dissipation ceramic former to which tin plated terminating caps are fitted.

The resistor is adjusted to value by a helical cut in the film and the body is protected by a lacquer coating.

### Marking

Resistance values are colour coded with four bands, three indicating value and one indicating the multiplier. (Note this describes standard marking, but certain values may still be supplied with the addition of a tolerance band following the multiplier.).

### Terminations

#### Material

Plated steel cap.

#### Solderability

The pure tin finish produces ageing free contacts on which low melting solders can be used. Dipped area shall be covered with a smooth and bright solder coating after 3 seconds immersion at 215°C.

### Solvent Resistance

The body protection and marking are resistant to all normal industrial cleaning solvents suitable for printed circuit boards.

### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

## TCR and Tolerance Range

| Type Reference | TCR     | Tolerance |            |            |            |            |
|----------------|---------|-----------|------------|------------|------------|------------|
|                |         | 5%        | 1.0%       | 0.5%       | 0.25%      | 0.1%       |
| WRM0102        | ±100ppm | 1R0- 1M0  | 1R0- 1M0   | -          | -          | -          |
|                | ±50ppm  | 1R0- 1M0  | 1R0- 1M0   | 8R2- 1M0   | -          | -          |
|                | ±25ppm  | -         | 49R9- 390K | 49R9- 200K | 100R- 82K  | 100R- 82K  |
|                | ±15ppm  | -         | 100R- 56K  | 100R- 56K  | 100R- 56K  | 100R- 56K  |
| WRM0204        | ±100ppm | R22- R91  | -          | -          | -          | -          |
|                | ±50ppm  | -         | 1R- 5M1    | 10R- 1M6   | 22R- 332K  | 43R- 332K  |
|                | ±25ppm  | -         | 4R7- 500K  | 10R- 500K  | 22R- 402K  | 43R- 332K  |
|                | ±15ppm  | -         | -          | 10R- 221K  | 22R- 221K  | 43R- 221K  |
|                | ±10ppm  | -         | -          | -          | 22R- 221K  | 43R- 221K  |
|                | ±05ppm  | -         | -          | -          | 100R- 100K | 100R- 100K |
| WRM0207        | ±100ppm | R22- R91  | -          | -          | -          | -          |
|                | ±50ppm  | -         | 1R- 4M7    | 10R-1M6    | -          | -          |
|                | ±25ppm  | -         | 10R- 1M    | 10R- 680K  | 51R1- 330K | 100R- 100K |
|                | ±15ppm  | -         | -          | 51R1- 10K  | 51R1- 10K  | 100R- 10K  |

\* TC 10ppm & 5ppm is specified over the temperature range -10°C to +85°C.

## Performance Data

| Test                         | Δ R/R                     |                           |                |                |
|------------------------------|---------------------------|---------------------------|----------------|----------------|
|                              | 0204 and 0207             |                           |                | 0102           |
|                              | 75R - 100K                | 10R - <75R & >100K - 332K | <10R & >332K   | All values     |
| Short time overload*         | ≤0.05% + 0.01Ω            | ≤0.1% + 0.01Ω             | ≤0.25% + 0.05Ω | ≤0.25% + 0.05Ω |
| Bending test*                | ≤0.05% + 0.01Ω            | ≤0.1% + 0.01Ω             | ≤0.25% + 0.05Ω | ≤0.25% + 0.05Ω |
| Resistance to soldering heat | ≤0.05% + 0.01Ω            | ≤0.1% + 0.01Ω             | ≤0.25% + 0.05Ω | ≤0.25% + 0.05Ω |
| Temperature rapid change     | ≤0.05% + 0.01Ω            | ≤0.1% + 0.01Ω             | ≤0.25% + 0.05Ω | ≤0.25% + 0.05Ω |
| Endurance*                   |                           |                           |                |                |
| Load life                    |                           |                           |                |                |
| 1000h                        | ≤0.15% + 0.05Ω            | ≤0.15% + 0.05Ω            | ≤0.3% + 0.05Ω  | ≤0.5% + 0.05Ω  |
| 8000h                        | ≤0.3% + 0.05Ω             | ≤0.3% + 0.05Ω             | ≤0.6% + 0.05Ω  | ≤1.0% + 0.05Ω  |
| 225,000h                     | ≤0.9% + 0.05Ω             | ≤0.9% + 0.05Ω             | ≤1.8% + 0.05Ω  | ≤3.0% + 0.05Ω  |
| Climatic sequence*           | ≤0.25% + 0.05Ω            | ≤0.5% + 0.05Ω             | ≤1.0% + 0.05Ω  | ≤1.0% + 0.05Ω  |
| Damp heat steady state*      | ≤0.25% + 0.05Ω            | ≤0.5% + 0.05Ω             | ≤1.0% + 0.05Ω  | ≤1.0% + 0.05Ω  |
| Current noise                | <0.05μV/V                 | <0.25μV/V                 | <3μV/V         | <3μV/V         |
| Solderability                | >95% coverage             |                           |                |                |
| Voltage coefficient          | 0 to -0.5ppm/V            |                           |                |                |
| Voltage proof                | No flashover or breakdown |                           |                |                |

\* Resistors to be mounted on a PC-board according to IEC 115-1, clause 4.27.1.

\* AEC-Q200 approval applies to all values up to and including 3M4 at TCRs above 5ppm/°C and to zero ohm jumpers.


### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.

All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


Single Pulse

Maximum Pulse Load

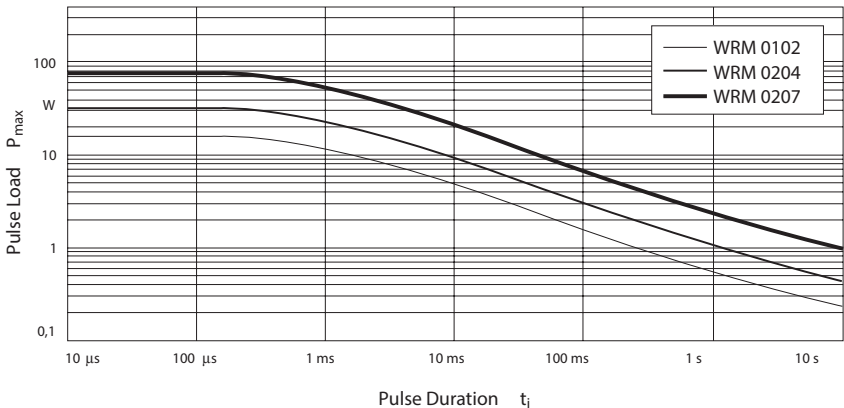

Continuous Pulses

Maximum Pulse Load

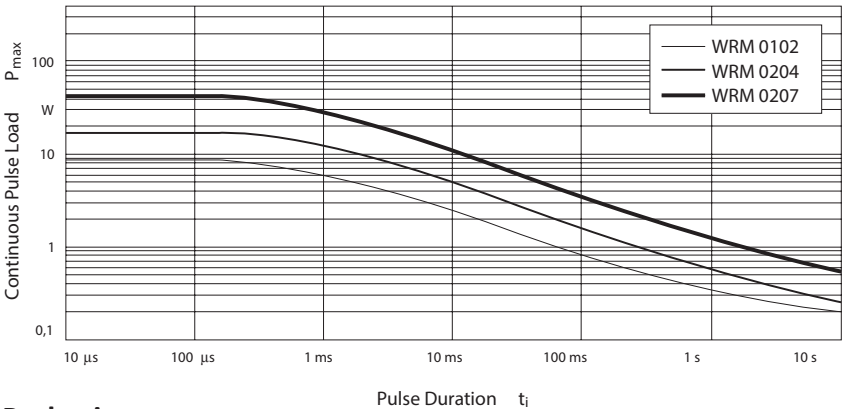

Packaging

The WRM 0102 and 0204 resistors are supplied reeled on 8mm blister tape. WRM 0207 resistors are supplied on 12mm blister tape. Packaging complies with the requirements of IEC 286-3.

Ordering Procedure

Example: **WRM0204C-1K0FI** (WRM0204, 50ppm/°C, 1 kilohm ±1%, Pb-free)

Example: **WRM0204-R000I** (WRM0204, zero ohm jumper, Pb-free)

|   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| W | R | M | 0 | 2 | 0 | 4 | C | - | 1 | K | 0 |   | F | I |
| 1 |   |   |   |   |   |   | 2 | 3 |   |   | 4 | 5 |   |   |

| 1<br>Type | 2<br>TCR        | 3<br>Value                                               | 4<br>Tolerance  | 5<br>Packing                     |
|-----------|-----------------|----------------------------------------------------------|-----------------|----------------------------------|
| WRM0102   | V = ±5ppm/°C    | 3/4 characters<br>R = ohms<br>K = kilohms<br>M = megohms | B = ±0.1%       | I = Standard                     |
| WRM0204   | T = ±10ppm/°C   |                                                          | C = ±0.25%      | 0102 3000 / 7" reel              |
| WRM0207   | Y = ±15ppm/°C   |                                                          | D = ±0.5%       | 0204 3000 / 7" reel <sup>1</sup> |
|           | D = ±25ppm/°C   | R000 = Jumper                                            | F = ±1%         | 0207 1500 / 7" reel              |
|           | C = ±50ppm/°C   |                                                          | J = ±5%         |                                  |
|           | Z = ±100ppm/°C  |                                                          | Omit for Jumper |                                  |
|           | Omit for Jumper |                                                          |                 |                                  |

Note 1: High precision parts may be supplied on 1000 piece reels – please enquire

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)