

■ Typical Specifications

Items		Specifications
Rating (max.)/(min.)(Resistive load)		0.15A 12V DC / 50μA 3V DC
Contact resistance (Initial / After operating life)		50mΩ max. / 100mΩ max.
Rotational torque		70±30mN·m
Operating life	Without load	10,000 cycles
	With load	10,000 cycles (0.15A 12V DC)

■ Product Line

Number of wafers	Poles	Positions	Changeover angle	Changeover timing	Actuator configuration	Actuator length (mm)	Minimum order unit (pcs.)		Product No.	Drawing No.
							Japan	Export		
1	2	5	30±3°	Non shorting	Round	20	60	240	<b>SRRN151800</b>	1
		Flat			15	<b>SRRN152000</b>				
	18-tooth serration	20			<b>SRRN161100</b>					
	Round				<b>SRRN142100</b>	2				
	4	3			18-tooth serration	15			<b>SRRN134300</b>	3

Note

All the axis are cutting shafts.

■ Packing Specifications

Tray

Number of packages (pcs.)		Export package measurements (mm)
1 case /Japan	1 case /export packing	
60	240	400×270×270

■ Dimensions

Unit:mm

No.	Style
1	

Refer to P.147 for shaft configurations.  
Refer to P.148 for soldering conditions.

# SRRN 6-position Vertical Type

Detector

Slide

Push

Rotary

Power

Dual-in-line  
Package Type

## Dimensions

Unit:mm

No.	Style
2	<p>Technical drawing of SRRN style 2. It includes a top view showing terminal positions 1 through 12, a side view showing a total length of 16 max. with segments of 11.3, 8, 5, and 6, and a mounting hole of <math>M7 \times 0.75</math> with a diameter of <math>\phi 6</math>. The front view shows a diameter of <math>\phi 24</math> and a mounting hole diameter of <math>\phi 3_{-0.2}^0</math>. Other dimensions include 19.2, 8.4, 8, 23.6, and 5.8.</p>
3	<p>Technical drawing of SRRN style 3. It includes a top view showing terminal positions 1 through 12, a side view showing a total length of 16 max. with segments of 11.3, 8, 5, and 6, and a mounting hole of <math>M7 \times 0.75</math> with a diameter of <math>\phi 6</math>. The front view shows a diameter of <math>\phi 24</math> and a mounting hole diameter of <math>\phi 3_{-0.2}^0</math>. Other dimensions include 19.2, 8.4, 8, 23.6, and 5.8.</p>

## Terminal Configuration

Unit:mm

Common terminal	Terminal
<p>Diagram of a common terminal with dimensions: 2.4, 1.8, 0.8x1.6 hole, 0.5, and 2.4.</p>	<p>Diagram of a terminal with dimensions: 1.8, 0.8x1.6 hole, 0.5, and 2.4.</p>

Standard Circuit Diagram (Standard Poles Per Step)

Number of poles	2		3		4	
Circuit diagram						
Dummy terminals	5-position	17 18	4-position	—	3-position	—
	6-position	—				


Note

The mark in the above table indicate a stopper with the shaft turned fully counterclockwise when viewed from direction A of the diagrams.

18-tooth Serration Shaft


The shaft shows the position in which it is turned fully counterclockwise.

Cutting Shaft

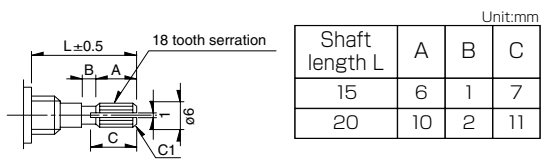


Details About Serration

- (1) The mold dimensions of standard serration and the dimensions of test jigs are as shown in the figure at left.
- (2) Position of the serration bottom  
When the shaft is turned fully counterclockwise, the position of the serration bottom is on the AA line.
- (3) Slitting angle  
The slitting angle (position) is not specified.

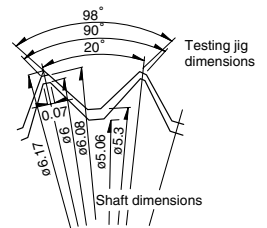


Round Shaft



Flat Shaft

The shaft shows the position in which it is turned fully counterclockwise.

Cutting Shaft

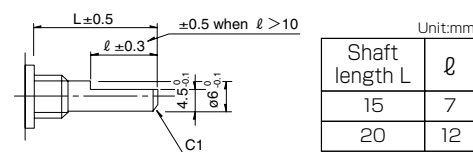


Shaft flatten angle	

Note





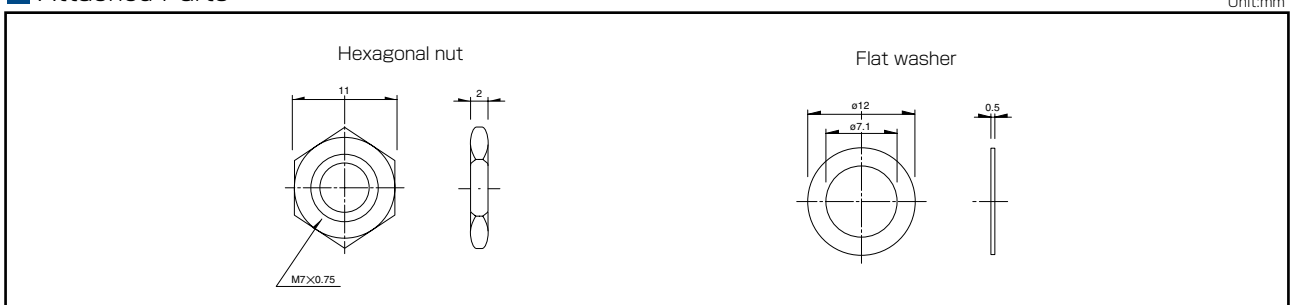








SRRM Series are based on (panel lug).

Attached Parts



# Rotary Switches


## List of Varieties

Series	SRBD	SRBQ		SRBM		SRBV	SRRM	SRRN																																																
		Insertion	Reflow type	Rotary	Pulse																																																			
Photo																																																								
Angle of throw	36°	40±3°		30±3°	18±3°	30±3°																																																		
Number of poles	1		1, 2		1	1, 2, 3, 4	2, 3, 4																																																	
Rotational torque	13±5mN·m	6±3mN·m 13±5mN·m		40±20mN·m 15±7mN·m		30±15mN·m	80±30mN·m (Shorting) 70±30mN·m (Non shorting)	70±30mN·m																																																
Dimensions (mm)	W	10	11.4		10		16.2																																																	
	D		12.4		12.5		18.5																																																	
	H		3.5		11		7.5																																																	
Operating temperature range	-25°C to +85°C	-10°C to +60°C		-30°C to +85°C		-10°C to +85°C	-10°C to +60°C	-30°C to +65°C																																																
Automotive use	—	—		—		—	—	—																																																
Life cycle																																																								
Rating (max.)/(min.) (Resistive load)	1mA 5V DC 50µA 3V DC	0.1A 16V DC 50µA 3V DC				0.3A 16V DC 50µA 3V DC		0.25A 30V DC 50µA 3V DC	0.15A 12V DC 50µA 3V DC																																															
Durability	Operating life without load	10,000 cycles 250mΩ max.	10,000 cycles 100mΩ max.		30,000 cycles 100mΩ max.	10,000 cycles 100mΩ max.		10,000 cycles 40mΩ max.	10,000 cycles 70mΩ max.																																															
	Operating life with load Load: as rating	10,000 cycles 250mΩ max.	10,000 cycles 100mΩ max.	10,000 cycles 150mΩ max.			10,000 cycles 60mΩ max.		10,000 cycles 100mΩ max.																																															
Electrical performance	Initial contact resistance	200mΩ max.	50mΩ max.				20mΩ max.		50mΩ max.																																															
	Insulation resistance	100MΩ min. 100V DC					100MΩ min. 500V DC																																																	
	Voltage proof	100V AC for 1minute					500V AC for 1minute																																																	
Mechanical performance	Terminal strength	3N for 1minute		5N for 1minute			10N for 1minute	5N for 1minute																																																
	Actuator strength	Operating direction	—	—	0.5N·m	—	0.6N·m	1N·m																																																
		Pulling direction	50N	20N	100N																																																			
	Wobble of actuator	Load at the tip of shaft SRRM, SRBM, SRRN: 5N, SRBQ, SRBV: 1N The below table shows for SRRM, SRBM, SRRN      The below table shows for SRBQ      The below table shows for SRBV																																																						
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Measuring position from mounting surface</th> <th>Shaft wobble (max. value)</th> <th>Applicable mounting dimension</th> <th>Distance from mounting surface to the tip of shaft</th> <th>Shaft wobble (max. value)</th> <th>Measuring position from mounting surface</th> <th>Shaft wobble (max. value)</th> <th>Applicable mounting dimension</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>0.17</td> <td>15</td> <td>below 5</td> <td>0.5</td> <td>10</td> <td>0.2</td> <td>15</td> </tr> <tr> <td>15</td> <td>0.25</td> <td>20</td> <td>above 5 and below 10</td> <td>0.9</td> <td>15</td> <td>0.3</td> <td>20</td> </tr> <tr> <td>20</td> <td>0.35</td> <td>25</td> <td>above 10 and below 15</td> <td>1.2</td> <td>20</td> <td>0.4</td> <td>25</td> </tr> <tr> <td>25</td> <td>0.42</td> <td>30</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>30</td> <td>0.5</td> <td>above 35</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> <p style="text-align: right;">Unit:mm</p>									Measuring position from mounting surface	Shaft wobble (max. value)	Applicable mounting dimension	Distance from mounting surface to the tip of shaft	Shaft wobble (max. value)	Measuring position from mounting surface	Shaft wobble (max. value)	Applicable mounting dimension	10	0.17	15	below 5	0.5	10	0.2	15	15	0.25	20	above 5 and below 10	0.9	15	0.3	20	20	0.35	25	above 10 and below 15	1.2	20	0.4	25	25	0.42	30						30	0.5	above 35					
Measuring position from mounting surface	Shaft wobble (max. value)	Applicable mounting dimension	Distance from mounting surface to the tip of shaft	Shaft wobble (max. value)	Measuring position from mounting surface	Shaft wobble (max. value)	Applicable mounting dimension																																																	
10	0.17	15	below 5	0.5	10	0.2	15																																																	
15	0.25	20	above 5 and below 10	0.9	15	0.3	20																																																	
20	0.35	25	above 10 and below 15	1.2	20	0.4	25																																																	
25	0.42	30																																																						
30	0.5	above 35																																																						
Environmental performance	Cold	-40°C 500h	-20°C 96h	-40°C 96h		-20°C 96h		-40°C 96h																																																
	Dry heat	85°C 500h	85°C 96h																																																					
	Damp heat	60°C, 90 to 95%RH 500h	40°C, 90 to 95%RH 96h																																																					
Page	133	135	137	140	142	145																																																		


Rotary Switches Soldering Conditions . . . . . 148  
 Rotary Switches Cautions . . . . . 149

## Example of Reflow Soldering Condition

1. Heating method: Double heating method with infrared heater.
2. Temperature measurement: Thermocouple  $\phi 0.1$  to  $0.2$  CA (K) or CC (T) at soldering portion (copper foil surface). A heat resisting tape should be used for fixed measurement.
3. Temperature profile

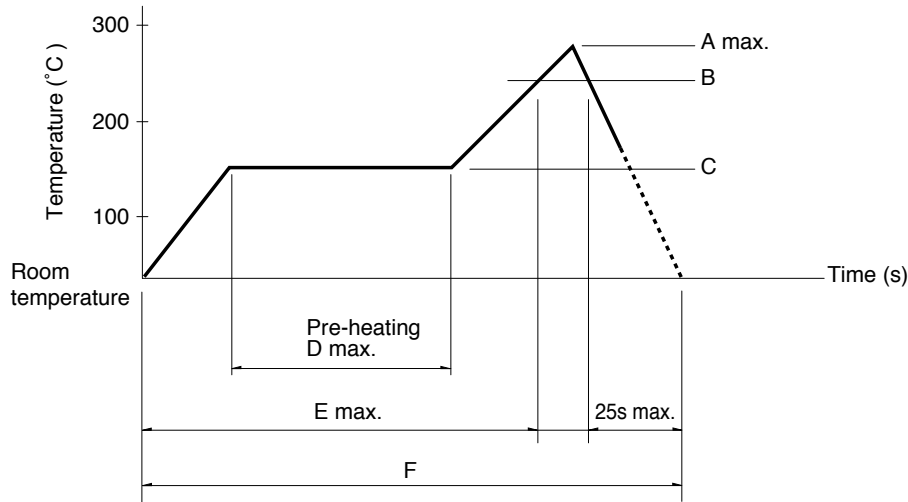

Series (Reflow type)	A (°C) 3s max.	B (°C)	C (°C)	D (s)	E (s)	F (s)
<b>SRBQ</b>	250	200	150±5	80 to 100	—	—

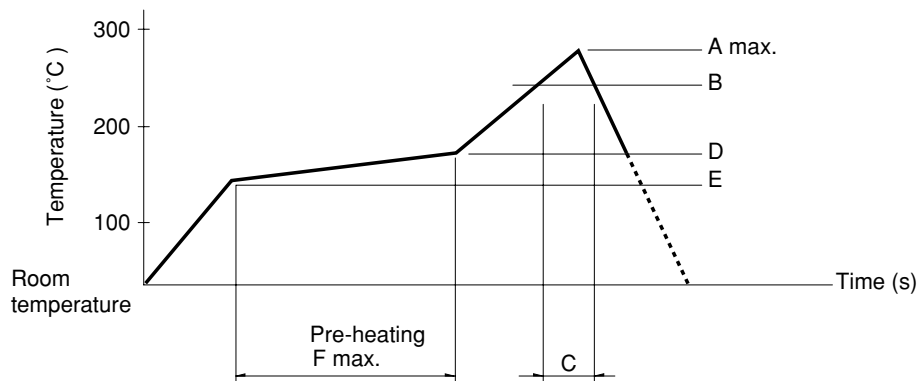

Series (Reflow type)	A (°C) 3s max.	B (°C)	C (s)	D (°C)	E (°C)	F (s)
<b>SRBD</b>	260	230	40	180	150	120

- Notes**
1. The condition mentioned above is the temperature on the mounting surface of a PC board. There are cases where the PC board's temperature greatly differs from that of the switch, depending on the PC board's material, size, thickness, etc. The above-stated conditions shall also apply to switch surface temperatures.
  2. Soldering conditions differ depending on reflow soldering machines. Prior verification of soldering condition is highly recommended.

## Reference for Hand Soldering

Series	Soldering temperature	Soldering time
<b>SRBQ, SRBM, SRBV, SRRM, SRRN</b>	350±10°C	3+1/0s
<b>SRBQ (Reflow type)</b>	350±5°C	3s max.

## Reference for Dip Soldering

(For PC board terminal types)

Series	Items		Dip soldering	
	Preheating temperature	Preheating time	Soldering temperature	Duration of immersion
<b>SRBM</b>	100°C max.	60s max.	260±5°C	5s max.
<b>SRBV, SRRM, SRRN</b>	—	—	260±5°C	10±1s
<b>SRBQ</b>	—	—	260±5°C	5±1s

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренеспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)