

## Type BDS100 Series

### Key Features

- 100W in a 9.5cm<sup>2</sup> footprint
  - Gives an impressive power density of 10.5W/cm<sup>2</sup>
- Virtually inductance-free
  - Inductance < 40nH
- Wide resistance range: 0.47Ω to 1MΩ
  - Coupled with 1% tolerance gives ultimate design flexibility
- Multiple terminal configurations and multi-resistor packages
  - The space saving solution
- Partial discharge <10pC at 2kV
  - Guaranteeing quality, reliability and long life

### Applications

- Snubbing (Low inductance)
- Balancing Resistor (Multi-resistor package)
- Filter (Low inductance)
- High Voltage
- High Frequency



With less than 40nH inductance and a 100Watt power rating in an easy-mounting 38mm x 25mm Isotop case, the BDS100 offers high power density over a wide range of ohmic values (R47 – 1MΩ) and benefits from 10 years experience in the field. Available in 6 resistor configurations with 2 or 4 easy to connect terminals, the resistors are made from quality materials for optimum reliability and stability with very low partial discharge.

TE Connectivity can test resistors to conform to relevant customer specifications, and will advise on the use of resistors for pulse energy and high voltage applications (HV designs available). Resistors with alternative terminations or flying leads are available, and custom designs are welcome. This product is available via distribution.

### Characteristics -Electrical

<b>Resistance Range:</b>	R47 - 1MΩ	
<b>Resistance Tolerance:</b>	± 10%, 5% (Tighter by discussion)	
<b>TCR:</b>	R<1Ω	± 250ppm/°C
	R>1Ω	± 150ppm/°C
<b>Rated Power:</b>	Heatsink: 115°C / 100°C / 60°C	25W / 50W / 100W
<b>Capacitance:</b>	Parallel	15pF
		To Earth 40pF
<b>Series Inductance:</b>	40nH (Maximum)	
<b>Limiting Element Voltage:</b>	(100W or Less)	500Vdc/ac rms
<b>Isolating Voltage:</b>	(Terminal to Heatsink)	2.5kVac rms
<b>Single Shot Voltage:</b>	1.5/50ms	4kV
<b>Insulation Resistance:</b>	(at 500V dc)	>100GΩ
<b>Partial Discharge:</b>	at 2kV	<10pC
<b>Heat Dissipation:</b>	Although the use of proprietary heat sinks with lower thermal resistance is acceptable, up rating is not recommended. The use of proprietary heat sink compound to improve thermal conductivity is essential.	

### Characteristics - Environmental


<b>Endurance (Rated Power):</b>	2000cyc. at P <sub>Rated</sub>	ΔR 0.25% Typ
<b>Humidity Load Life:</b>	56 Days, 40°C, 95% RH	ΔR 0.25% Typ (I.R.>10GΩ)
<b>Temperature Cycling:</b>	-55°C to +125°C, 5cycles	ΔR 0.25% Typ
<b>Operating Storage Temp:</b>	-55°C to +125°C	
<b>Short Term Overload:</b>	3 x P <sub>Rated</sub> (10s)	ΔR 0.25% Typ
<b>Vibration:</b>	10/500Hz	ΔR 0.25% Typ
<b>Bump:</b>	40g 4000 bumps	ΔR 0.25% Typ

## Type BDS100 Series

### Characteristics - Mechanical

<b>Terminal Size:</b>	M4
<b>Terminal Torque (max.):</b>	1.3Nm
<b>Creepage Distance:</b>	10mm
<b>Clearance:</b>	Terminal to Heatsink Terminal to Terminal
	10mm 3mm
<b>Heatsink Surface Finish:</b>	R <sup>a</sup>
	< 6μm
<b>Heatsink Flatness:</b>	0.05mm
<b>Weight:</b>	35g

### Dimensions

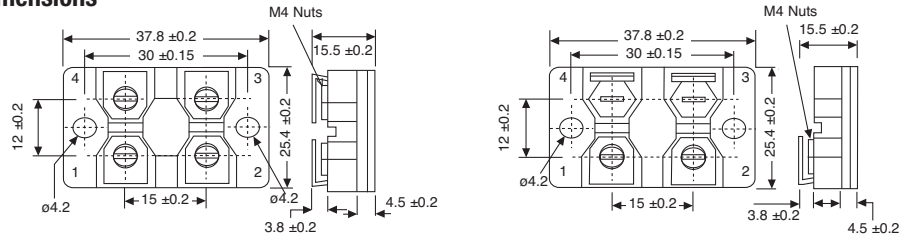


### Terminal Circuit Type

A (Standard)




B (Voltage Sense)




C (Special)




D (Isolated)




E (Network Tapped)




F (Network 3 Res.)

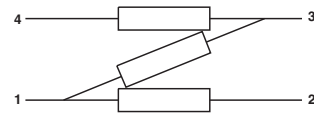

### Derating Curve

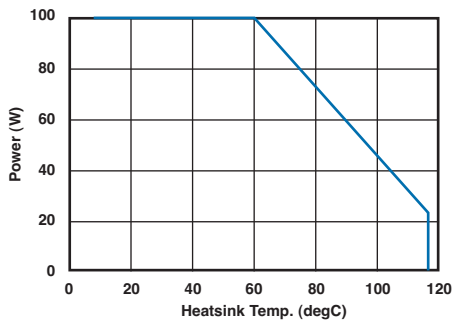

### Pulse Energy

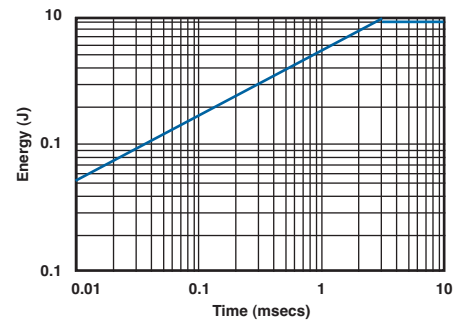

### How to Order

BDS 2	A	100	1K0	J
<b>Common Part</b>	<b>Circuit Type</b>	<b>Power Dissipation</b>	<b>Resistance Value</b>	<b>Tolerance</b>
BDS 2 (2 Terminal) BDS 4 (4 Terminal)	A: Standard B-F: See above	100 - 100 Watts at 70°C	0.6Ω (600mΩ) R60 1Ω (1000mΩ) 1R0 1KΩ (1000Ω) 1K0 1MΩ (1000000Ω) 1M0	F - 1% J - 5% K - 10%

TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks.

Other logos, product and Company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this datasheet, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this datasheet are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)