NOTES:
1. MATERIALS OF CONSTRUCTION:
   BODY, RETAINER RING, SHELL, TOP HAT & HEX NUT = BRASS, NICKEL PLATED (.000100 MIN THICK)
   INSULATORS (2) = PTFE MIL-P-19468
   FEMALE CONTACT - BERYLLIUM COPPER, GOLD PLATE (.000030 MIN THICK)
   MALE CONTACT - BRASS, GOLD PLATE (.000030 MIN THICK)
   GASKET = SILICONE RUBBER, COLOR RED
   SPRING = SK5, NICKEL PLATE (.000200 MIN THICK)
   WASHER = BRASS, NICKEL PLATE (.000100 MIN THICK)
2. ELECTRICAL:
   A. FREQUENCY RANGE: DC - 1.0 GHz
   B. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS
   C. VOLTAGE RATING: 350 V PEAK
   D. INSULATION RESISTANCE: 5000 MEGOHM
   E. INTERNAL CONTACT(S) RESISTANCE: 2.5 MILLIOHMS
   F. OUTER CONTACT(S) RESISTANCE: 1.5 MILLIOHMS
3. MECHANICAL:
   A. LONGITUDINAL: 5 LB. MAX
   B. TORQUE: 3.5 IN-LB. MAX
4. PACKAGING:
   A. QUANTITY: SINGLE PACK
   B. MARKING: BAG TO BE MARKED
      "AMPHENOL, 31-6116, AND DATE CODE"
5. CONTACT PIN TO SOLDER

THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE FOR MFG	8/13/03	44585	CPM
B	NOTE 2B WAS 4.0 GHz	3/18/04	44861	CPM
C	SYNCH THE DRAWING WITH DANBURY	07-Jun-12	49108	SH

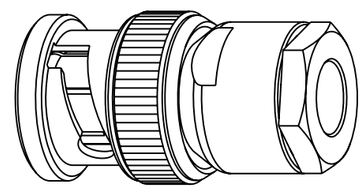

SCALE 2.000

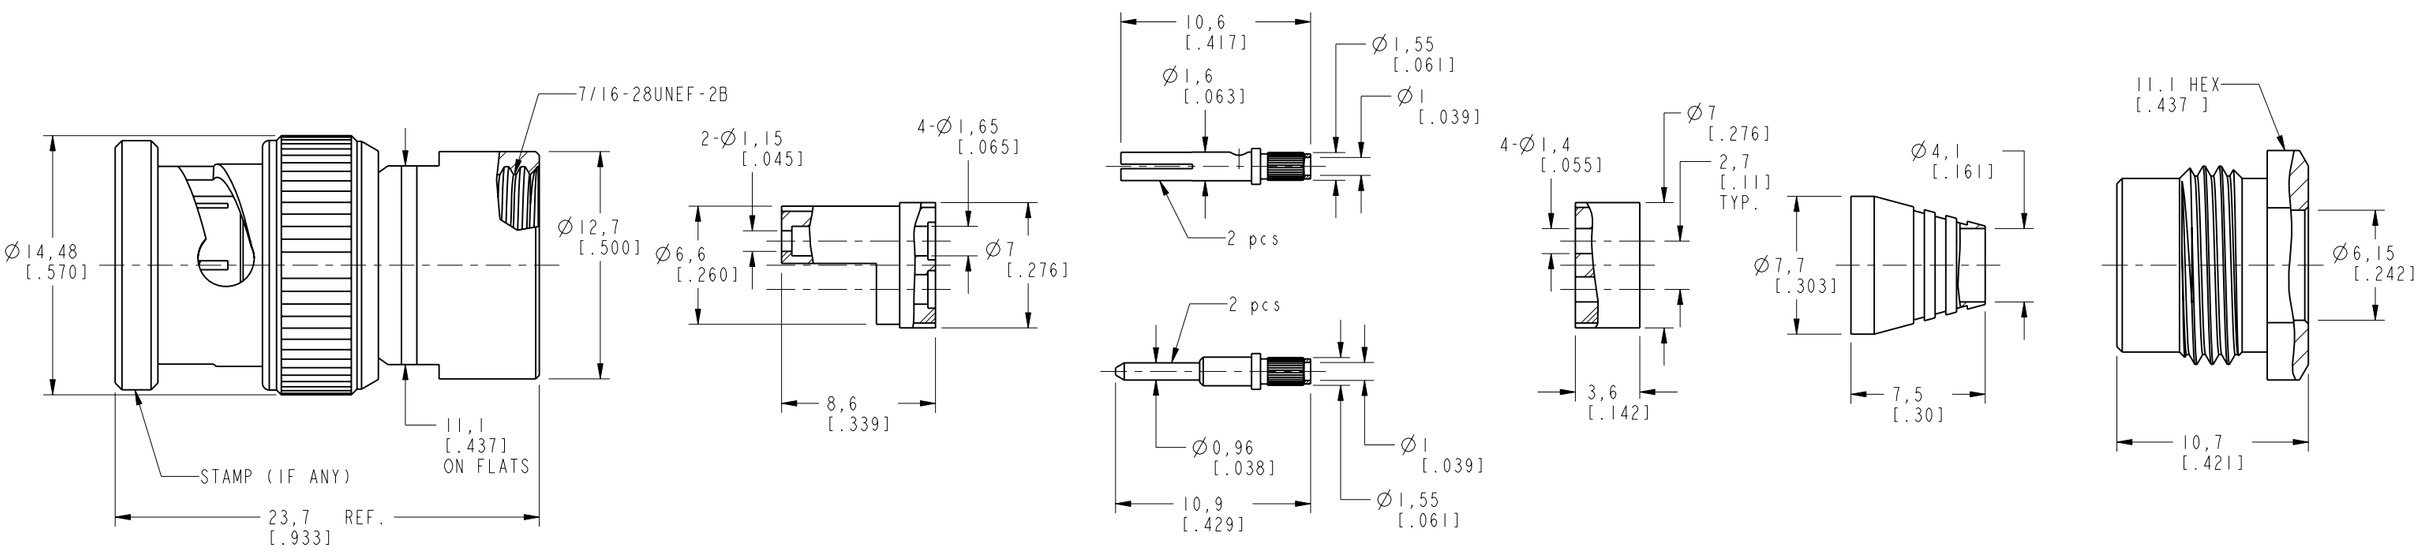

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:
2 PLACE DECIMAL ±.015 (0,381 mm) 3 PLACE DECIMAL ±.005 (0,127 mm) ANGLES ± 1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL

REFERENCE
EAR# 1068
GEN# ASSYMI_BNCQUAD
AGILENT# 1251-3452

FINISH

DRAWN R.MAO	DATE 31-May-12	
ENGINEER O. BARTHELMES	DATE 8/6/03	
APPROVED S.HSIEH	DATE 31-May-12	
CAD FILE		

TITLE
BNC FOUR-CONTACTS
CLAMP PLUG

SCALE: 3.0:1.0 SHEET 2 OF 2
DWG SIZE B REV C

Amphenol RF
www.amphenolrf.com

DRAWING NO. TWB1141B1-001-NT30G
ITEM NO. 241141AAAAINC0F
PART NO. 31-6116

ООО «ЛайфЭлектроникс» “LifeElectronics” LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru