


# IDK-065R-64VGA1

## 6.5" VGA Industrial Display kit with Touch Solution

NEW

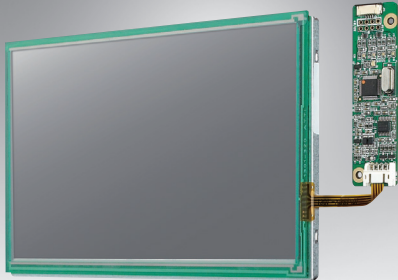

### Features

- 6.5" LCD supports 640 x 480 pixels and wide operating temperature (-5~ 60° C)
- Brightness of 800 cd/m<sup>2</sup> with LED backlight
- 4-wire resistive touch solution
- High contrast ratio of 600:1
- High uniformity of 85%
- LVDS signal interface
- Low power consumption 3.86 W (panel only)
- LED driver board built in
- Touch controller included (USB)
- AR surface treatment (optional)
- Optical bonding (optional)

### Introduction


The Advantech IDK-065R series comes with a 6.5" industrial grade LCD display with 4-wire resistive touch. The series is also available with flexible options for LCD screens enhanced treatment such as Anti-Reflection surface treatment and optical bonding solution. IDK-065R series supports 4-wire resistive touch with low power consumption at the maximum of 3.86 W. IDK-065R series is ideal for embedded applications which customers have maximum flexibility for mechanical design.

### Specifications

LCD Panel	Display Size	6.5" LED backlight panel (VGA)
	Resolution	640 x 480
	Viewing Angle (U/D/L/R)	70° / 70° / 80° / 80°
	Brightness	800 cd/m <sup>2</sup>
	Backlight Life (hrs)	50,000 hrs
	Contrast Ratio	600 : 1
	Response Time (ms)	25 ms
	Colors	6 Bit (262K)/8 bit (16.2 M)
	Voltage	3.3 V Power
	Consumption	3.86 W
	Signal Interface	1 channel LVDS
	Weight	TBA
	Dimensions (W x H x D)	152.9 x 120 x 13.17 mm
Touch Screen	Touch Screen	4-wire Resistive
	Transparency	82.5± 2.5%
	Surface Hardness	3H
	Durability	1 million times
Environment	Operating Temperature	-10 ~ 60° C
	Storage Temperature	-30 ~ 70° C
	Humidity	10 ~ 90% @ Max. 38° C, non-condensing

## Dimensions

Unit: mm

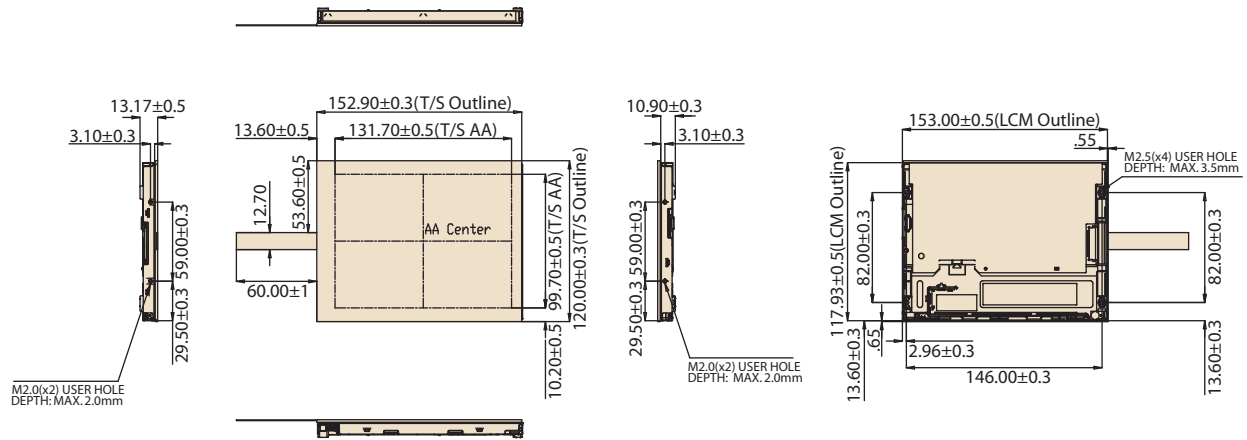

Note: Tolerances unless marked are  $\pm 0.5$ mm

## Ordering Information

Part No.	Size	Brightness (cd/m <sup>2</sup> )	Interface	Touch screen	Touch Interface
IDK-065R-64VGA1	6.5"	800	LVDS	4-wire Resistive	USB

## Packing List

Part Number	Description
9680002154	1 x 4-wire USB Touch controller
1700004131	A Cable 1 x 10P-2.0/USB-A(M) 180CM C=B
1700005912	A Cable 2 x 4P-2.54/1*4P-2.54 10CM

Note: Package contents are subject to change without prior notice

For more compatible embedded board solution, please visit our Build Your display web page as bellow  
<http://www.advantech.com/buildyourdisplay>

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)