


Stop Switch, Series 51

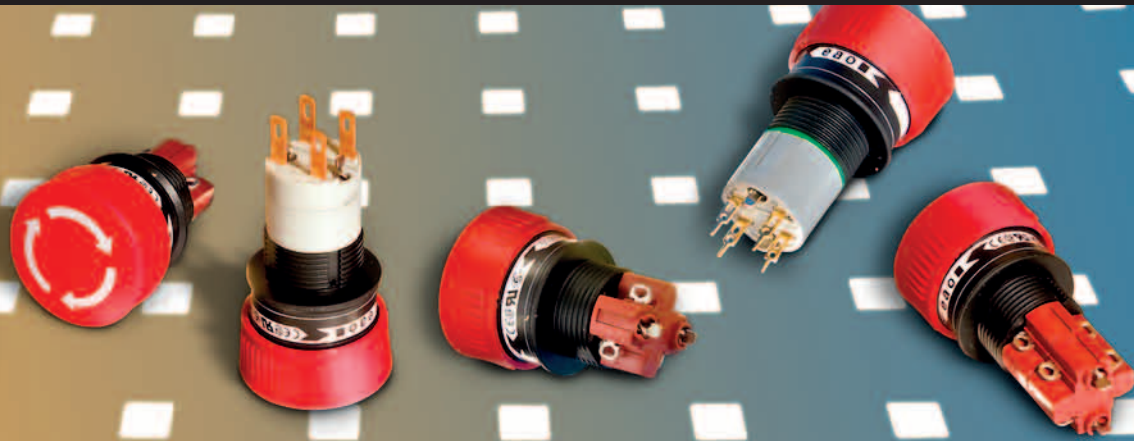

EAO – the expert partner for Human Machine Interfaces – has launched a new compact stop switch with an ultra-low, less than 19mm back panel depth. The new Series 51 Stop Switch utilises a mono block design with an integrated switching element to set a new space-saving standard for industry.

The mono block design minimises the back panel depth and offers an extremely rugged construction that protects the switch from damage caused by heavy-handed use, or operator abuse. The ground-breaking design has been tested beyond 100,000 actuations, so it's a genuine fit-and-forget product.

Main features

- Back panel depth of only 18.8mm, with solder terminal version S16
- Choice of connection methods: solder, plug-in or PCB mount
- Visible actuation status
- Attractive and ergonomic design
- Protected to IP65 from the front

Mounting

16 mm Ø mounting hole

Typical applications

This compact, cost effective switch is suitable for equipment that requires a reliable, rugged and attractive stop switch for non-hazardous application including:

- Medical diagnostic equipment
- Hand held terminals
- Machine and process controls
- Instrumentation
- Disabled lifts
- Supermarket check-outs

Switching system

- Switching element with solder connection
 - Self-cleaning, double-break snap-action switching system
 - 1 NC contact and 1 NO contact per switching element
 - Available with up to two switching elements (2 NC contact and 2 NO contact)
- Switching element with 2.8mm plug-in/solder connection
 - Self-cleaning, double-break snap-action switching system. (1 NC contact and 1 NO contact)
- Low signal level switching element with 2.0mm plug-in, solder or PCB mount connection.
 - Single-break momentary contact switch system. Two contacts per switching element with a combination of NC and NO contacts

Material

Actuator housing	Polyamide (PA66), Thermoplastic elastomer (TPE)
Lens	Polyamide (PA6)
Actuator	Polybutylene Terephthalate (PBT)
Label	R-640 polyester

Switching element

Solder connection:	Polyamide (PA 6.6)
Plug-in/solder connection:	Diallyl Phthalate (DAP), Polyamide (PA), Polysulfone (PSU)
Plug-in/solder/PCB connection:	Polysulfone (PSU)

Contact material

Snap action solder connection:	gold-plated silver
Snap action plug-in/solder connection:	gold-plated silver
Low level plug-in/solder/PCB connection:	gold-plated

Mechanical properties

- Connections
 - Solder or solder/plug connection, 2.8×0.5 mm
 - Universal connection with 2.0×0.5 mm plug-in/solder and PCB connection
- Actuating force: 4 ... 6 N (depending on the switching element)
- Mechanical lifetime: 100,000 switching cycles

Electrical properties


- | | |
|-----------------------------|---|
| Solder element: | min. 5 VAC/DC, 1 mA
max. 250 VAC/DC, 5 A |
| Plug-in/solder element: | min. 5 VAC/DC, 1 mA
max. 250 VAC/DC, 5 A |
| Plug-in/solder/PCB element: | min. 100 µV/10 µA
max. 42 VAC/DC, 100 mA |

Environmental conditions


- Temperature:
 - Storage temperature: –40 °C ... +85 °C
 - Operating temperature: –25 °C ... +55 °C
- Degree of front protection: IP65
- Approvals: UL pending, CSA, CB, ENEC (EN 61058-1)
- Declaration of conformity: CE

Versions


Solder connection




Solder connection




Plug-in/solder connection



Plug-in/solder/PCB connection



Drilling pattern

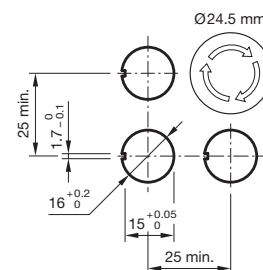

3D product drawings are available in a range of formats to download from our website www.eao.com

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru