

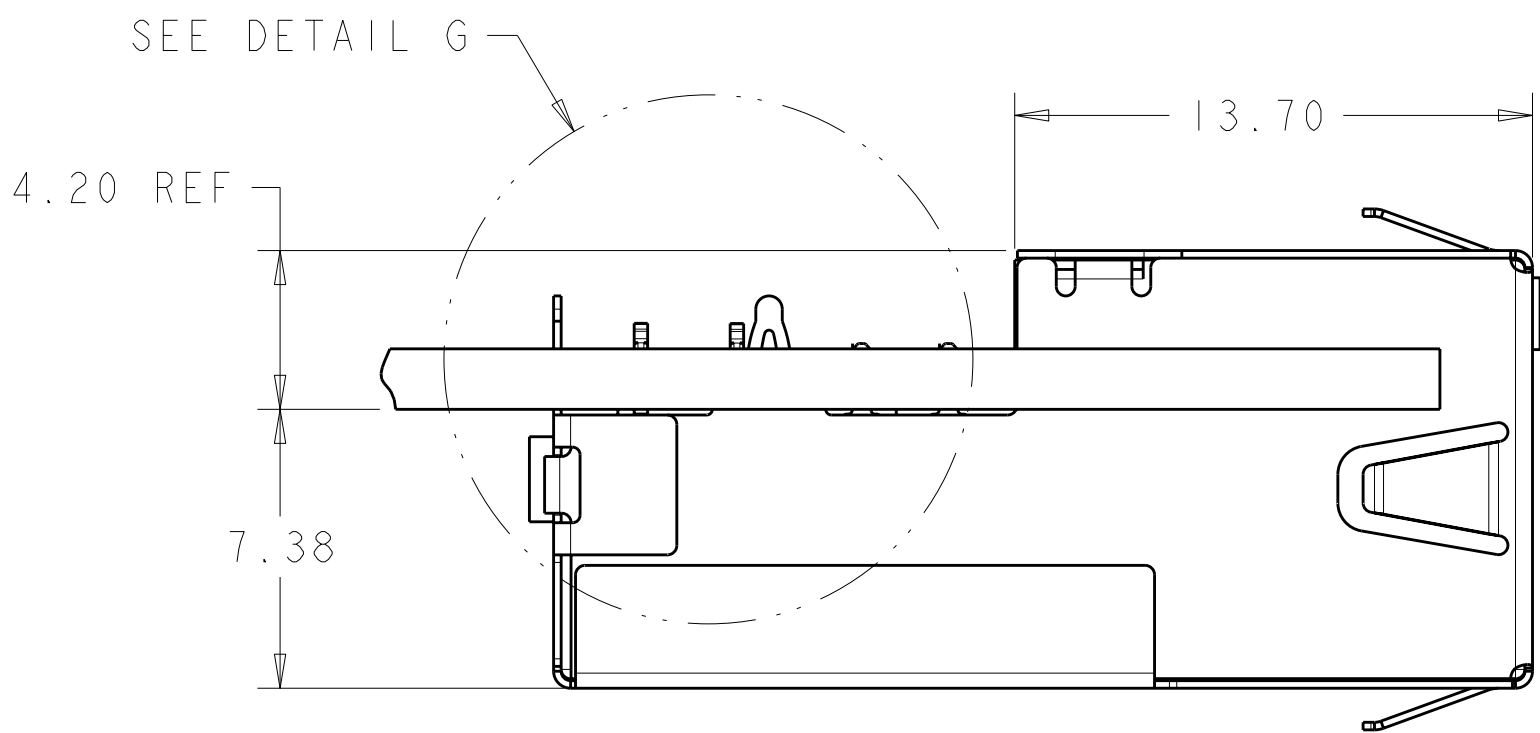
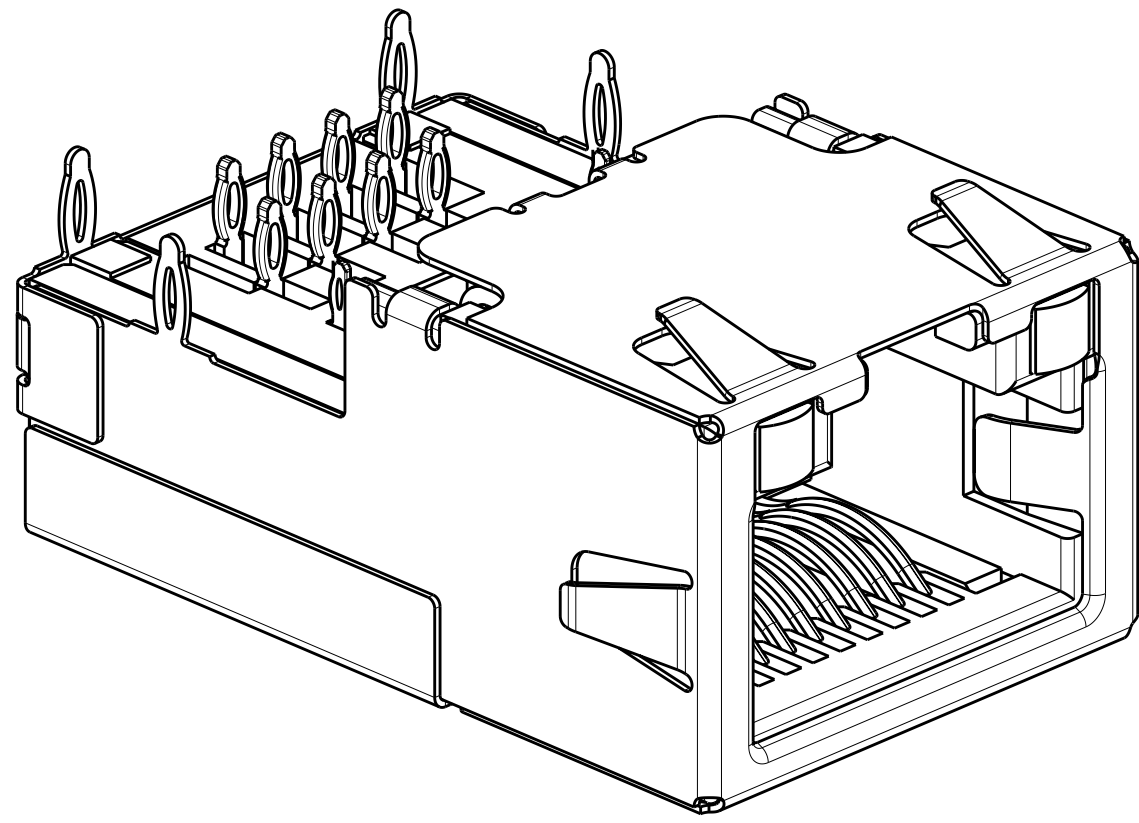
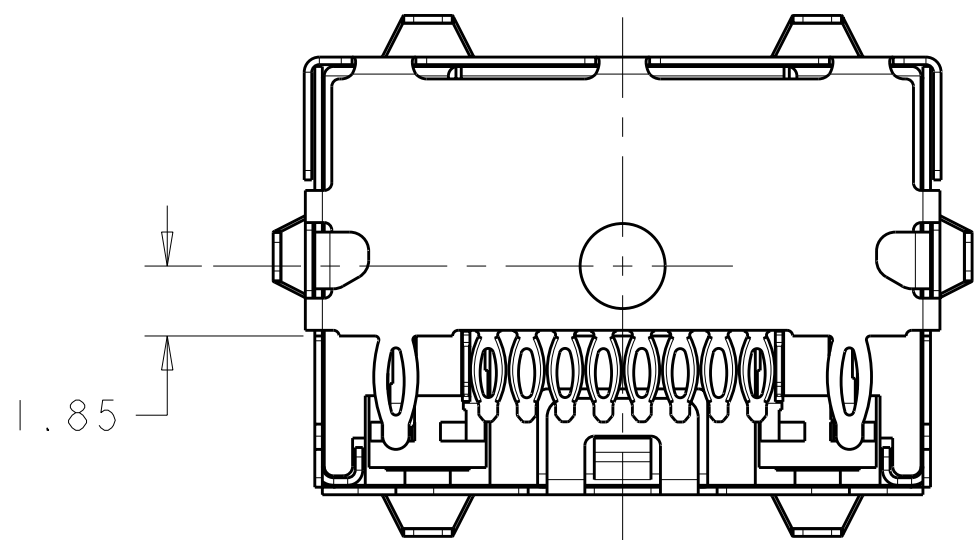
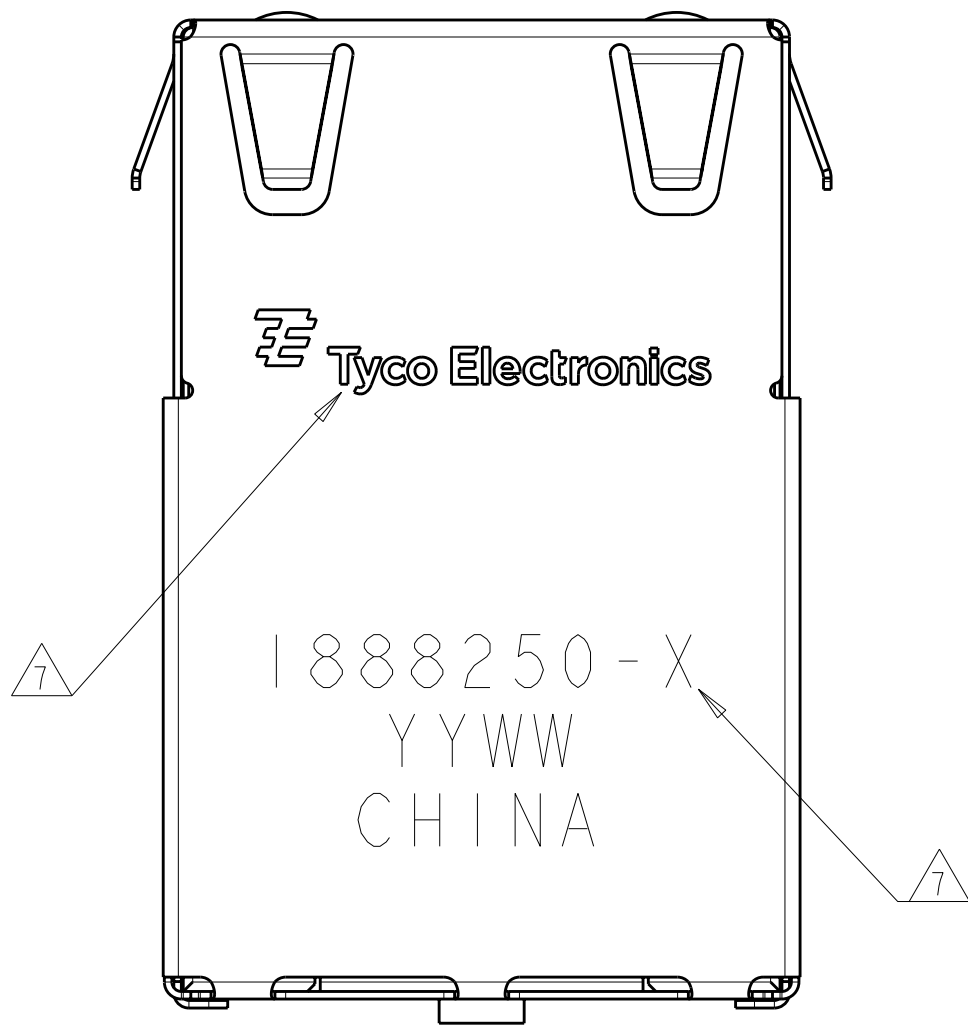


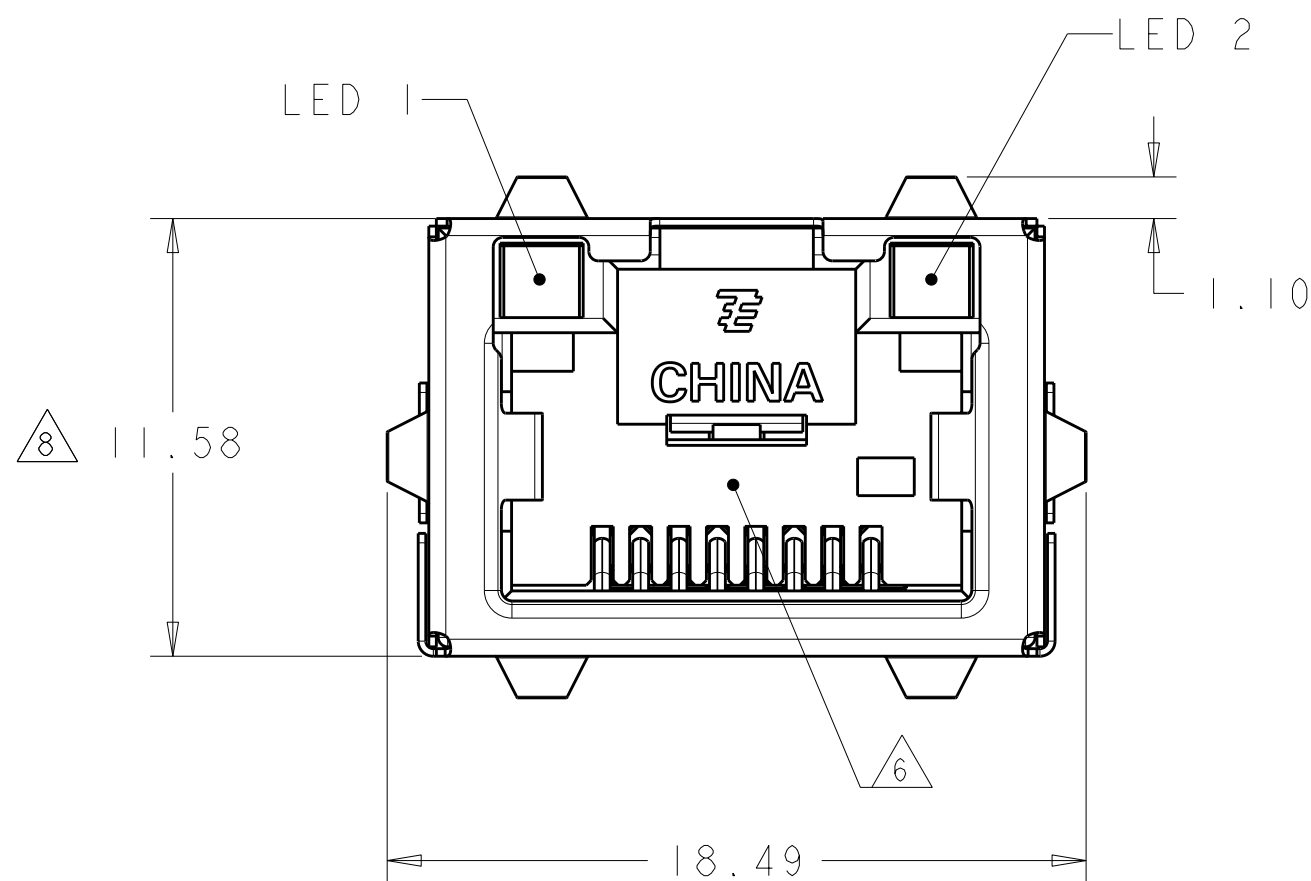


VIEW SHOWN ASSEMBLED
TO PCB ONLY

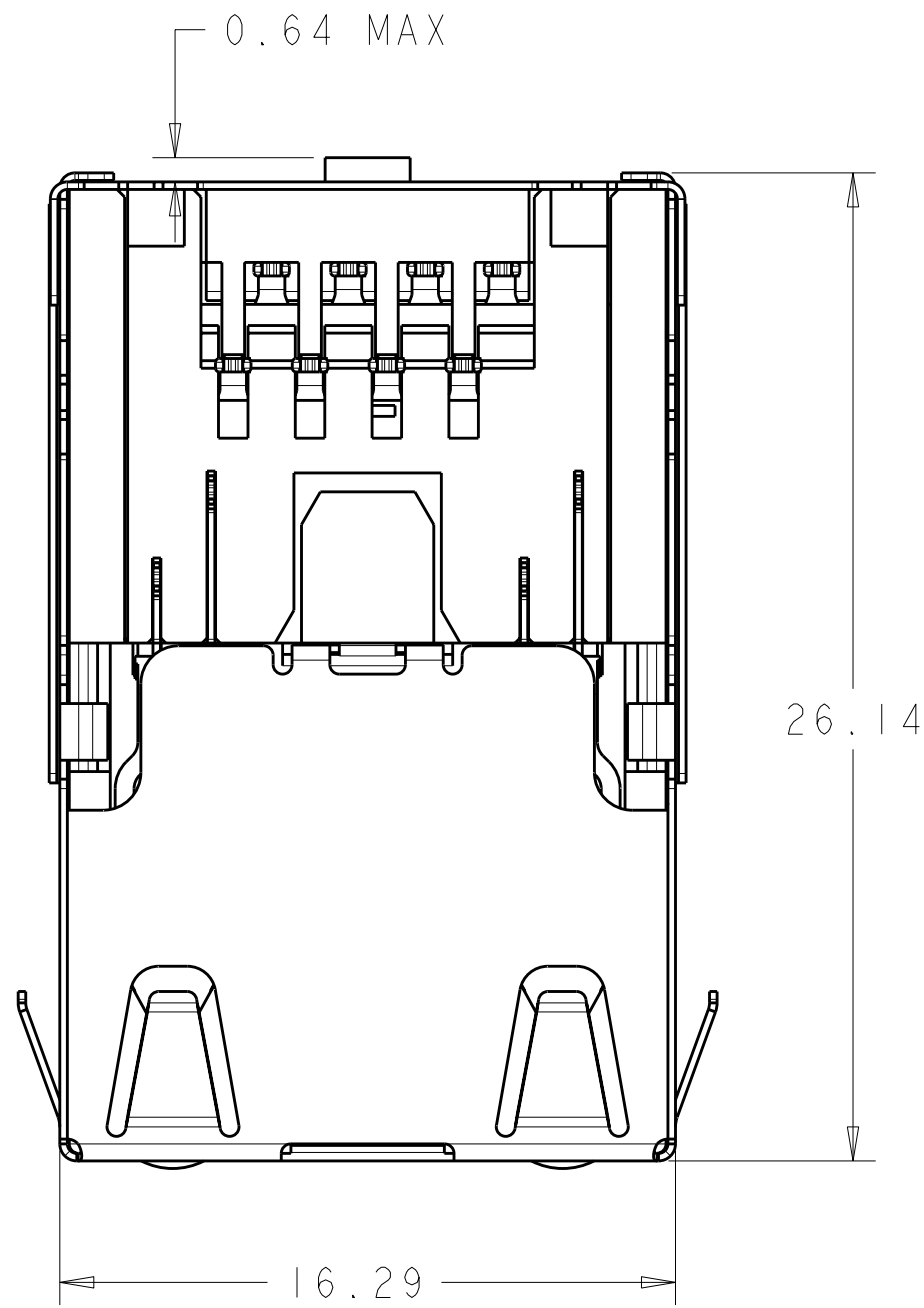

- MATERIALS:
HOUSING: BLACK THERMOPLASTIC, 94V-0.
SHIELD: COPPER ALLOY WITH 0.76µm MIN NICKEL PLATE
CONTACTS: PHOSPHOR BRONZE WITH 1.27µm MIN GOLD
AT MATING INTERFACE OVER 1.27µm MIN NICKEL
UNDERPLATE.
 - PERFORMANCE:
INSERTION LOSS: 0.4dB @ 100 MHz.
RETURN LOSS: 12.0dB @ 100 MHz.
CROSSTALK ATTENUATION: -43dB MINIMUM @ 100 MHz
CURRENT: 0.6 AMPERE MAXIMUM PER SINGAL CONTACT.
 - LED's COMPLIANT WITH IEC60825-1 SAFETY OF LASER
PRODUCTS WHEN OPERATED AT CURRENT OF 20mA.
 - ALL DIMENSIONS NOMINAL.
 - RECOMMENDED MOTHERBOARD PCB THICKNESS: 1.60±0.16.
- RJ45 PORT CONFORMS TO FCC RULES AND REGULATIONS
PART 68 SUB-PART F.
- TE LOGO, PART NUMBER, DATE CODE AND
COUNTRY OF ORIGIN TO BE MARKED IN APPROXIMATE LOCATION
SHOWN.
- THIS DIMENSION MEETS THE ADVANCED MEZZANINE CARD
(AMC) SPECIFICATION.
- PIN 9,10,11,12 ARE LED LEAD PINS, For 1888250-3, NO
LED INTEGRATED, HOLES ON PCB FOR THESE PINS ARE ONLY OPTIONAL.







LOC	DIST	REVISIONS					
AA	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B5	ECR-11-009822	11MAY2011	JJ	MOW
			C	ECR-12-002445	09FEB2012	JJ	AC

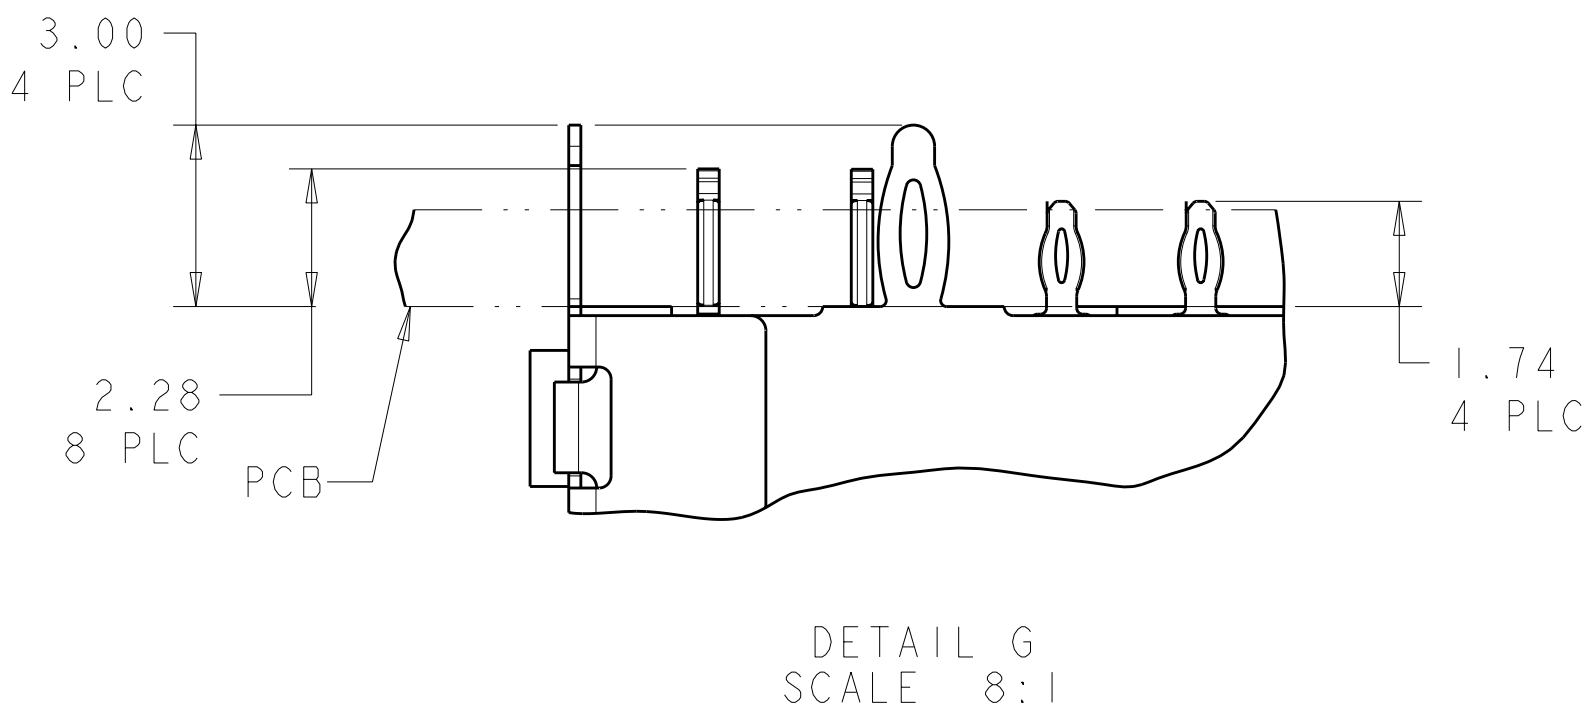

DETAIL G
SCALE 8:1


YELLOW	GREEN	1888250-5
GREEN	GREEN	1888250-4
-	-	1888250-3
GRN/YEL	GRN/YEL	1888250-2
GREEN	YELLOW	1888250-1
LED #1	LED #2	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN MS/L.A.MAYER 15FEB2008	 TE Connectivity	
		CHK J.WESTMAN 15FEB2008		
DIMENSIONS:		APVD S.FLICKINGER 15FEB2008	NAME	
mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	CONNECTOR ASSEMBLY, LOW PROFILE.	
			PRESS FIT, MODULAR JACK, 1X1, RJ45	
	0 PLC ±.1 1 PLC ±.1 2 PLC ±0.13 3 PLC ±.1 4 PLC ±.1 ANGLES ±°	PRODUCT SPEC 108-2274 APPLICATION SPEC 114-13179	SIZE	
			CAGE CODE DRAWING NO	
MATERIAL	FINISH	WEIGHT	RESTRICTED TO	
			A100779C=1888250	
SEE NOTE 1		CUSTOMER DRAWING		SCALE 1:1 SHEET 1 OF 3 REV C

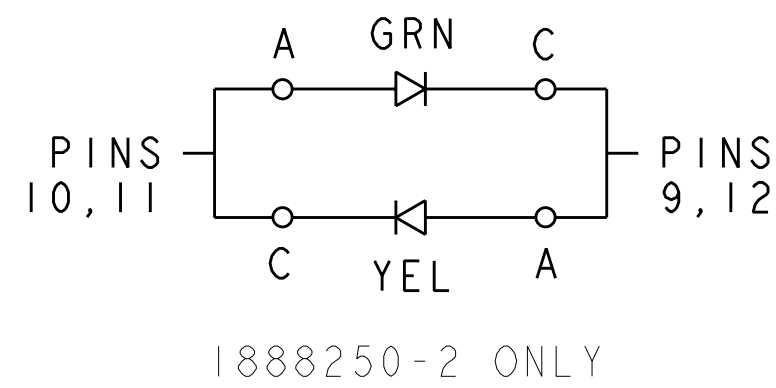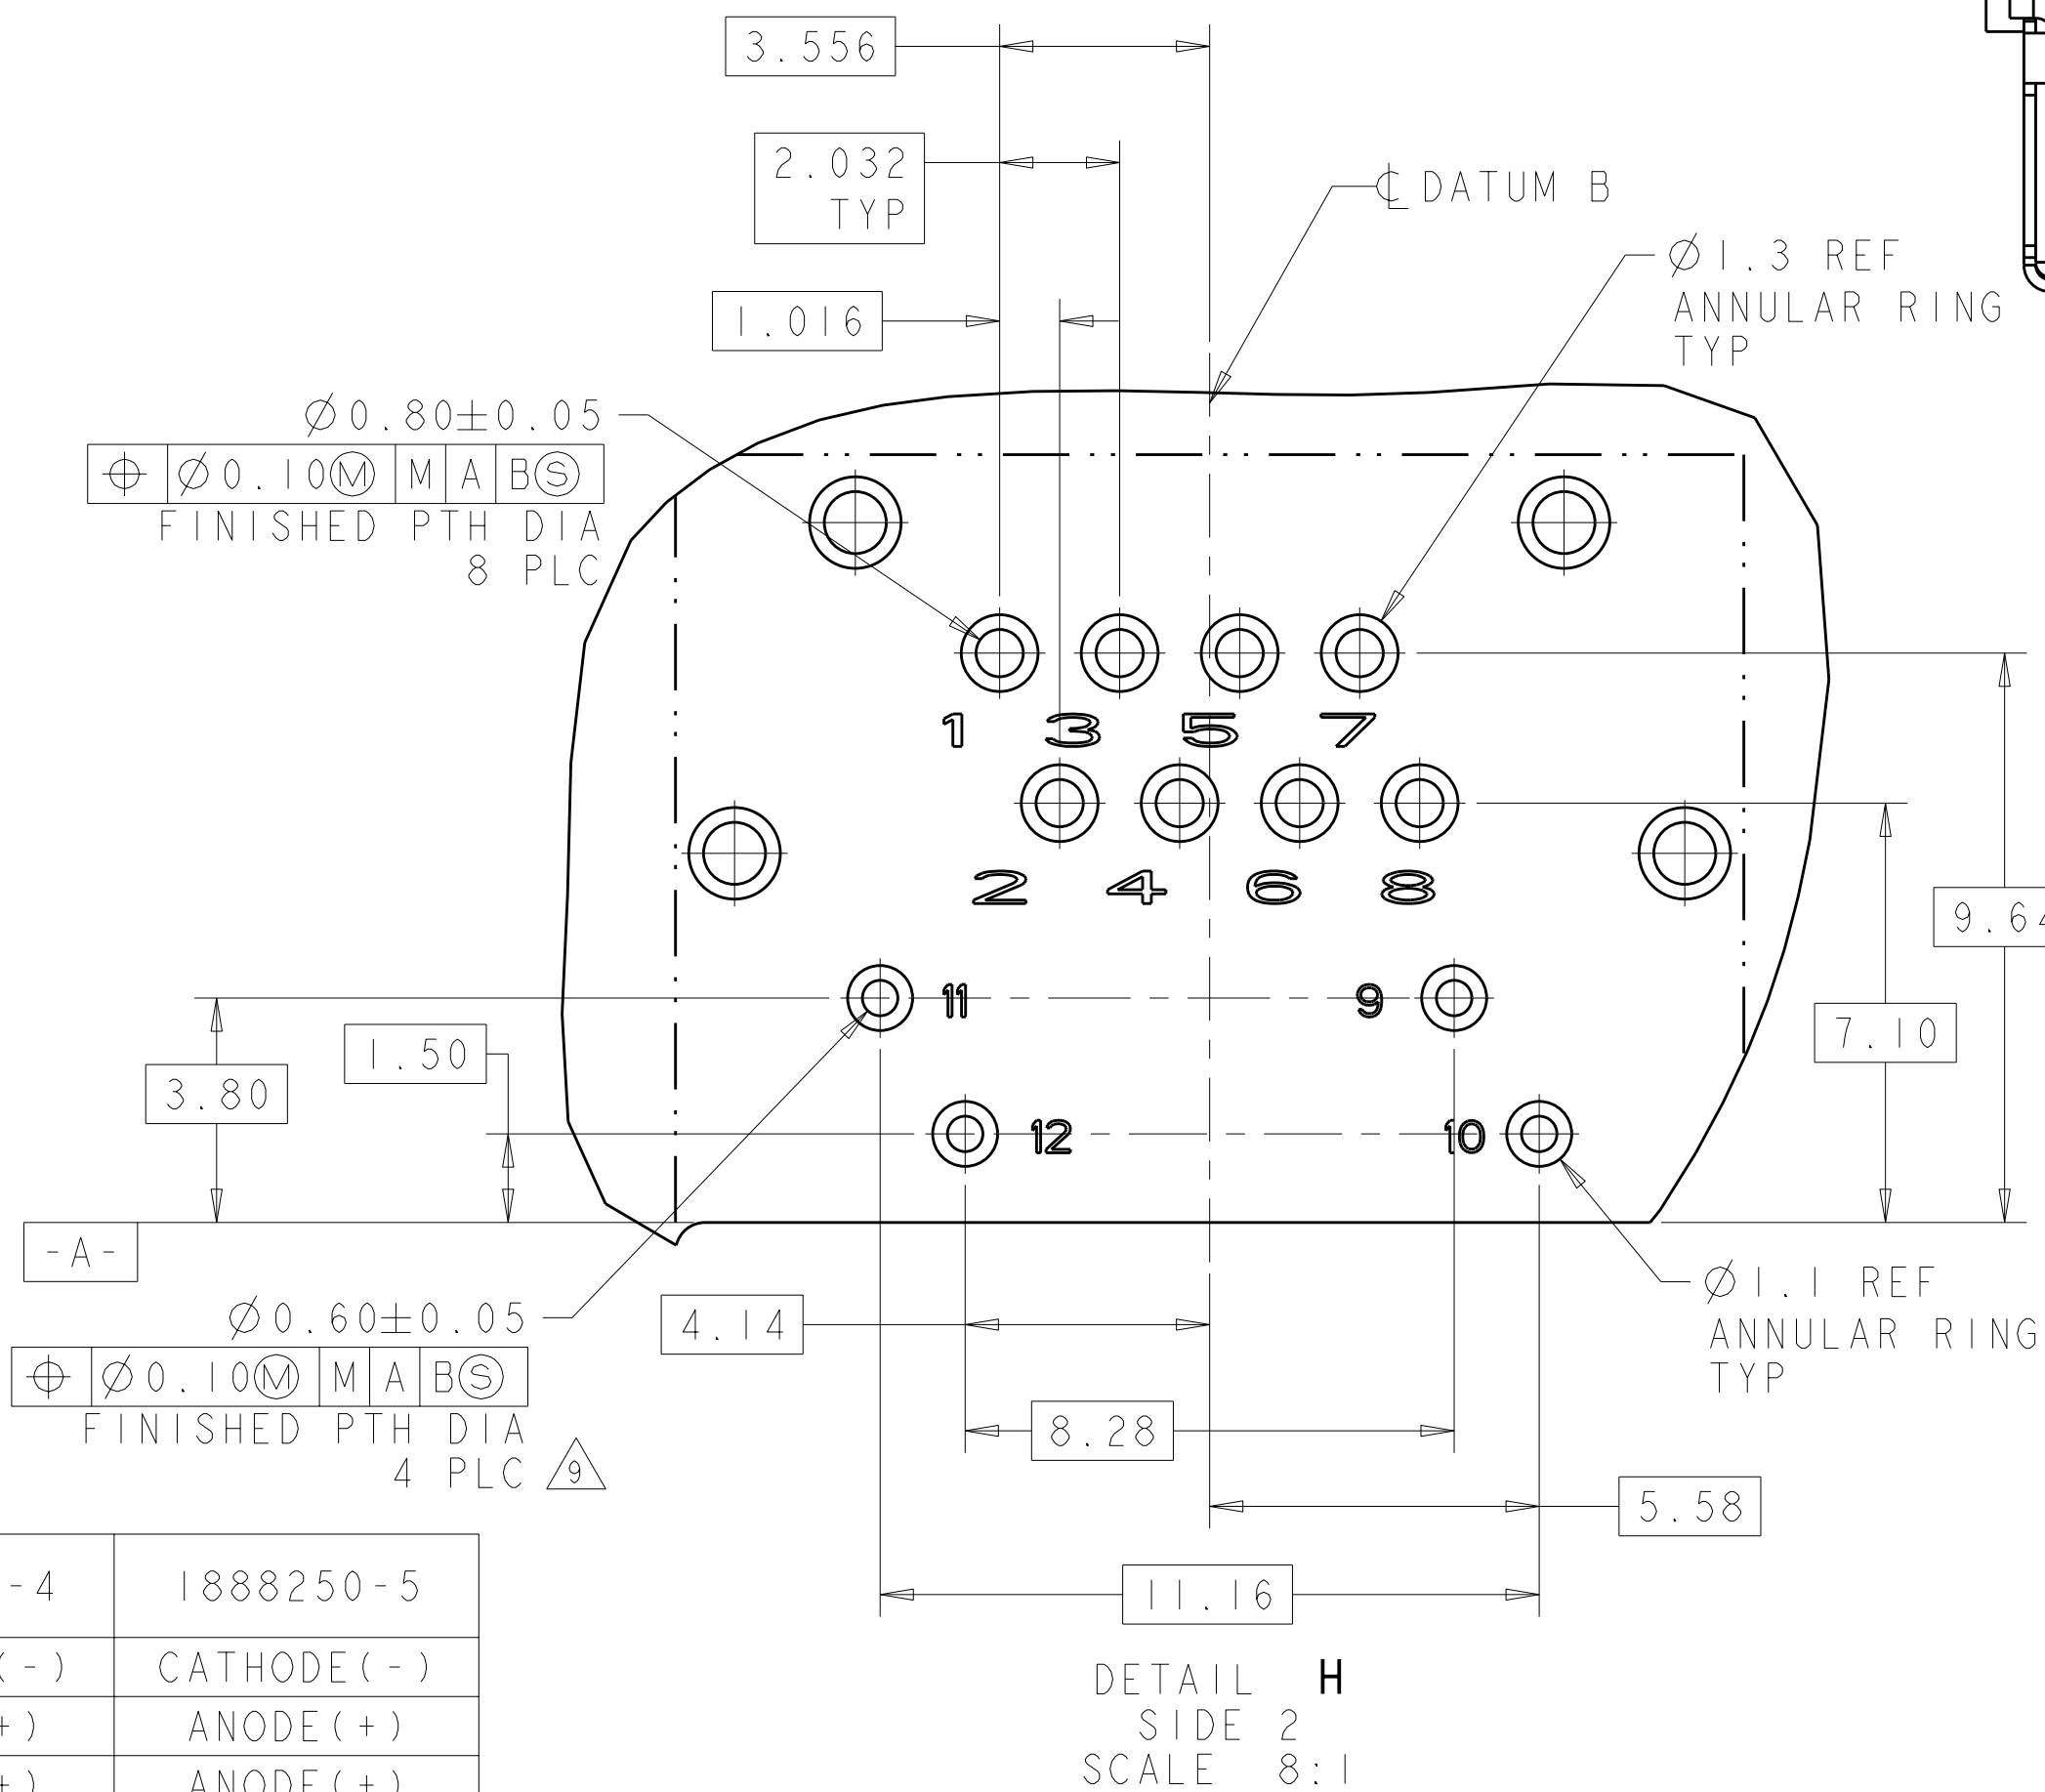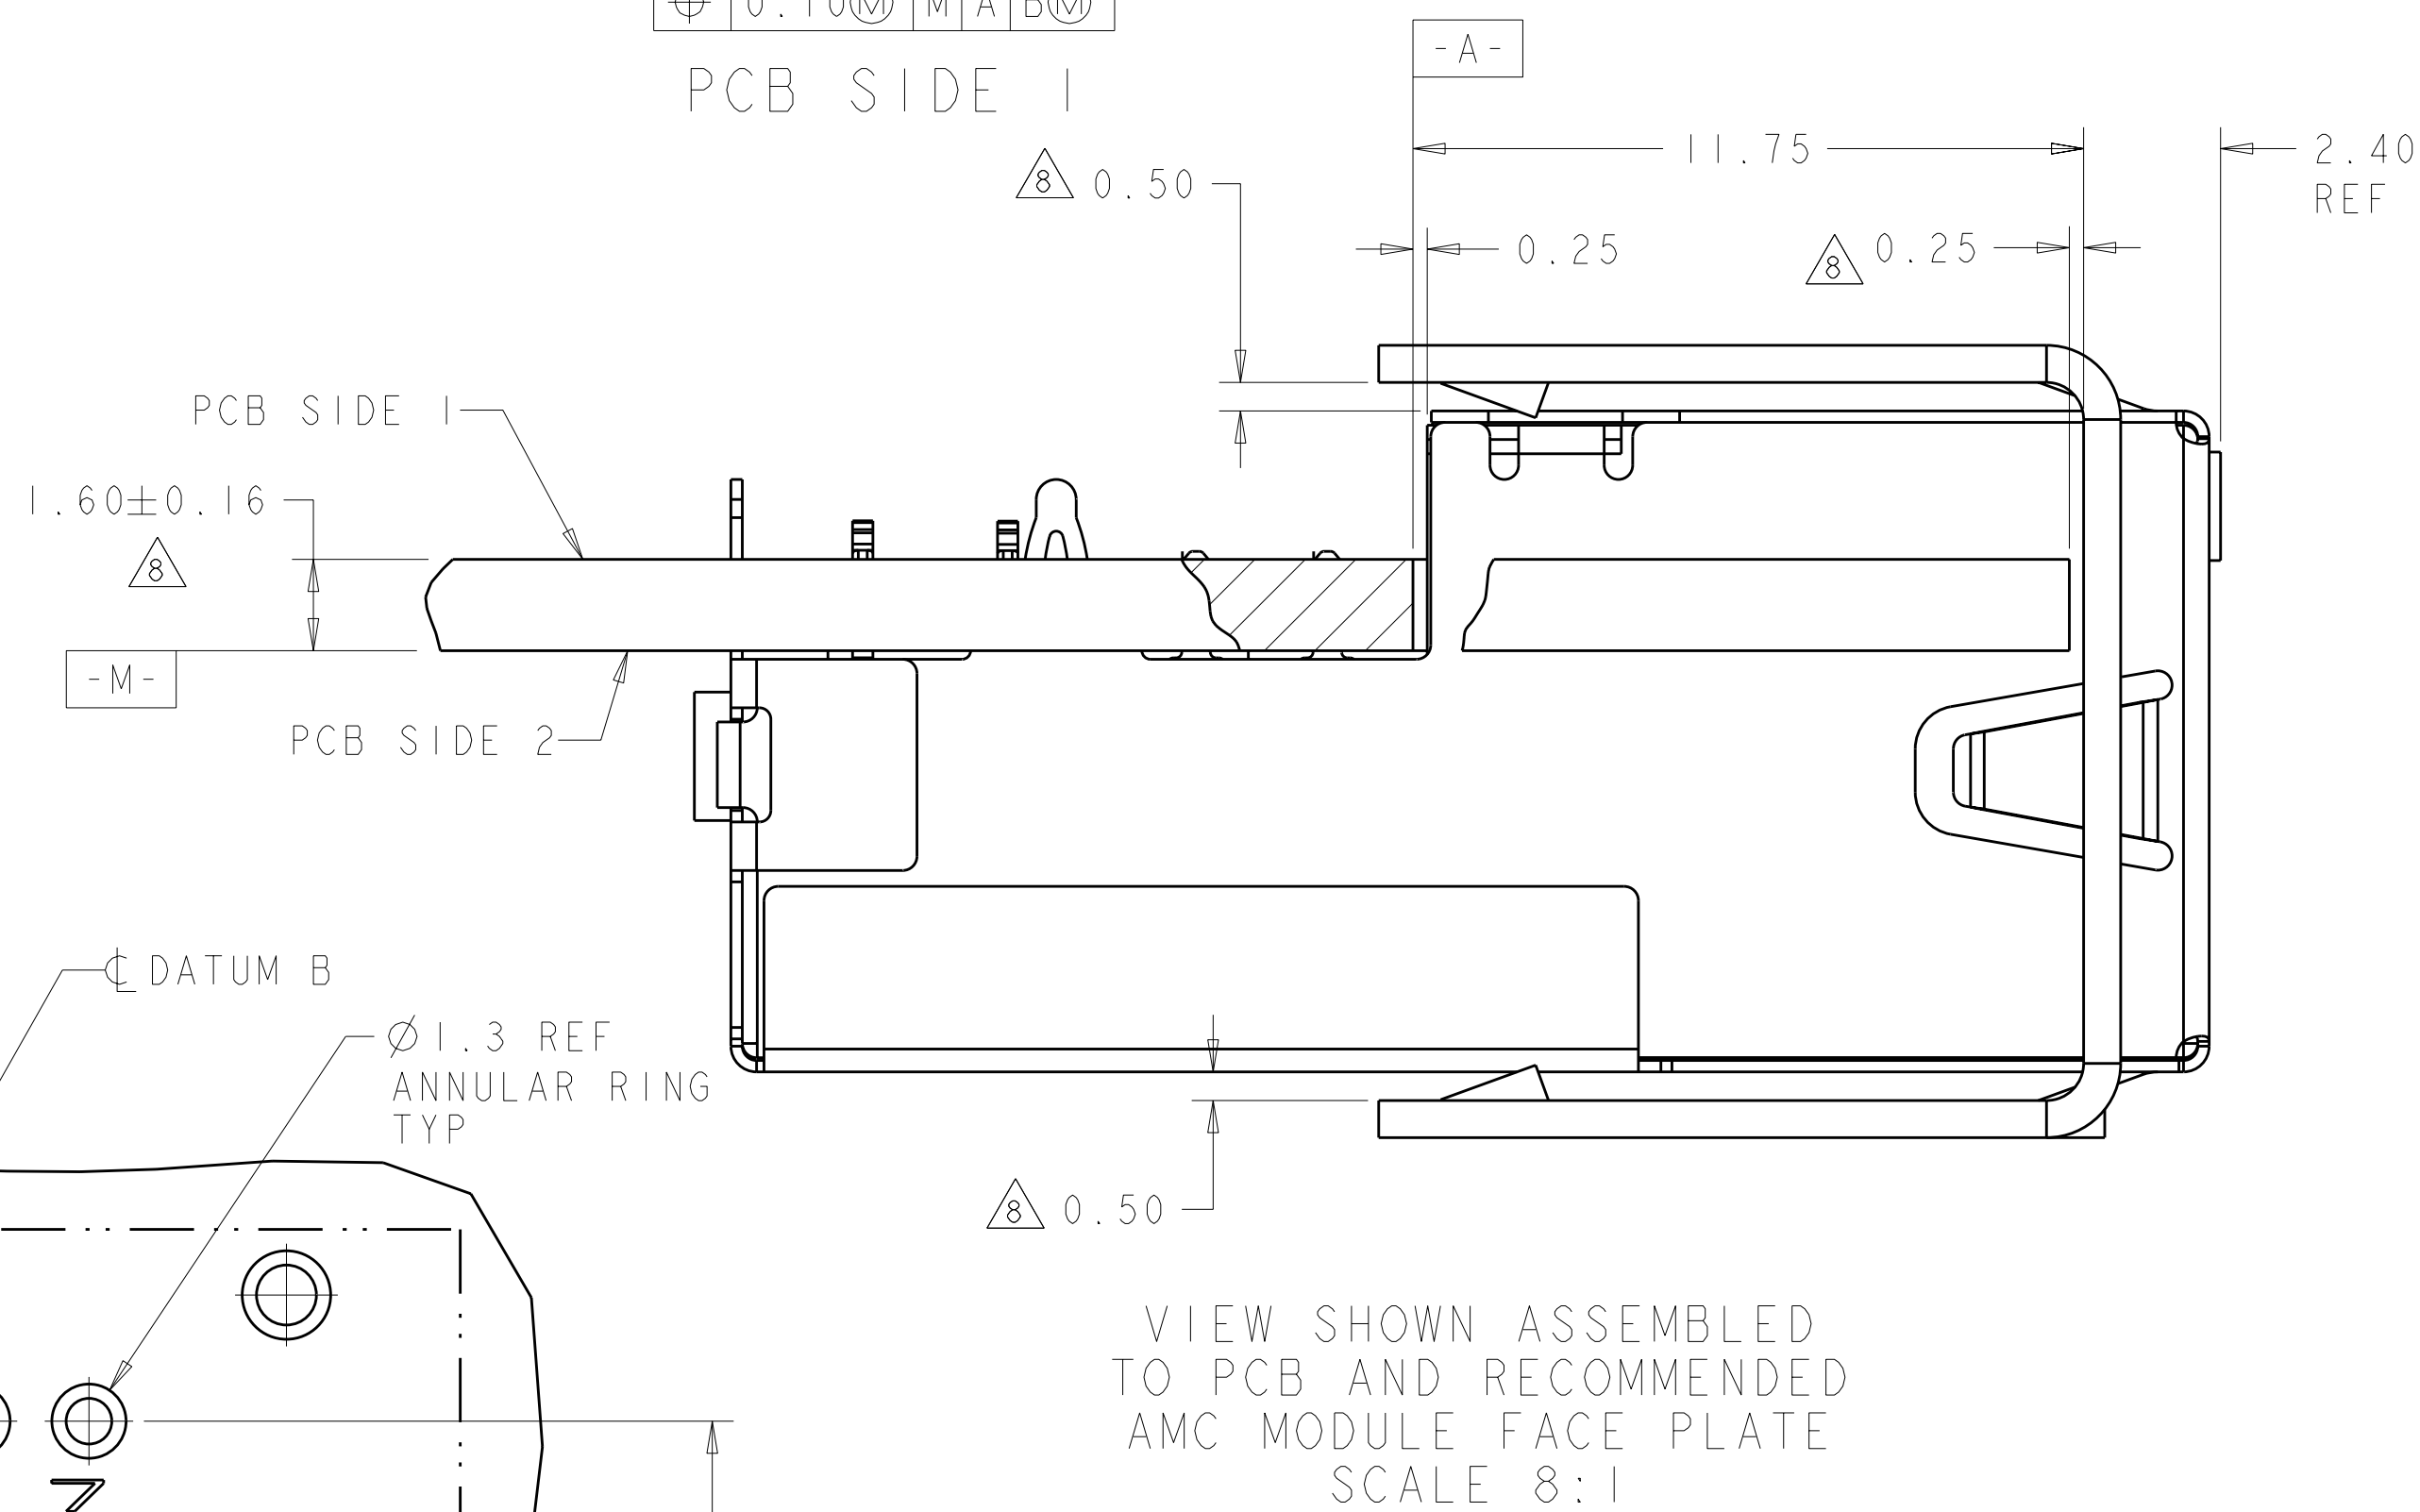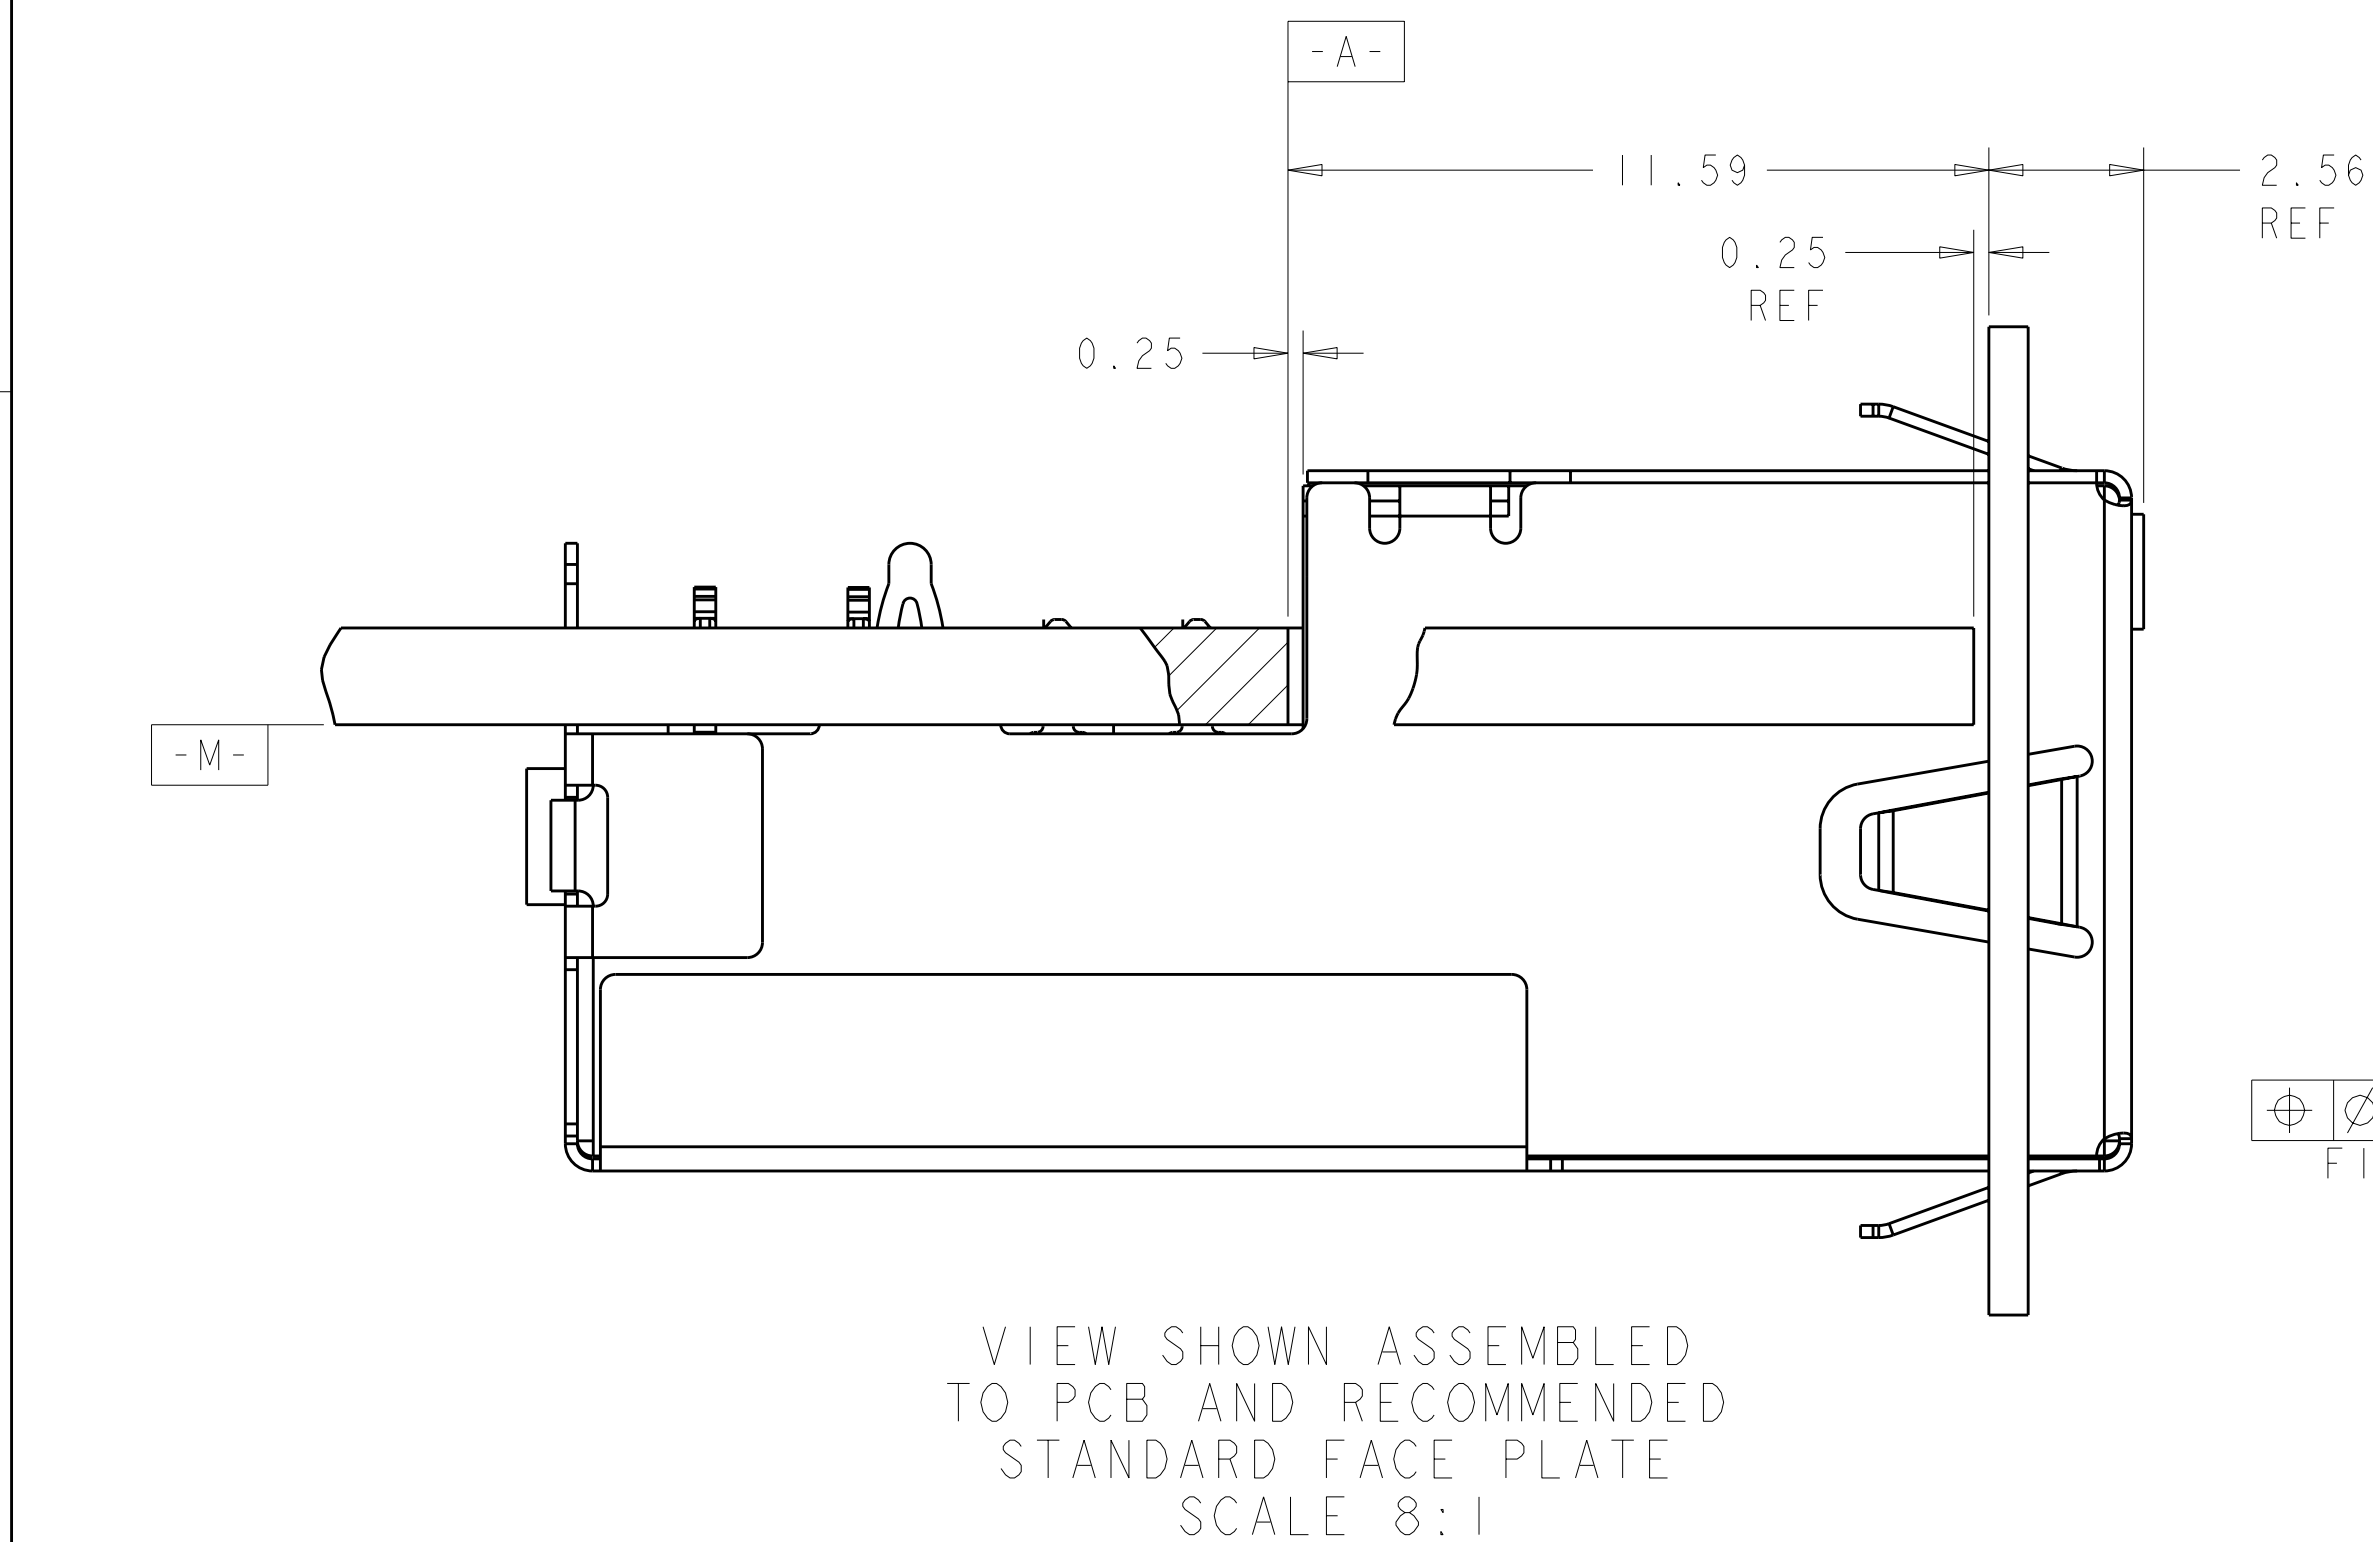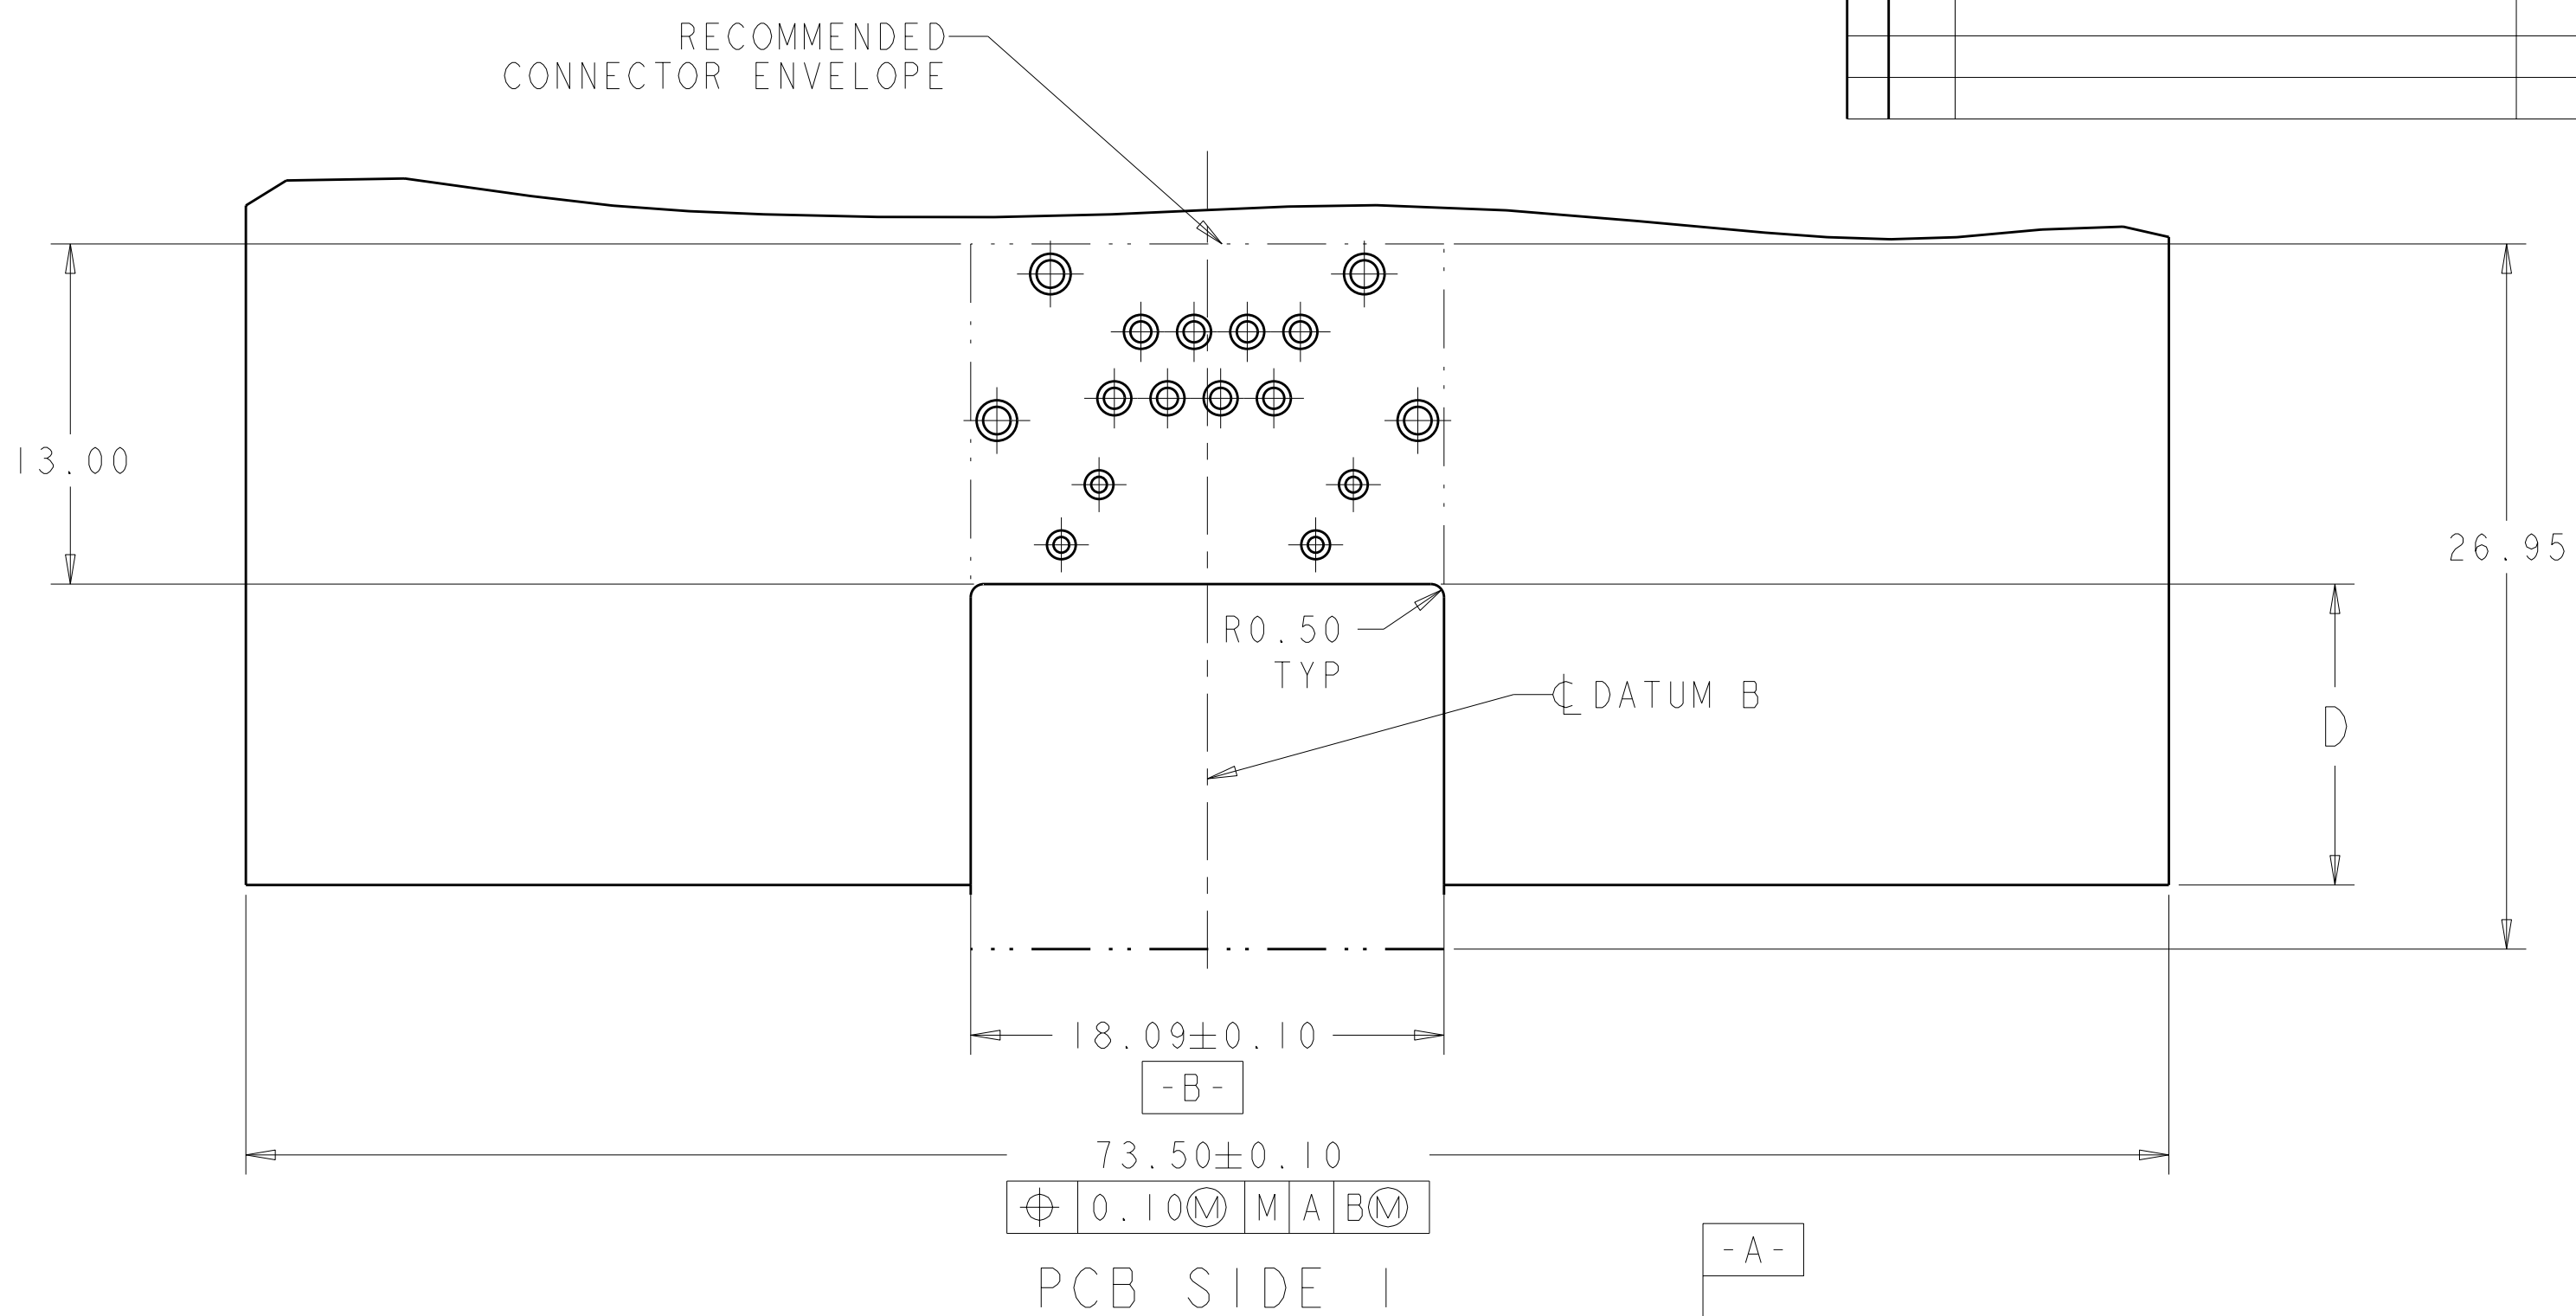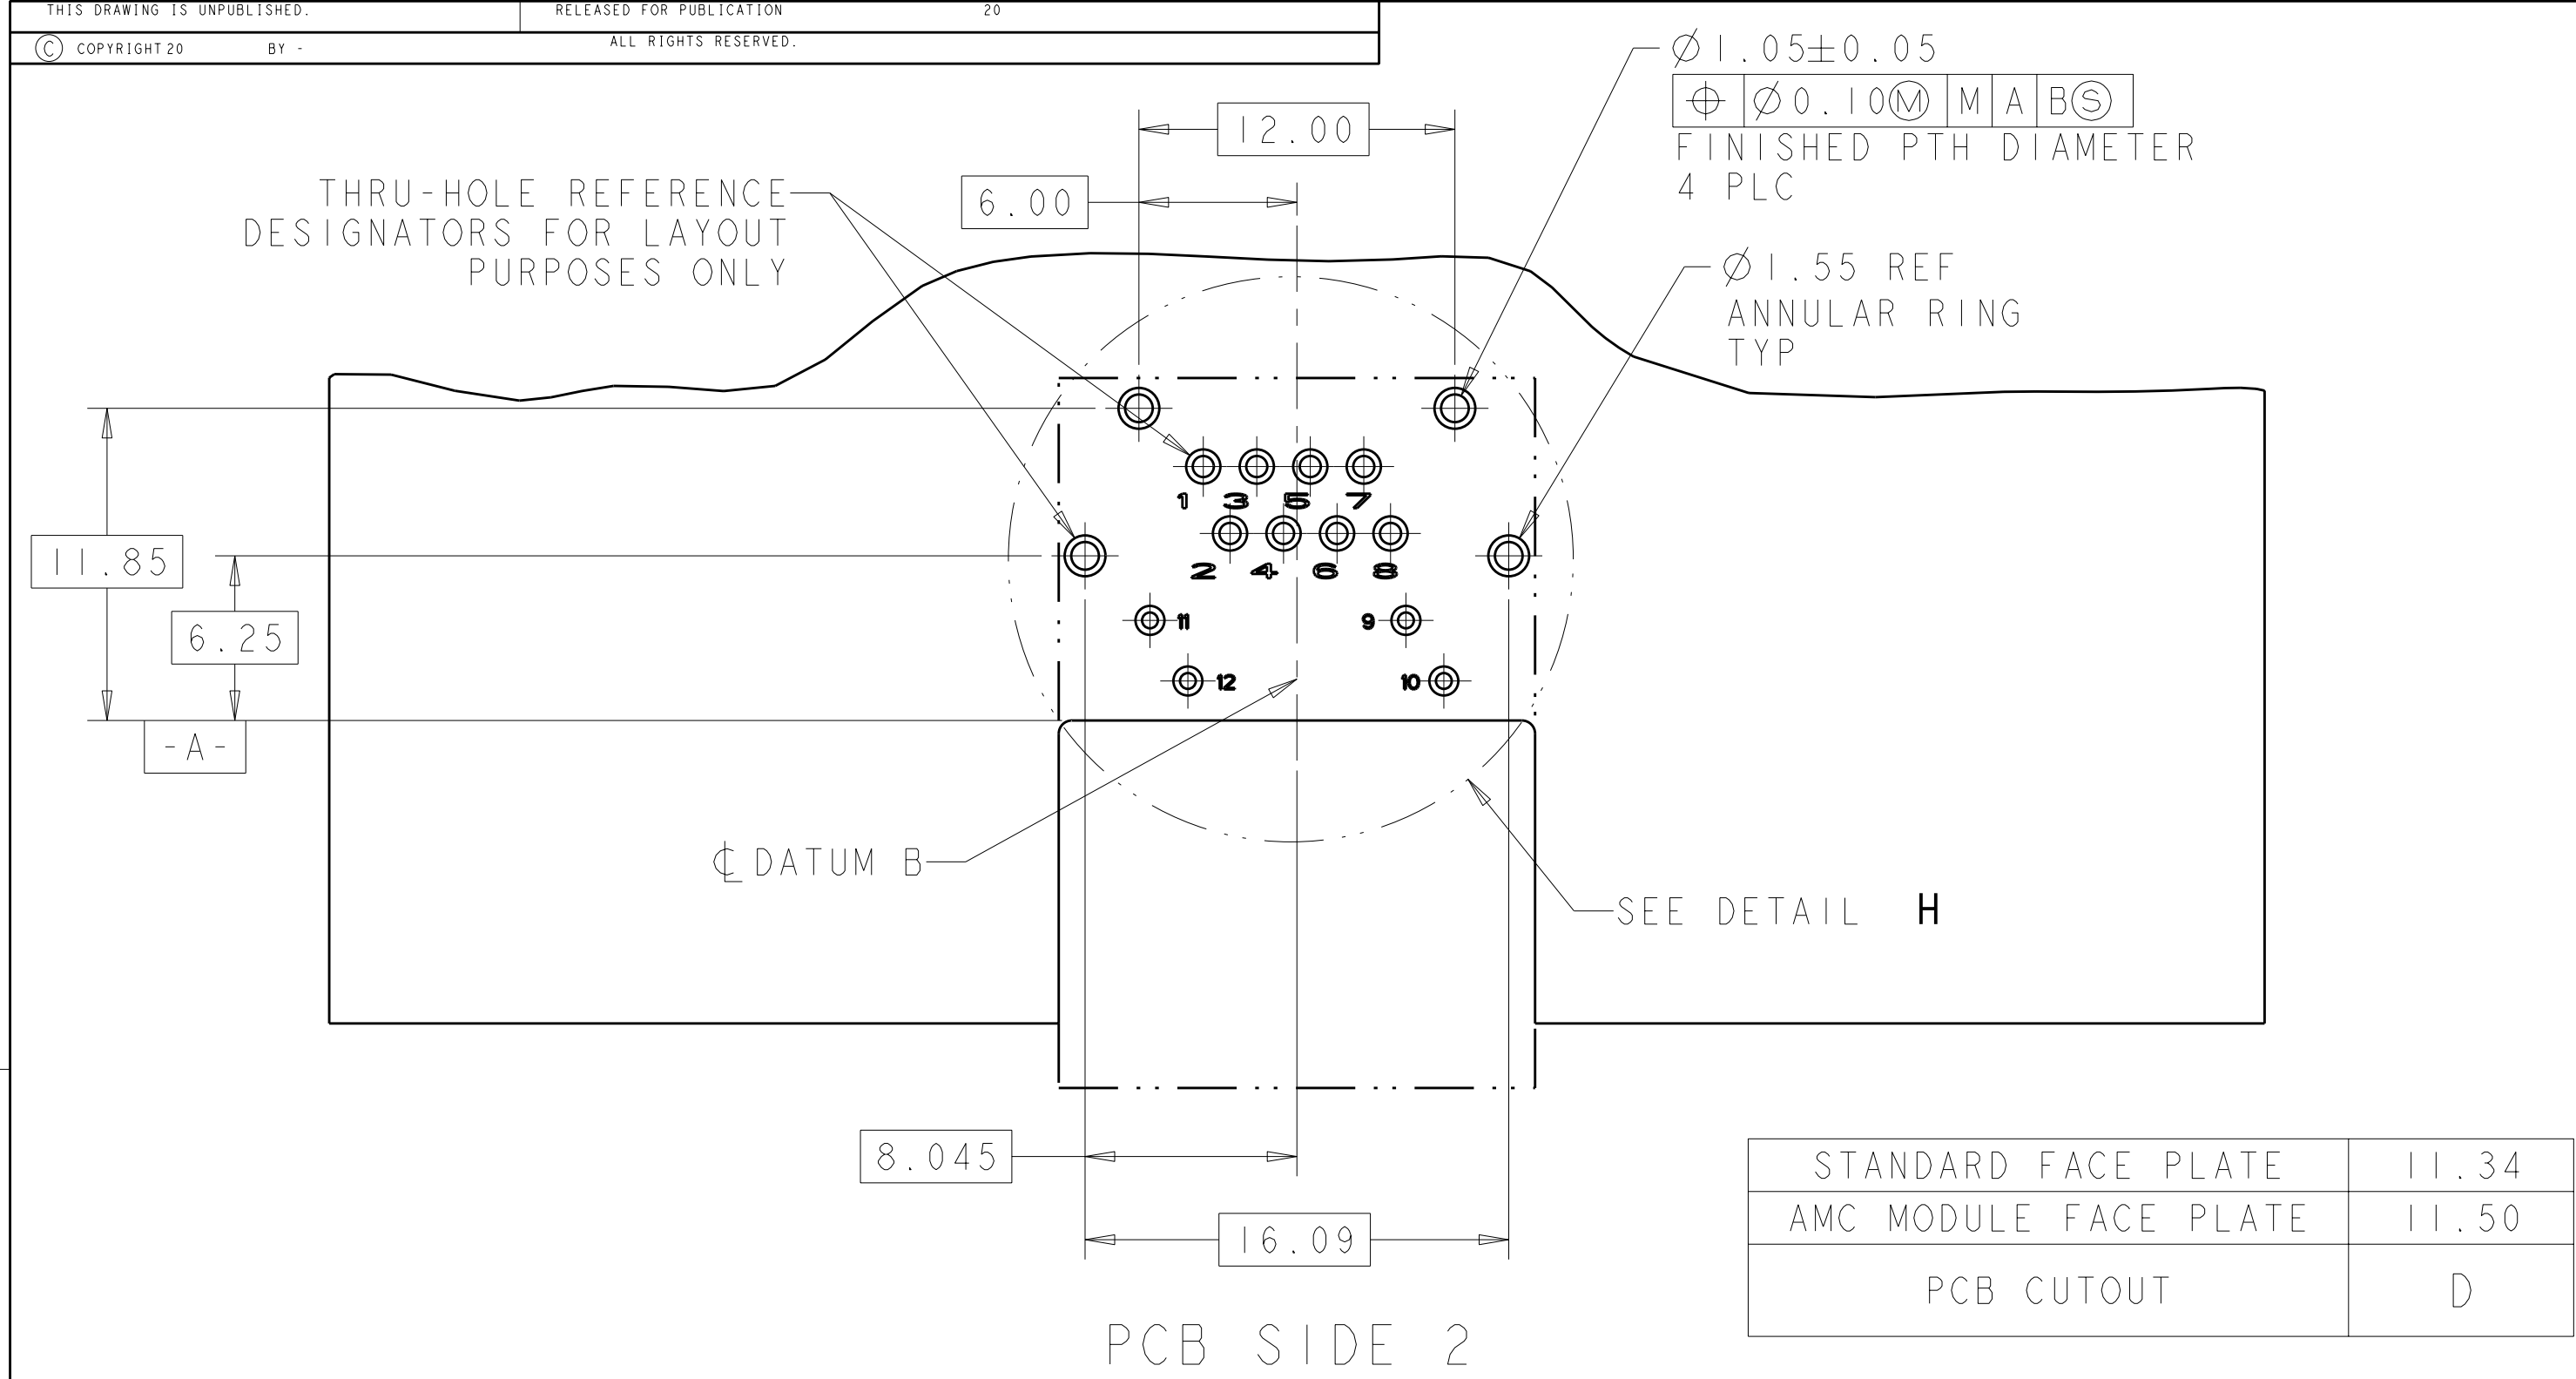

	PIN #	1888250-1	1888250-2	1888250-3	1888250-4	1888250-5
LED 1	9	CATHODE (-)	ANODE (YEL), CATHODE (GRN)	-	CATHODE (-)	CATHODE (-)
	10	ANODE (+)	ANODE (GRN), CATHODE (YEL)	-	ANODE (+)	ANODE (+)
LED 2	11	ANODE (+)	ANODE (GRN), CATHODE (YEL)	-	ANODE (+)	ANODE (+)
	12	CATHODE (-)	ANODE (YEL), CATHODE (GRN)	-	CATHODE (-)	CATHODE (-)

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: MS/L.A.MAYER	15FEB2008	TE Connectivity	
DIMENSIONS:		CHK: J.WESTMAN	15FEB2008	NAME: CONNECTOR ASSEMBLY, LOW PROFILE, PRESS FIT, MODULAR JACK, 1X1, RJ45	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: S.FLICKINGER	15FEB2008	SIZE: CAGE CODE: DRAWING NO: A100779	
mm		PRODUCT SPEC		RESTRICTED TO	
9 PLC ±		108-2274		C=1888250	
3 PLC ±0.13		APPLICATION SPEC		SCALE: 5:1	
3 PLC ±		114-13179		SHEET 2 OF 3	
4 PLC ±		WEIGHT: -		REV C	
ANGLES ±°		CUSTOMER DRAWING			
FINISH SEE NOTE 1					

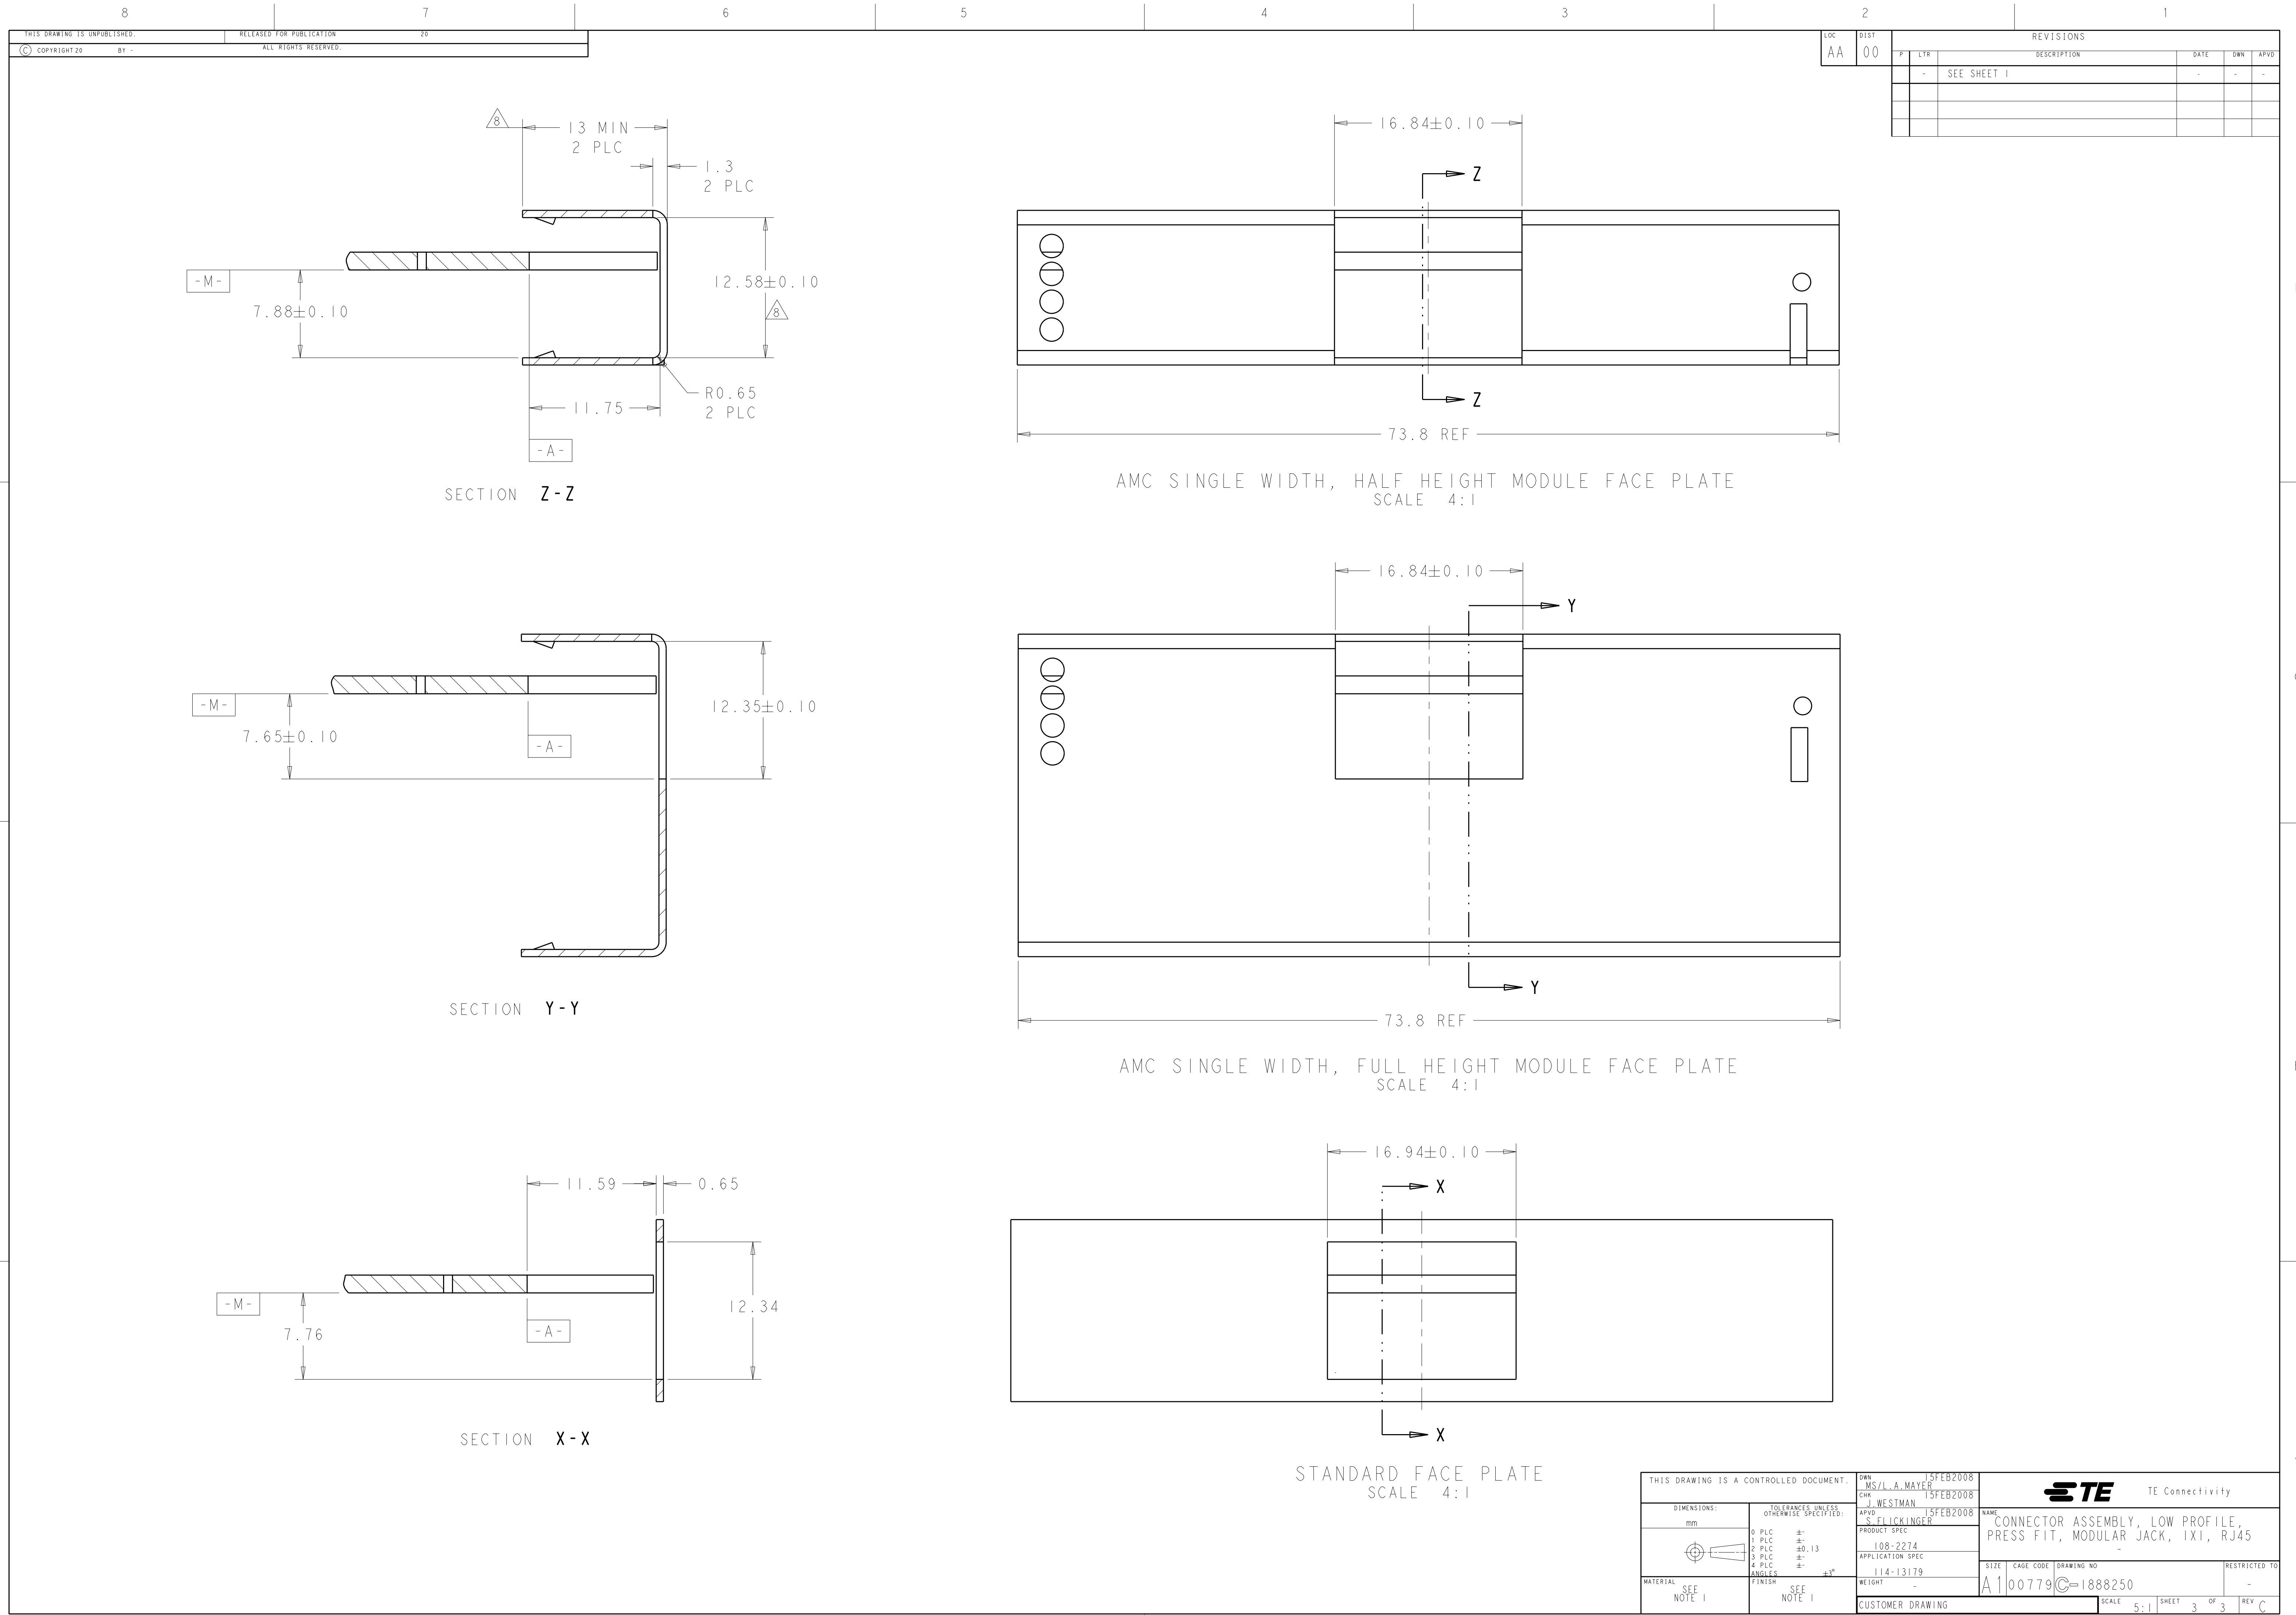

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru