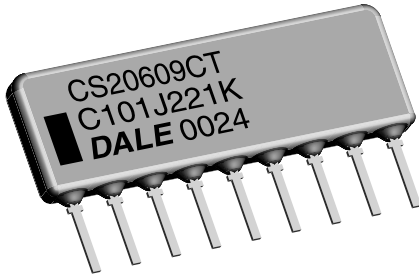


## Thick Film Resistor/Capacitor Networks, Single-In-Line, Conformal Coated SIP



### FEATURES

- 10K ECL terminators, circuits E and M. 100K ECL terminators, circuit A. Line terminator, circuit T
- 4 to 18 pins available
- X7R and C0G capacitors available
- Low cross talk
- Custom design capability
- "B" 0.250" (6.35 mm), "C" 0.350" (8.89 mm) and "E" 0.325" (8.26 mm) maximum seated height available, dependent on schematic
- Compliant to RoHS directive 2002/95/EC
- Halogen-free according to IEC 61249-2-21 definition



Available


**RoHS\***  
COMPLIANT  
HALOGEN  
**FREE**

### STANDARD ELECTRICAL SPECIFICATIONS

VISHAY DALE MODEL	PROFILE	SCHEMATIC	RESISTOR CHARACTERISTICS					CAPACITOR CHARACTERISTICS	
			POWER RATING ELEMENT $P_{70^{\circ}\text{C}}$ W	RES. RANGE $\Omega$	RES. TOL. $\pm \%$	TEMP. COEFF. $\pm \text{ppm}/^{\circ}\text{C}$	TCR TRACKING $\pm \text{ppm}/^{\circ}\text{C}$	CAP. RANGE	CAP. TOL. $\pm \%$
CS206	B	E, M	0.125	10 to 1M	2, 5	200	100	0.01 $\mu\text{F}$	10, 20
CS206	C	T	0.125	10 to 1M	2, 5	200	100	33 pF to 0.1 $\mu\text{F}$	10, 20
CS206	E	A	0.125	10 to 1M	2, 5	200	100	0.01 $\mu\text{F}$	10, 20

### TECHNICAL SPECIFICATIONS

PARAMETER	UNIT	CS206
Operating Voltage (at + 25 $^{\circ}\text{C}$ )	$V_{AC}$	50 maximum
Dissipation Factor (maximum)	%	C0G = 0.15; X7R = 2.5
Insulation Resistance (at + 25 $^{\circ}\text{C}$ /rated voltage)	$M\Omega$	100 000
Dielectric Test	V	2.5 x rated voltage
Operating Temperature Range	$^{\circ}\text{C}$	- 55 to + 125 $^{\circ}\text{C}$

### Capacitor Temperature Coefficient:

C0G maximum 0.15 %, X7R maximum 2.5 %

### Package Power Rating (maximum at 70 $^{\circ}\text{C}$ ):

8 pins = 0.80 W


9 pins = 0.90 W

10 pins = 1.00 W


### EIA Characteristics:

C0G and X7R (C0G capacitors may be substituted for X7R capacitors)


### SCHEMATICS in inches (millimeters)

0.250 (6.35) High  
("B" Profile)


Circuit E

0.250 (6.35) High  
("B" Profile)

Circuit M

0.325 (8.26) High  
("E" Profile)

Circuit A

0.350 (8.89) High  
("C" Profile)

Circuit T

### GLOBAL PART NUMBER INFORMATION

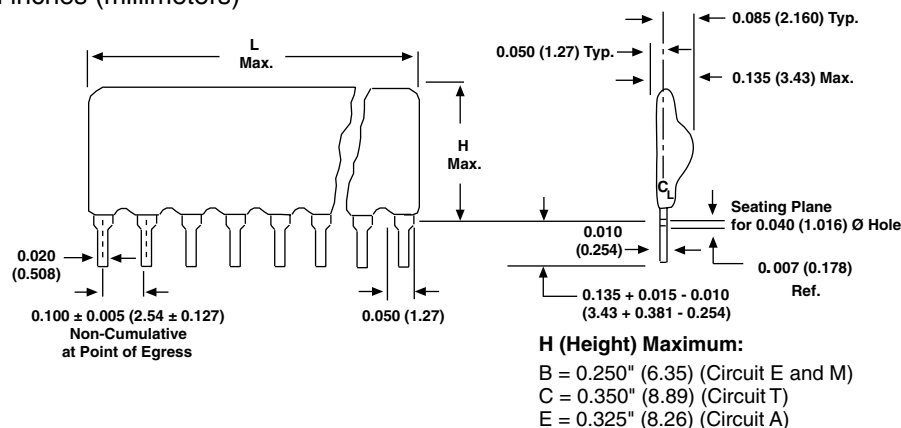
New Global Part Numbering: 20608EC103G471KP (preferred part numbering format)

2	0	6	0	8	E	C	1	0	3	G	4	7	1	K	P		
GLOBAL MODEL	PIN COUNT	PACKAGE/ SCHEMATIC	CHARACTERISTIC	RESISTANCE VALUE	RES. TOLERANCE	CAPACITANCE VALUE	CAP. TOLERANCE	PACKAGING	SPECIAL								
206 = CS206	04 to 18 pin available 04 = 4 Pin 08 = 8 Pin 18 = 18 Pin	E = BE M = BM A = EA T = CT S = Special	C = C0G X = X7R S= Special	2 digit significant figure, followed by a multiplier 100 = 10 Ω 333 = 33 kΩ 105 = 1 MΩ	G = ± 2 % J = ± 5 % S = Special	(in pF) 2 digit significant figure, followed by a multiplier 330 = 33 pF 392 = 3900 pF 104 = 0.1 μF	K = ± 10 % M = ± 20 % S = Special	E = Lead (Pb)-free, bulk P = Tin/lead, bulk	Blank = Standard (Dash Number) (Up to 2 digits)								

Historical Part Number example: CS20608BEC103G471KP03 (will continue to be accepted)

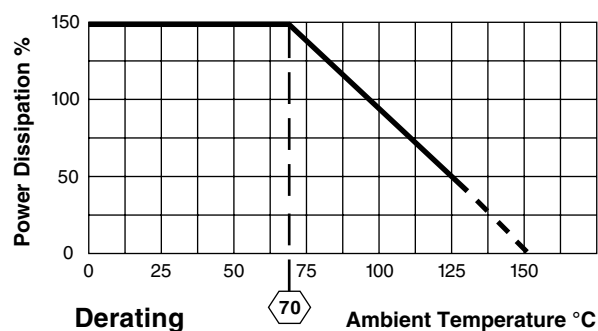
CS206	08	B	E	C	103	G	471	K	P03
HISTORICAL MODEL	PIN COUNT	PACKAGE HEIGHT	SCHEMATIC	CHARACTERISTIC	RESISTANCE VALUE	RESISTANCE TOLERANCE	CAPACITANCE VALUE	CAPACITANCE TOLERANCE	PACKAGING

\* Pb containing terminations are not RoHS compliant, exemptions may apply

**DIMENSIONS** in inches (millimeters)


Pin #1 is extreme left-hand terminal on side with marking.

NUMBER OF PINS	L MAXIMUM	NUMBER OF PINS	L MAXIMUM	NUMBER OF PINS	L MAXIMUM	NUMBER OF PINS	L MAXIMUM	NUMBER OF PINS	L MAXIMUM
4 pin	0.400 (10.16)	7 pin	0.700 (17.78)	10 pin	1.000 (25.40)	13 pin	1.300 (33.02)	16 pin	1.600 (40.64)
5 pin	0.500 (12.70)	8 pin	0.800 (20.32)	11 pin	1.100 (27.94)	14 pin	1.400 (35.56)	17 pin	1.700 (43.18)
6 pin	0.600 (15.24)	9 pin	0.900 (22.86)	12 pin	1.200 (30.48)	15 pin	1.500 (38.10)	18 pin	1.800 (45.72)


**TECHNICAL SPECIFICATIONS**

Flammability	UL 94 V-0
Lead Material	Phosphorus-bronze, solder plated
Body Material	Epoxy coated
Solderability	Per MIL-STD-202, method 208E
Part Marking	Pin #1 identification, part number (abbreviated as space allows), DALE or D, date code
Moisture Resistance	Meets requirements of MIL-STD-202, method 106

**PERFORMANCE**

TEST	CONDITION	MAX. ΔR (Typical Test Lots)
Thermal Shock	Subject to 5 cycles from - 65 °C to + 125 °C	± 0.5 % ΔR
Short Time Overload	2.5 x rated working voltage for 5 s at + 25 °C	± 0.25 % ΔR
Moisture Resistance	Cycle from + 25 °C to + 65 °C to + 25 °C over 8 h at 90 % to 98 % relative humidity, with 10 % of rated power applied, for 20 cycles. Stop cycling after an even number of cycles and stabilize networks at high humidity for 1 h to 4 h. Condition networks at - 10 °C for 3 h, then return to temperature cycling. On completion of cycling condition networks at + 25 °C at 50 % R.H. for 22 h to 24 h	± 0.5 % ΔR
Resistance to Soldering Heat	Immerse pins in melted solder to the lead standoffs at + 350 °C for 3 s max.	± 0.25 % ΔR
Mechanical Shock	18 shocks of 100 g's and 6 ms	± 0.25 % ΔR
Vibration	12 cycles varied logarithmically from 10 Hz to 2000 Hz to 10 Hz over 20 min	± 0.25 % ΔR
Load Life	1000 h at + 70 °C, rated power applied 1.5 h "ON", 0.5 h "OFF"	± 1.0 % ΔR
Resistance to Solvents	Immerse and scrub samples with isopropyl alcohol, trichlorethylene and Freon TMC	Marking remains legible
Solderability	Immerse leads in 60/40 tin-lead solder using R flux at + 245 °C for 5 s maximum	Minimum 95 % solder coverage
Terminal Strength	Withstand 2.2 kg pull 1 min	± 0.25 % ΔR
Case Insulation Resistance	100 V applied between case and terminals tied together	IR = 10 000 MΩ minimum



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)